

Straight Blade Devices, Male Plug, Insulgrip Heavy Duty, Industrial/Commercial Grade, Straight, 2-Pole 3- Wire Grounding, 15A 125V, 5-15P, Single Pack

By Hubbell Wiring Device-Kellems
Catalog # [HBL5299](#)

Straight Blade Devices, Male Plug, Insulgrip Heavy Duty, Industrial/Commercial Grade, Straight, 2-Pole 3- Wire Grounding, 15A 125V, 5-15P, Black, Single Pack

Features

- Fused plug

Application

Industrial/Commercial Grade

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94 HB or better, Environmental - IP Suitability - IP20, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - #18-10 AWG. Standed copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications


EU RoHS Indicator	Contact Manufacturer
Nema Rating	5-15P
Industry Standard(s)	CSA Certified to C22.2 No. 42 File 280

Conductor

Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	15 A
Voltage Rating Description	125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	15 A

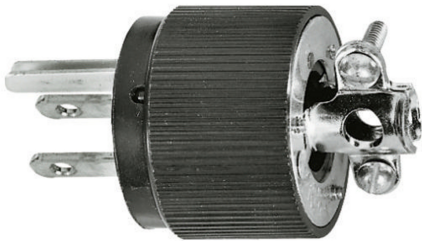

Voltage Rating	125 V
Phase	Single Phase
Current / Amperage Rating	15 A

Dimensions

Weight	0.2 lb.
--------	---------

General

Color	Black
Specifications	- Assembly Screws - Nickel plated steel - Blade Holder - Nylon - Blades - .060 in. (1.5) Brass - Cord Clamp - Plated Steel - Housing - Vinyl - Terminal Clamp - Nickel plated steel - Terminal Screws - #8-32 Brass , multiple drive
UPC	783585013152
Item Type	Insulgrip Plug
Material	Polycarbonate

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	0.50

Product Assets

[Catalog \[English\]](#)
[Catalog Page \[English\]](#)