
HUBBELL
Wiring Device-Kellems

Switches and Lighting Controls, Mechanical Interlock, Replacement Parts, Motor Disconnects, Replacement Ground Buss, For 60A and 100A

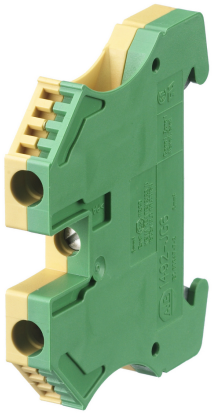

By Hubbell Wiring Device-Kellems
Catalog # HBL60100RGB

Switches and Lighting Controls, Mechanical Interlock, Replacement Parts, Motor Disconnects, Replacement Ground Buss, For 60A and 100A

Features

- Replacement Parts
- Motor Disconnects
- Replacement Ground Buss

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstand 3,000V AC, Electrical - Max Working Voltage - 600V AC RMS, Environmental - Flammability - UL94-5VA and V-0 classification, Environmental - Ingress Protection - IP67 Suitability, Environmental - Operating Temperatures - Max Continuous- 75 °C, Minimum -40 ° w/o Impact, Mechanical - Impact Resistance - In accordance with UL746C, Mechanical - Product Identification - Identification and ratings are a part of the external label and molded into the receptacle mount., Mechanical - Terminal Identification - Terminals identified in accordance with North American and International conventions

Specifications

Standards - RoHS Compliance Status	CM
Industry Standard(s)	UL Listed
EU RoHS Indicator	Yes

Current

Dielectric Strength	Withstands 3000V AC minimum

General

Specifications	• Assembly Screws - Stainless Steel • Gaskets - Neoprene • Hinge Spring - Stainless Steel • Interlock Items - Replacement Parts
Style	Replacement Ground Blocks
Ingress Protection	IP67
UPC	783585955162
Type	Accessories
Series	• Non-Fused • Fused

Logistics

Carton Quantity	10

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact

Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]

© 2026 Hubbell Incorporated. All rights reserved