

Locking Devices, Twist-Lock®, Industrial, Male Plug, 10A 250V/15A 125V, 3-Pole 3-Wire Non-Grounding, Non-NEMA, Screw Terminal, Black and White

By Hubbell Wiring Device-Kellems
Catalog # [HBL7567C](#)

Locking Devices, Twist-Lock®, Industrial, Male Plug, 10A 250V/15A 125V, 3-Pole 3-Wire Non-Grounding, Non-NEMA, Screw Terminal, Black and White

Features

- Individually molded face for each blade configuration keeps debris out of plug interior
- Ribbed nylon housing is impact and chemical resistant
- Roomy wiring chamber provides ample space for wiring

Application

Extra Heavy Duty Industrial

Performance

Electrical-Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Mechanical - Terminal Accommodation - #18 - #10 AWG stranded copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498, Environmental - Flammability - HB or better per UL94/CSA 22.2 No.0.17, Environmental - Moisture Resistance - IP20 Suitability, Environmental - Operating Temperatures - Maximum Continuous 75°C, Minimum -40°C (w/o impact)

Specifications

Standards - RoHS Compliance Status	CM
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Nema Rating	Non-NEMA
Industry Standard(s)	• Certified to CSA C22.2 No.42 • Fed.Spec.W-C-596

Conductor


Number Of Wires	3-Wire Non-Grounding
Wire Size	#18 AWG to #10 AWG
Number Of Poles	3-Pole

Configuration

Cord Type	All Listed Portables
-----------	----------------------

Current

Amperage Rating	10 A
-----------------	------

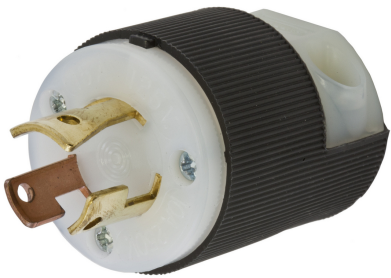

Voltage Rating Description	250/125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	10 A
Voltage Rating	250/125 V
Connectivity	Screw Terminals
Phase	Single Phase
Current / Amperage Rating	10 A

Dimensions

Length	1.53 in
Display Size	Standard Sized
Weight	0.15 lb.
Height	1.97 in
Width	1.53 in
Dimensions	1.53 in x 1.53 in x 1.97 in

General

Color	Black, White
Cord Range	0.230"-0.720"(5.8-18.3)
Specifications	• Blade/Contact Carrier - Natural (white) nylon • Blades/Contacts - Brass • Cord Clamp - Natural (white) nylon • Grounding Screw - Brass (green finish) • Housing - Black nylon • Terminal Retainer - Clear polycarbonate

Listings	• Fed.Spec. W-C-596 • CSA C22.2 No.42
UPC	783585178752
Material - Mounting Hardware	Cord Mounted
Item Type	10A/15A Insulgrip® Plug
Material	Nylon

Logistics

Pallet Quantity	6600
Carton Quantity	10

Operational

Operating Temperature

Maximum continuous 75°C and
minimum -40°C without Impact

Product Assets

[Catalog \[English\]](#)

[Catalog Page \[English\]](#)

[Installation Manual \[Spanish, French, English\]](#)



A Hubbell brand