


HUBBELL
Wiring Device-Kellems

**Locking Devices, Twist-Lock®, Industrial,
Duplex Receptacle, 10A 250V/15A 125V, 3-
Pole 3-Wire Non Grounding, Non- NEMA,
Screw Terminal, Black**

By Hubbell Wiring Device-Kellems
Catalog # [HBL7580G](#)

Locking Devices, Twist-Lock®, Industrial, Duplex Receptacle, 10A
250V/15A 125V, 3-Pole 3-Wire Non Grounding, Non- NEMA,
Screw Terminal, Black

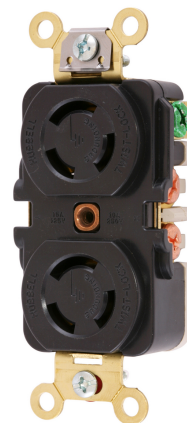

Features

- Reinforced thermoplastic construction
- Single piece, all brass contacts
- Single point break-off tabs
- Mounting strap tabs lock the body and base together

Application

Heavy Duty Industrial

Performance

Electrical - Dielectric Voltage - Withstands 2,000V minimum,
Environmental - Flammability - V2 or better per UL94/CSA 22.2 No.0.17, Environmental - Moisture Resistance - IP20 Suitability,
Environmental - Operating Temperatures - Maximum Continuous 75°C Minimum -40°C (w/o impact), Mechanical - Terminal Accommodation - #18 AWG -#10 AWG solid or stranded copper wire only., Mechanical - Terminal Accommodation - #18-#10 AWG solid or stranded copper wire., Mechanical - Terminal Identification - Terminals identified in accordance with UL 498

Specifications

Standards - RoHS Compliance Status	CM
Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Industry Standard(s)	• Certified to CSA C22.2 No.42 • Fed. Spec. W-C-596 • Listed to UL 498

Conductor

Number Of Wires	3-Wire
Wire Size	#18 AWG to #10 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	10/15 A
Voltage Rating Description	250/125 V
Dielectric Strength	Withstands 2,000V minimum



Current Rating	10 A
Voltage Rating	250/125 V
Connectivity	Back and Side Wired Screw Terminals
Phase	Single Phase
Current / Amperage Rating	10/15 A

Dimensions

Length	3.29 in
Display Size	Standard Sized Product
Weight	0.3 lb.
Height	1.17 in
Width	1.7 in
Dimensions	3.29 in x 1.7 in x 1.17 in

General

Specifications	• Base - RTP • Clamp - Brass • Contacts - Brass • Face - RTP • Ground Contact - Brass • Terminal Screws - Brass
UPC	783585002361
Type	Receptacle
Material - Mounting Hardware	Screw Mounting
Item Type	10A/15A Grounding Duplex Flush Receptacle
Material	Thermoplastic

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
-----------------------	--

Product Assets

- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Installation Manual \[English\]](#)