

HUBBELL
Wiring Device-Kellems

PRODUCT BROCHURE

Cord Reels

Trusted robust cord reels and accessories





Reliable and convenient power for industrial, commercial and medical locations

Hubbell's redesigned ranges of cord reels deliver power safely and reliably, exactly where you need it. Engineered for the most demanding environments, we offer several durable and flexible solutions to deliver power to the workforce in industrial, commercial and medical locations. Put power inREACH®!

inREACH® Motorized Cord Reels

Hubbell's inREACH motorized cord reels provide a safer and more accessible cable management solution than ever before. With the press of a switch, users can easily access power cords from above.

- Durable and lightweight corrosion aluminum housing
- Impact-resistant thermoplastic cover
- Large motor ensures long product life
- Automatic stop
- Easy installation
- Configurable cord lengths and gauges
- Choice of black or white reel housing

Applications

- | | | |
|-------------------------|---------------------------------|--|
| • Big box retail stores | • Aircraft hangars | • Manufacturing facilities |
| • Classrooms | • Arenas and convention centers | • Distribution and fulfillment centers |
| • Laboratories | | |



inREACH Weatherproof and Industrial Cord Reels

inREACH Industrial and Industrial Weatherproof Cord Reels are listed to UL 355 and CSA, C22.2 No. 308 with a durable, lightweight low profile cast aluminum construction. inREACH reels also feature an accessory mounting bracket for quick, easy installation on any surface.


- Durable, corrosion resistant cast aluminum construction
- Yellow, white or black powder coat finish
- Movable guide arm can be mounted in two positions
- Positive latch mechanism automatically maintains desired cord length
- Ratchet lock can be disengaged in field for constant tension applications
- 16-6AWG cord for greater current carrying capacity

Industrial Cord Reels

- UL Type 1
- 250V AC, SJO Type Cable
- Plug-in 5 ft long power cord requires no electrical wiring

Weatherproof Cord Reels

- UL Type 4
- 600V AC, SOW Type Cable

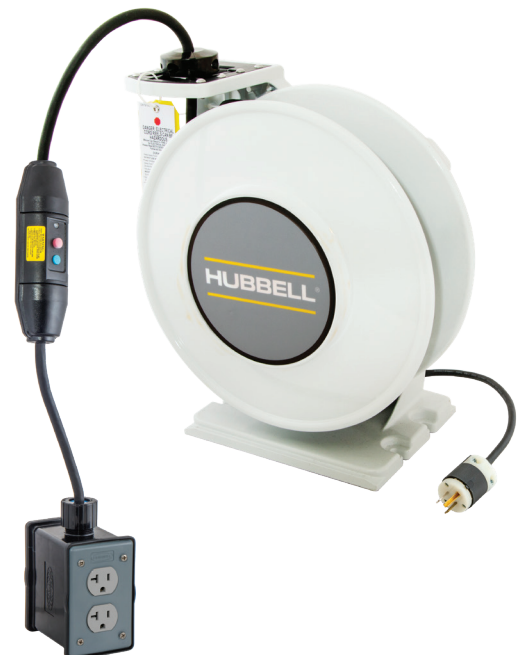

inREACH® Industrial Lighted Cord Reels

Enhance user safety and optimize efficiency with inREACH Industrial Lighted Cord Reels. These cord reels provide reliable illumination where it is required, even in the most challenging industrial settings.

- Durable, corrosion resistant cast aluminum construction
- UL Type 1
- Multi position arm can be mounted in two different positions
- Positive latch mechanism automatically maintains desired cord length
- Ratchet lock can be disengaged in field for constant tension applications

Applications

- Manufacturing
- Mining
- Arenas and convention centers
- Big box retail
- Automotive



inREACH Medical Cord Reels

inREACH Medical Cord Reels provide safe and convenient power designed specifically for medical facilities. Hospital Grade plugs and receptacles provide the most reliable performance in demanding medical applications.

- Cast aluminum housing withstands corrosive environments
- Hospital grade, tamper-resistant receptacles provide four plug-in points
- Fully-illuminated LED face clearly indicates available power
- All-white construction complies with sanitary practices by making contamination more visible and easier to clean



inREACH Category 6 Data Cord Reels

Cat6 Data Reels feature a durable and lightweight cast aluminum construction. An improved mounting plate design allows customers to upgrade existing installations or utilize Hubbell's innovative mounting bracket for a quick, easy installation on any surface.

- Moveable guide arm can be mounted in horizontal payout and vertical lift positions
- Gold-on-gold slip ring maintains Ethernet communications

Applications

- Manufacturing
- Education
- Hospitals
- Data centers
- Healthcare




inREACH® Mounting Bracket

Save additional labor time associated with installing reels at the end of the job. The inREACH mountings bracket can be installed during the early stages of a project, allowing for trim out of the cord reel later, saving time.



STEP 1



Secure the inREACH mounting bracket during the rough-in process

STEP 2



Remove two hex bolts from the bracket. Slide the reel into the bracket

STEP 3



Replace two hex bolts and secure screws to complete the job

inREACH Plenum Rated Enclosure

Hubbell's inREACH plenum rated enclosure is the first of its kind, allowing customers to securely mount cord reels in drop ceilings, while isolating them from the plenum space. These enclosures are listed to UL2416, making them compliant with plenum requirements per the NEC.



STEP 1



The plenum enclosure is easily secured to the building structure using threaded rods

STEP 2



Install almost any Hubbell inREACH cord reel using factory provided hardware and included four inch square electrical box

AFTER



Improve aesthetics while maintaining code compliance

Heavy Duty Industrial and Weatherproof Cord Reels

Heavy Duty Industrial Weatherproof Reels are engineered for the most arduous and demanding environments, with a 600V rating and UL Type 4 enclosure rating. Designed for use with 15, 20, and 30 amp industrial products such as portable outlet boxes, Insulgrip® and Twist-Lock® devices and pendant push-button stations.

- Powder coated, solid US steel construction
- Ratchet lock can be disengaged in field for constant tension application
- UL Type 4 enclosure offers corrosion protection
- 3/4 NPT conduit hub
- Optional pivot base allows 340 degree rotation of the reel, increasing the range of cable to nearly any direction

Applications

- Manufacturing
- Outdoor locations
- Government



Static Discharge Reels

Static Discharge Reels ground portable equipment operating in hazardous environments. When properly clamped to ground, the static discharge reel will prevent the build-up of static electricity and reduce the chance of sparking, which may cause an explosion.

- Steel housing construction available with steel or nylon coated steel cable
- Compact design minimizes required installation space
- Large grounding jaw clamp provides low resistance ground termination

Applications

- Aircraft
- Chemical plants
- Agriculture



Commercial Cord Reels

Commercial cord reels are designed for commercial and light industrial environments. UL listed, the reels feature a steel or non-metallic construction and a 125V rating with SJT type cord to provide power and lighting exactly where you need it.

Steel

- Compact, durable steel construction
- Flexible mounting options for ceiling, wall or bench
- Automatic ratchet lock maintains desired cord length and easy, smooth retraction

Non-metallic

- Durable lightweight non-metallic housing
- 40 ft of 12/3 cord for greater current carrying capacity
- Triple tap outlet with supplemental overcurrent protection

Applications

- Retail
- Big box store
- Automotive repair



Commercial Lighted Cord Reels

Commercial Lighted Cord Reels provide light where you need it. Cord reels with attached hand lamps. Available in a range of lamp options: incandescent, fluorescent and LED.

- Flash light or floor light capable with end light feature
- Desired cord length automatically maintained through positive latch mechanism
- Constructed of durable corrosion-resistant steel
- Covered on/off switch located on the handle to control side and end LEDs

Applications

- Entertainment
- Industrial
- Education



Ordering Information

inREACH® Motorized Cord Reels

Description	Amps	Volts AC	Cable Length Feet (m)	Cable Type	Weight lbs (kg)	Catalog Number
White motorized reel without end effectors	20	125 125/250	25 (7.6)	12/3 SJO 12/4 SJO	32 (14.5) 33 (15.0)	HBLM25123 HBLM25124
	20	125 125/250	45 (13.7)	12/3 SJO 12/4 SJO	35 (15.9) 37 (16.8)	HBLM45123 HBLM45124
	20	125V 125/250	75 (22.9)	12/3 SJO 12/4 SJO	40 (18.1) 43 (19.5)	HBLM75123 HBLM75124
	30	125 125/250	25 (7.6)	10/3 SJO 10/4 SJO	35 (15.9) 37 (16.8)	HBLM25103 HBLM25104
	30	125 125/250	45 (13.7)	10/3 SJO 10/4 SJO	40 (18.1) 45 (20.4)	HBLM45103 HBLM45104
	30	125	60 (18.3)	10/3 SJO	44 (22.0)	HBLM60103
	20	125	25 (7.6) 45 (13.7)	12/3 SJO	32 (14.5) 35 (15.9)	HBLM25123BLK HBLM45123BLK
Black motorized reel without end effectors	20	125	25 (7.6) 45 (13.7)	12/3 SJO	32 (14.5) 35 (15.9)	HBLM25123BLK HBLM45123BLK
White motorized reel with white cable and no end effectors	20	125	25 (7.6) 45 (13.7)	12/3 SJO	32 (14.5) 35 (15.9)	HBLMWC25123 HBLMWC45123
White motorized reel with (1) 20A Insulgrip plug	20	125	25 (7.6) 45 (13.7)	12/3 SJO	33 (15.0) 36 (16.3)	HBLM25123C20 HBLM45123C20
White motorized reel with (2) 20A tamper resistant duplex receptacles	20	125	25 (7.6)	12/3 SJO	34 (15.4)	HBLM25123R220M1
White motorized reel with (1) 20A tamper resistant duplex receptacle	20	125	25 (7.6) 45 (13.7)	12/3 SJO	34 (15.4) 37 (16.8)	HBLM25123GF20M1 HBLM45123GF20M1
White motorized reel with GFCI module and (2) 20A tamper resistant duplex receptacles	20	125	25 (7.6) 45 (13.7)	12/3 SJO	34 (15.4) 37 (16.8)	HBLM25123GF220M1 HBLM45123GF220M1
White reel with a white cord and (2) 20A tamper resistant duplex receptacles	20	125	25 (7.6) 45 (13.7)	12/3 SJO	34 (15.4) 37 (16.8)	HBLMWC25123R220M2 HBLMWC45123R220M2
Black motorized reel with (2) tamper resistant duplex receptacles	20	125	25 (7.6) 45 (13.7)	12/3 SJO	34 (15.4) 37 (16.8)	HBLM25123BLKR220M1 HBLM45123BLKR220M1
White motorized reel with (2) 20A tamper resistant duplex receptacles	20	125	45 (13.7)	12/3 SJO	37 (16.8)	HBLM45123R220M1
White motorized reel with (1) L14 20A Twist lock plug and (1) female L14 plug	20	125/250	25 (7.6) 45 (13.7) 75 (22.9)	12/4 SJO	34 (15.4) 37 (16.8) 37 (16.8)	HBLM25124C HBLM45124C HBLM75124C
	30	125/250	25 (7.6) 45 (13.7)	10/4 SJO	34 (15.4) 36 (16.3)	HBLM25104C HBLM45104C
White motorized reel with (1) L14 20A Twist lock plug and (2) 20A duplex receptacles	20	125/250	25 (7.6) 45 (13.7) 75 (22.9)	12/4 SJO	34 (15.4) 36 (16.3) 37 (16.8)	HBLM25124SC HBLM45124SC HBLM75124SC
	30	125/250	25 (7.6) 45 (13.7)	10/4 SJO	36 (16.3) 36 (16.3)	HBLM25104SC HBLM45104SC

Control Switch Accessories

Description	Catalog Number
Low voltage, decorator push-button switch, single pole, momentary contact, 100mA 30V DC, two button, white	DSM30W2
Low voltage, specification grade, toggle switch, momentary, single pole double throw, 5A 24V DC, white	HBL1557WLV
Industrial grade, toggle switch, momentary single pole, double throw center off, 15A 120/277V AC	HBL1556LW
Locking key for HBL1556LW	HBL1209
Industrial grade, toggle switch, momentary single pole, double throw center off, 15A 120/277V AC	HBL1556W

inREACH® Industrial Cord Reels

Description		Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White industrial reel without end effectors		15A	250V AC	45 (13.7)	14/3 SJO 14/4 SJO	24.0 (10.9) 25.4 (11.5)	HBLI45143 HBLI45144
		20A	250V AC	45 (13.7)	12/3 SJO	26.5 (12.0)	HBLI45123
		18A	250V AC	70 (21.3) 90 (27.43)	12/3 SJO 12/3 SJO	79.6 (36.1) 86.5 (39.2)	HBLI70123 HBLI90123
		20A	250V AC	45 (13.7)	12/4 SJO	29.8 (13.5)	HBLI45124
		16A	250V AC	80 (24.4)	12/4 SJO	76.1 (34.5)	HBLI80124
		30A	250V AC	45 (13.7) 40 (12.2)	10/3 SJO 10/4 SJO	32.4 (14.7) 33.7 (15.3)	HBLI45103 HBLI40104
		25A	250V AC	80 (24.4) 80 (24.4)	10/3 SJO 10/4 SJO	104.3 (47.3) 113.3 (51.4)	HBLI80103 HBLI80104
Industrial reel without end effectors	white reel with white cord black reel with black cord	20A	250V AC	45 (13.7)	12/3 SJO	26.5 (12.0)	HBLIWC45123 HBLI45123BLK
White industrial reel	with HBL5269C	15A	125V AC	45 (13.7)	14/3 SJO	24.0 (10.9)	HBLI45143C15
	with HBL5369C with HBL2313	20A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0) 26.5 (12.0)	HBLI45123C20 HBLI45123TL20
White industrial reel with yellow portable outlet box	(1) 15A duplex receptacle (2) 15A duplex receptacles	15A	125V AC	45 (13.7)	14/3 SJO	24.0 (10.9) 24.0 (10.9)	HBLI45143R15 HBLI45143R215
	GFCI module and (1) 15A duplex receptacle GFCI module and (2) 15A duplex receptacles	15A	125V AC	45 (13.7)	14/3 SJO	24.0 (10.9) 24.0 (10.9)	HBLI45143GF15 HBLI45143GF215
White industrial reel with black portable outlet box	(1) 15A duplex receptacle (2) 15A duplex receptacles	15A	125V AC	45 (13.7)	14/3 SJO	24.0 (10.9) 24.0 (10.9)	HBLI45143R15M1 HBLI45143R215M1
	GFCI module and (2) 15A duplex receptacles	15A	125V AC	45 (13.7)	14/3 SJO	24.0 (10.9)	HBLI45143GF215M1
White industrial reel with yellow portable outlet box	(1) 20A duplex receptacle (2) 20A duplex receptacles	20A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0) 26.5 (12.0)	HBLI45123R20 HBLI45123R220
	GFCI module and (1) 20A duplex receptacle GFCI module and (2) 20A duplex receptacles	20A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0) 26.5 (12.0)	HBLI45123GF20 HBLI45123GF220
White industrial reel with black portable outlet box	(1) 20A duplex receptacle (2) 20A duplex receptacles	20A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0) 26.5 (12.0)	HBLI45123R20M1 HBLI45123R220M1
	GFCI module and (2) 20A duplex receptacles	20A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0)	HBLI45123GF220M1
White industrial reel with GFCI module and triple tap outlet		15A	125V AC	45 (13.7)	12/3 SJO	26.5 (12.0)	HBLI45123GFTT

15A reels are supplied with HBL5266C on the power supply cord. 20A reels are supplied with HBL5366C on the power supply cord. | For shorter cable lengths, modify length indication in catalog number (i.e. HBLIXX); 35ft & 25ft lengths are available. | For yellow reel, add 'Y' suffix to catalog number.

inREACH® Mounting Accessories

Description	Weight lbs. (kg)	Catalog Number
Mounting bracket	2.5 (1.1)	HBLIMB
Mounting bracket with junction box mount	3.0 (1.4)	HBLIMBJ
Mounting bracket	3.5 (1.6)	HBLIACCMB
Mounting bracket with junction box mount	4.0 (1.8)	HBLIACCMBJ
340° pivot base	3.5 (1.6)	HBLI340PB
Plenum rated enclosure	30.0 (13.6)	HBLIPRBOX

Consult with manufacturer for compatible cord reel models.

inREACH™ Replacement Parts

Description	Weight lbs. (kg)	Cable Type	Catalog Number
Replacement stop	0.2 (.09)	16AWG	HBLI16BS
		14AWG	HBLI14BS
		12AWG	HBLI12BS
		10AWG	HBLI10BS

Ordering Information

inREACH® Weatherproof Industrial Cord Reels

Description	Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White weatherproof industrial reel	15A	600V AC	45 (13.7)	14/3 SOW	28.2 (12.8)	HBLW45143W*
				14/4 SOW	30.0 (13.6)	HBLW45144W*
	20A	600V AC	45 (13.7)	12/3 SOW	31.3 (14.2)	HBLW45123W*
			40 (12.2)	12/4 SOW	32.2 (14.6)	HBLW40124W*
	30A	600V AC	40 (12.2)	10/3 SOW	33.3 (15.1)	HBLW40103W*
			35 (10.7)	10/4 SOW	34.2 (15.5)	HBLW35104W*
	18A	600V AC	80 (24.4)	12/3 SOW	97.5 (44.2)	HBLW80123W
	16A	600V AC	80 (24.4)	12/4 SOW	107.4 (48.7)	HBLW75124W
	25A	600V AC	75 (22.9)	10/3 SOW	103.8 (47.1)	HBLW75103W
	20A	600V AC	75 (22.9)	10/4 SOW	116.2 (52.7)	HBLW75104W
	40A	600V AC	45 (13.7)	8/3 SOW	106.5 (48.3)	HBLW4583W
	30A	600V AC	60 (18.3)	8/3 SOW	123.2 (55.9)	HBLW6083W
	35A	600V AC	45 (13.7)	8/4 SOW	122.8 (55.7)	HBLW4584W
	55A	600V AC	45 (13.7)	6/3 SOW	123.0 (55.8)	HBLW4563W
	55A	600V AC	45 (13.7)	6/4 SOW	126.7 (57.5)	HBLW4564W
	14A	600V AC	45 (13.7)	12/8 SOW	107.4 (48.7)	HBLW45128W
	6A	600V AC	45 (13.7)	14/12 SOW	113.5 (51.5)	HBLW451412W

All industrial weatherproof cord reels are supplied with wire leads and 3/4" , 1", or 1 1/4" NPT hub feed depending on the model. | Power supply cable not supplied. | *For shorter cable lengths, modify length indication in catalog number (i.e. HBLWXX); 35ft & 25ft lengths are available. | *For yellow reel, remove 'W' suffix from catalog number.

inREACH® Industrial Lighted Cord Reels

Description	Watts	Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White industrial reel with LED hand lamp, with end light	8+1	0.07A	120V AC	45 (13.7)	16/3 SJO	22.9 (10.4)	HBLI45163LED
White industrial reel with incandescent hand lamp	100	0.8A	125V AC	45 (13.7)	45 (13.7)	22.9 (10.4)	HBLI45163IN

15A reels are supplied with HBL5266C on the power supply cord. | For shorter cable lengths, modify length indication in catalog number (i.e. HBLIXX); 35ft & 25ft lengths are available. | For yellow reel, add 'Y' suffix to catalog number.

inREACH® Category 6 Data Reels

Description	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White data reel with RJ45 plugs	50 (15.2)	Cat 6	22.9 (10.4)	HBLI50CAT6W
Black data reel with RJ45 plugs	50 (15.2)	Cat 6	22.9 (10.4)	HBLI50CAT6

inREACH® Medical Cord Reels

Description	Amps	Volts	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White reel white portable outlet box, GFCI module, and (2) 20A hospital grade receptacles	20	125V AC	45 (13.7)	12/3 SJO	34.9 (15.8)	HBLIWC45123GF220HG
White reel white portable outlet box, and (2) 20A hospital grade receptacles	20	125V AC	45 (13.7)	12/3 SJO	34.4 (15.6)	HBLIWC45123R220HG
White reel and hospital grade connector HBL8319C	20	125V AC	45 (13.7)	12/3 SJO	33.6 (15.2)	HBLIWC45123C20HG

Heavy Duty Industrial Weatherproof Reels

Description	Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
14" yellow weatherproof reel	15A	600V AC	50 (15.2)	14/3 SOW A	55 (24.9)	HBL501431W
16" yellow weatherproof reel	20A	600V AC	50 (15.2)	12/3 SOW A	80 (36.3)	HBL501232W
	16A			12/4 SOW A	86 (39.0)	HBL501242W
	25A			10/3 SOW A	86 (39.0)	HBL501032W
	20A			10/4 SOW A	92 (41.7)	HBL501042W
16" white weatherproof reel	20A	600V AC	50 (15.2)	12/3 SOW A	80 (36.3)	HBL501232WM1
	25A	600V AC		10/3 SOW A	86 (39.0)	HBL501032WM1

All heavy duty industrial cord reels are supplied with wire leads and 3/4" NPT hub feed. Power supply cable not supplied.

Commercial Cord Reels

Description	Watts	Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
Black reel with triple tap outlet	1,875	15A	125V AC	40 (12.2)	12/3 SJTW	9.0 (4.1)	HBLC40123TT
Black reel with wire leads	1,875	15A	125V AC	40 (12.2)	12/3 SJTW	9.0 (4.1)	HBLC40123
White reel with triple tap outlet and white cord	1,250	10A	125V AC	30 (9.1)	16/3 SJT	8.5 (3.9)	HBLC30163TT
White reel with single connector and white cord	1,875	15A	125V AC	20 (6.1)	14/3 SJT	8.5 (3.9)	HBLC20143C
Yellow reel with HBL5969VBLK connector	1,250	10A	125V AC	25 (7.6)	16/3 SJT	8.5 (3.9)	HBLC25163C
Yellow reel with wire leads	1,250	10A	125V AC	25 (7.6)	16/3 SJT	8.5 (3.9)	HBLC25163

Commercial reels supplied with 2 ft. power supply cord and molded on straight blade 15A plug.

Commercial Lighted Cord Reels

Description	Watts (max)	Amps	Voltage	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
White reel with LED hand lamp, with flashlight end	8+1	0.65	125V AC	40 (12.2)	18/2 SJTOW	8.2 (3.7)	HBLC40182LED
White reel with non-metallic incandescent hand lamp and automatic shut off switch	75	0.6	125V AC	25 (7.6)	16/3 SJT	9.0 (4.1)	HBLC25163AIN*
Yellow reel with metallic incandescent hand lamp with receptacle	1,625	13	125V AC	25 (7.6)	14/3 SJT	9.5 (4.3)	HBLC25143IN

Automatic shut off switch allows electrical cord reel installation to conform to Article 511 of the NEC concerning installation of electrical devices in commercial garages, repair facilities and storage locations by positioning the switch above the defined area where hazardous fumes may collect.

Static Discharge Reels

Description	Cable Length ft. (m)	Cable Type	Weight lbs. (kg)	Catalog Number
Static discharge reel	50 (15.2)	Single 3/32" Steel	12 (5.4)	HBL50SD
		Single 3/32" Steel Nylon Coated	13 (5.9)	HBL50SDN
		Dual (Y) 3/32" Steel	13 (5.9)	HBL50YSD

*35 ft. (10.6m) + dual 15 ft. (4.5m) for "Y".

HUBBELL

Wiring Device-Kellems

Count on Hubbell Wiring Device-Kellems for the most reliable and innovative wiring device product line in North America

GET IN TOUCH:



custserv@hubbell.com



(800) 288-6000



www.hubbell.com/wiringdevice-kellems



Hubbell Wiring Device-Kellems
40 Waterview Drive
Shelton, CT 06484

