



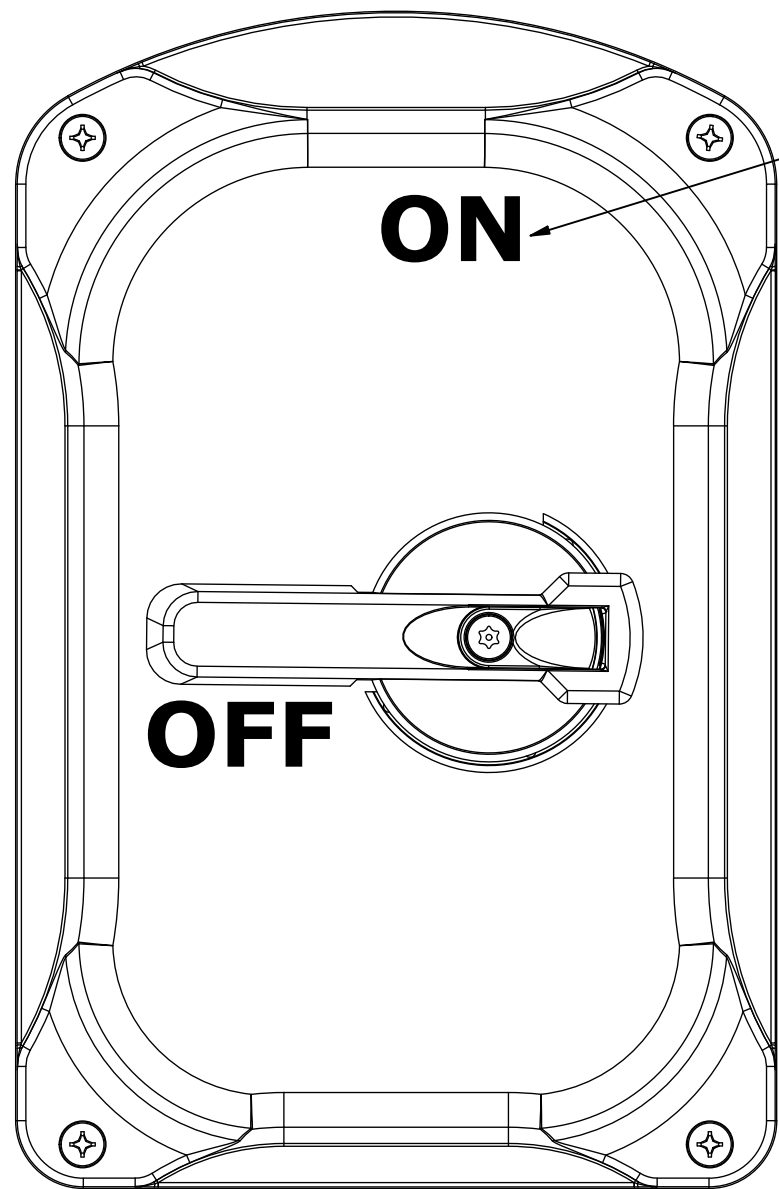


LASER MARKING INFO.
ONTO COVER PRIOR TO
ASSEMBLING COMPONENTS

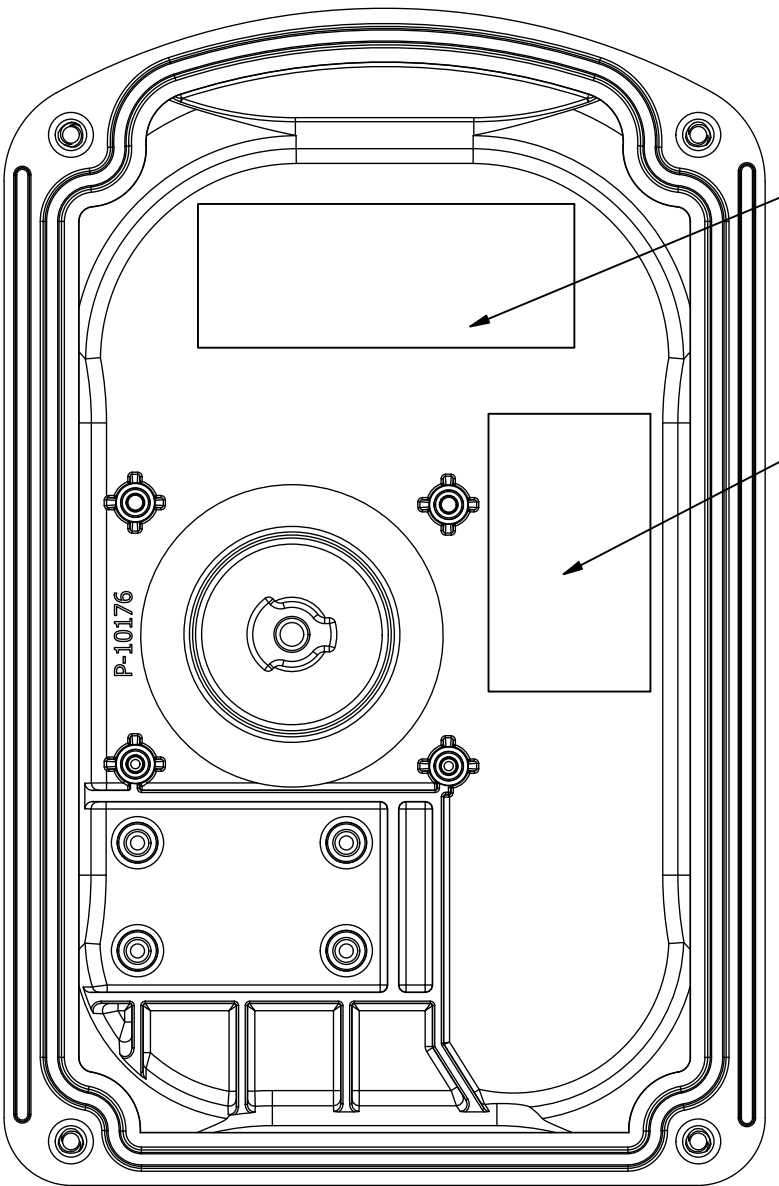

REPLACEMENT COVER
LASER MARKING

LASER MARKING
OF H.P. RATING

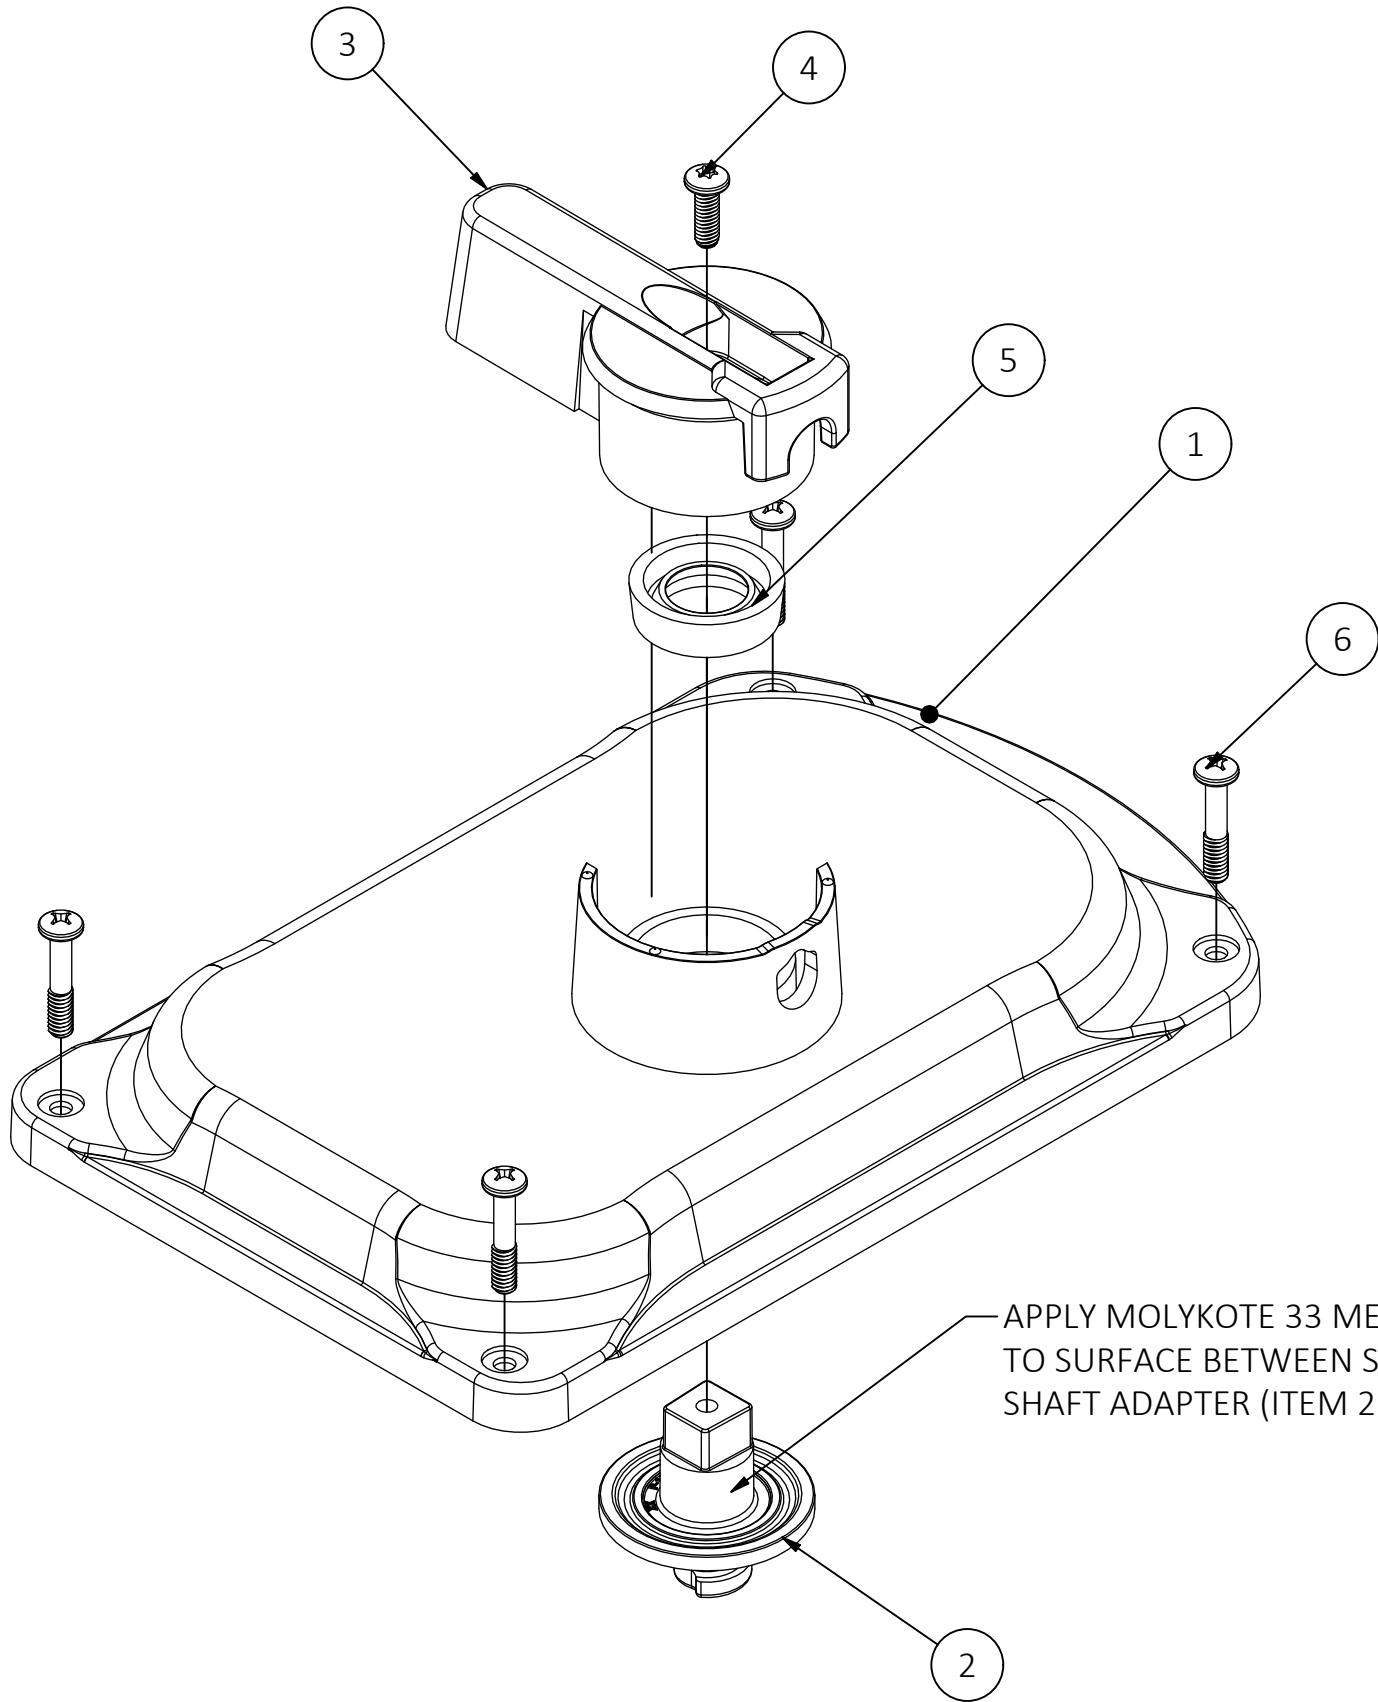

APPLY MOLYKOTE 33 MEDIUM LUBRICANT
TO SURFACE BETWEEN SEAL (ITEM 5)
AND
SHAFT ADAPTER (ITEM 2)

PARTS LIST			
ITEM	QTY	DESCRIPTION	TORQUE
1	1	LASER MARKED COVER	
2	1	SHAFT ADAPTER	
3	1	HANDLE	
4	1	SCREW, #8 X 1/2 LONG TORX HEAD	15 LB.-IN.
5	1	SEAL, SHAFT	
6	4	SCREW, #8 X 7/8 LONG PAN HEAD	18 LB.-IN.

"IN ACCEPTING OUR DRAWINGS OR BLUEPRINTS FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN, AND THAT YOU WILL MAKE NO USE OF OUR DRAWINGS OR BLUEPRINTS OR OF THE IDEAS, INFORMATION OR DESIGNS THEREIN SHOWN WITHOUT OUR PERMISSION."

ISO STANDARD FOR
3rd ANGLE PROJECTION

DO NOT SCALE DRAWING. USE DIMENSIONS ONLY.
DIMENSIONS ARE IN INCHES
UNLESS OTHERWISE SPECIFIED.

SUB.	REVISIONS
1	08/06/23 NEW RELEASE PER DCN 230711031802 CAC
2	02/07/24 REVISED COVER GEOMETRY. ADDED TORQUE VALUE FOR ITEM #6. CHANGED TORQUE VALUE ITEM #4 FROM 12-15 LB-IN. TO 15 LB-IN. PER DCN 240326038044 CAC

MATERIAL		N/A
FINISH		N/A
TITLE		30A REPLACEMENT COVER ASSEMBLY INSTRUCTIONS
WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT		
TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 .XXXX = ± .0025 ANGLE TOL. ±1°	DR. BY CAC CHK. BY CAC	SCALE 3/4 DATE 08/06/23
DR. NO.		PROJECT NO. NPD-03717
SIZE		M-14713
SIZE C	SHEET 1	OF 1