

Straight Blade Devices, Receptacles, Flush Receptacle, Industrial Grade, 2-Pole 3-Wire Grounding, 30A 125V, 5-30R, Orange, Single Pack

By Hubbell Wiring Device-Kellems
Catalog # [IG9308](#)

Straight Blade Devices, Receptacles, Flush Receptacle, Industrial Grade , 2-Pole 3-Wire Grounding, 30A 125V, 5-30R, Orange, Single Pack

Features

- Sequenced contacts assure protection
- Catalog number, ratings and certifications molded in face
- One piece design power and ground contacts

Application

Extra Heavy Duty

Performance

Electrical - Current Interrupting - Certified for current interrupting at full rated current, Electrical - Dielectric Voltage - Withstands 2,000V minimum, Environmental - Flammability - UL 94 V-O, Environmental - IP Suitability - IP20, Environmental - Operating Temperatures - Maximum continuous 75°C minimum -40°C (w/o impact), Mechanical - Product Identification - Ratings are a permanent part of the device, Mechanical - Terminal Accommodation - #12 AWG through #4 AWG copper wire only, Mechanical - Terminal Identification - Terminals identified in accordance with UL 498 and CSA

Specifications


Environmental Conditions	Indoor Dry Unless Protected By Additional Means
EU RoHS Indicator	Yes
Nema Rating	5-30R
Industry Standard(s)	• CSA Certified • NEMA® WD-6 Compliant • UL Listed File E2186 • WR Rating

Conductor

Number Of Wires	3-Wire
Wire Size	#12 AWG to #4 AWG
Number Of Poles	2-Pole

Current

Amperage Rating	30 A
Voltage Rating Description	125 V
Dielectric Strength	Withstands 2,000V minimum
Current Rating	30 A
Voltage Rating	125 V

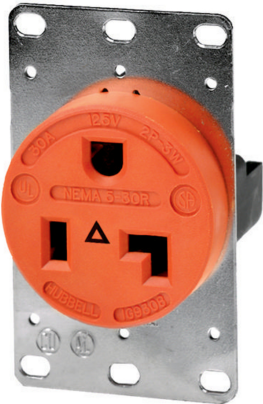

Wattage	3750 W
Connectivity	Back and Side Wired Screw Terminals
Phase	Single Phase
Current / Amperage Rating	30 A

Dimensions

Length	3.68 in
Display Size	Standard Sized Product
Weight	0.45 lb.
Height	2.23 in
Width	2.25 in
Dimensions	3.68 in x 2.25 in x 2.23 in

General

Color	Orange
Style	Finder Groove Face
Series	Straight Blade
Specifications	• Box Terminals - Copper • Contacts - Brass • Ground Shunt - Brass • Housing - Reinforced Thermoplastic Polyester • Mounting Plate - .062 in. (1.5) Pre-Plated Steel
UPC	783585880709
Type	Single Receptacle
Material - Mounting Hardware	Screw Mounting
Item Type	Single
Material	Thermoplastic/Composite

Logistics

Carton Quantity	10
-----------------	----

Operational

Operating Temperature	Maximum continuous 75°C and minimum -40°C without Impact
Horsepower - Maximum	2

Product Assets

- Catalog [English]
 - Catalog Page [English]
 - Catalog Page [English]
 - Installation Manual [English]
-

