

M-14884

1



AMPERAGE RATING

WEATHER-RESISTANT DESIGNATION

#6-32 THRU WALL PLATE MOUNTING HOLE (2X)

GALVANIZED ZINC PLATE TYP

LISTING MARKINGS SEE NOTE 1 & 2

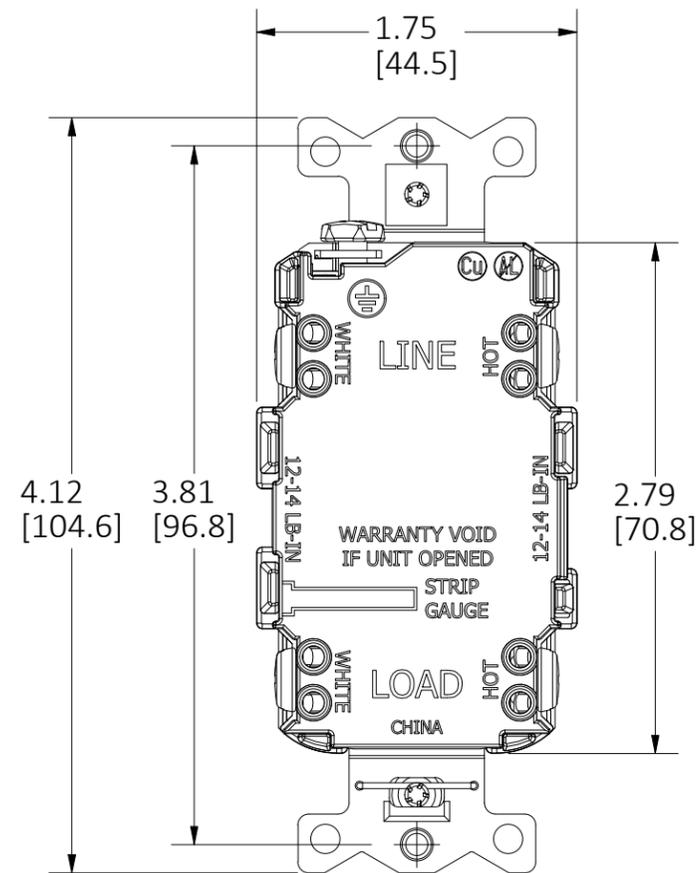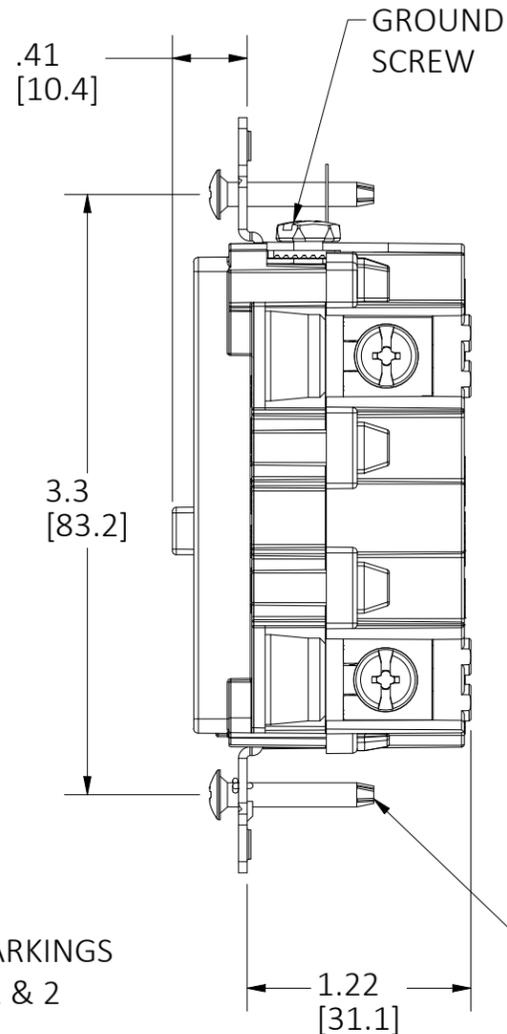

GFBF20 SHOWN

BLANKFACE GFCI RECEPTACLE 125VAC		
CATALOG NO.	DESCRIPTION	AMP RATING
GFBF20XX	COMMERCIAL, WR	20A

NOTES:


- cULus LISTED - APPROVED IN US AND CANADA
- MEETS UL498, UL943, CSA C22.2 No.111, & NEMA WD-6

TABLE 1: SUFFIX

COVER COLOR	-XX
BROWN	--
IVORY	I
GRAY	GY
WHITE	W
RED	R
BLACK	BK
LIGHT ALMOND	LA

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSINGS	NYLON	---
BUTTONS	NYLON	---
BRIDGE	STEEL	NICKEL OR ZINC
SCREWS	STEEL	---
TERMINALS	BRONZE	---
SPRINGS	STEEL	---

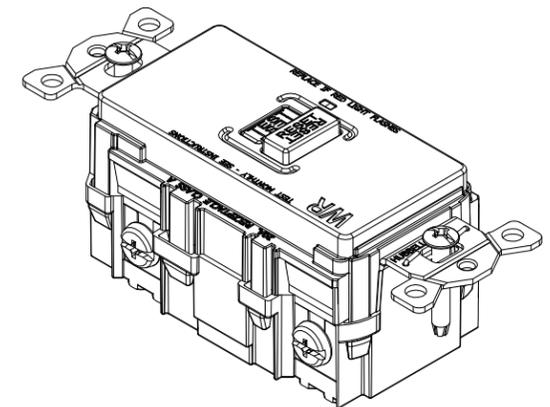

ISO VIEW SCALE 3:4

1	RELEASE TO PRODUCTION PER EC250314046758 BP		3/21/25
REV	DESCRIPTION	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE IN INCHES [mm].

TITLE CUSTOMER DRAWING
20A BLANKFACE
GFCI RECEPTACLE



WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

TOLERANCES UNLESS OTHERWISE SPECIFIED .XX = ± .01 .XXX = ± .005 ANGLE TOL. ±2'	DR. BY BP	SCALE 1:1
	CHK. BY	DATE 1/28/25

DIMENSION SHEET FOR CAT. NO. SEE TABLE

B

M-14884

1