



MISCELLANEOUS

Lay-in Grounding Lugs

Features

- Each lug takes a range of cable sizes
- Heavy duty slotted or hex head screw
- Aluminum lay-in lugs are suitable for use with copper or aluminum conductors
- Copper lay-in lugs are suitable for use with copper or aluminum conductors

Standard Materials

Aluminum or Copper


Standard Finish

Aluminum lug - Zinc plated

Copper lug - Natural


Applicable Third Party Standards

- UL Standard: 467
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E212551

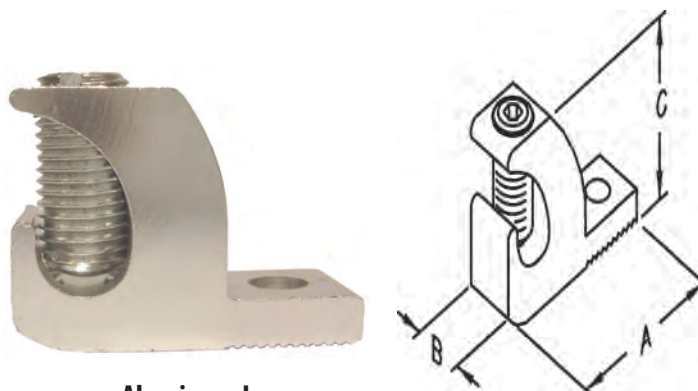

Aluminum Lugs

4/14AL and 1/0 - 8AL
furnished with slotted
screw. 3/0- 6AL and
250MCM- 6AL
furnished with hex
head screw

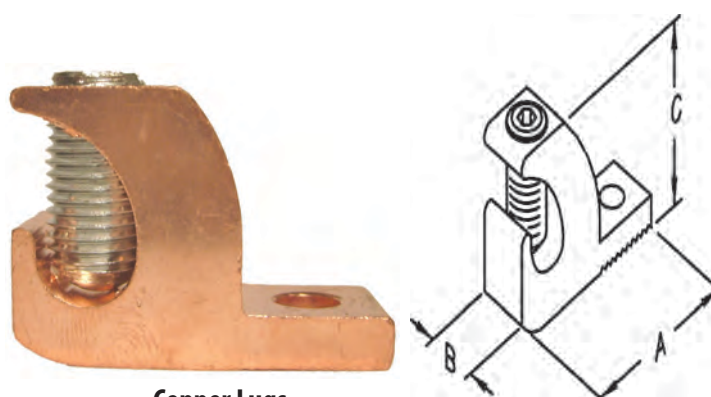

Copper Lugs

4/14CL and 1/0 - 8CL
furnished with slotted
screw. 3/0- 6CL and
250MCM- 6CL
furnished with hex
head screw

CATALOG NUMBER	LUG SIZE	DIM A	DIM B	DIM C	MASTER PACK	WEIGHT PER C
Aluminum Lugs						
4/14ALKON	4-14	1.063	0.375	0.75	100	1.9
1/0-8ALKON	1/0-8	1.5	0.625	1.125	100	6.6
3/0-6ALKON	3/0-6	2	0.813	1.5	50	16.4
250MCM-6ALKON^	250MCM-6	2.188	0.813	1.688	50	18.8
Copper Lugs						
4/14CLKON	4-14	1.063	0.375	0.75	100	4.4
1/0-8CLKON	1/0-8	1.5	0.625	1.125	100	15.9
3/0-6CLKON	3/0-6	2	0.813	1.5	50	40.0
250MCM-6CLKON^	250MCM-6	2.188	0.813	1.688	50	50.3

^ Not UL Certified

