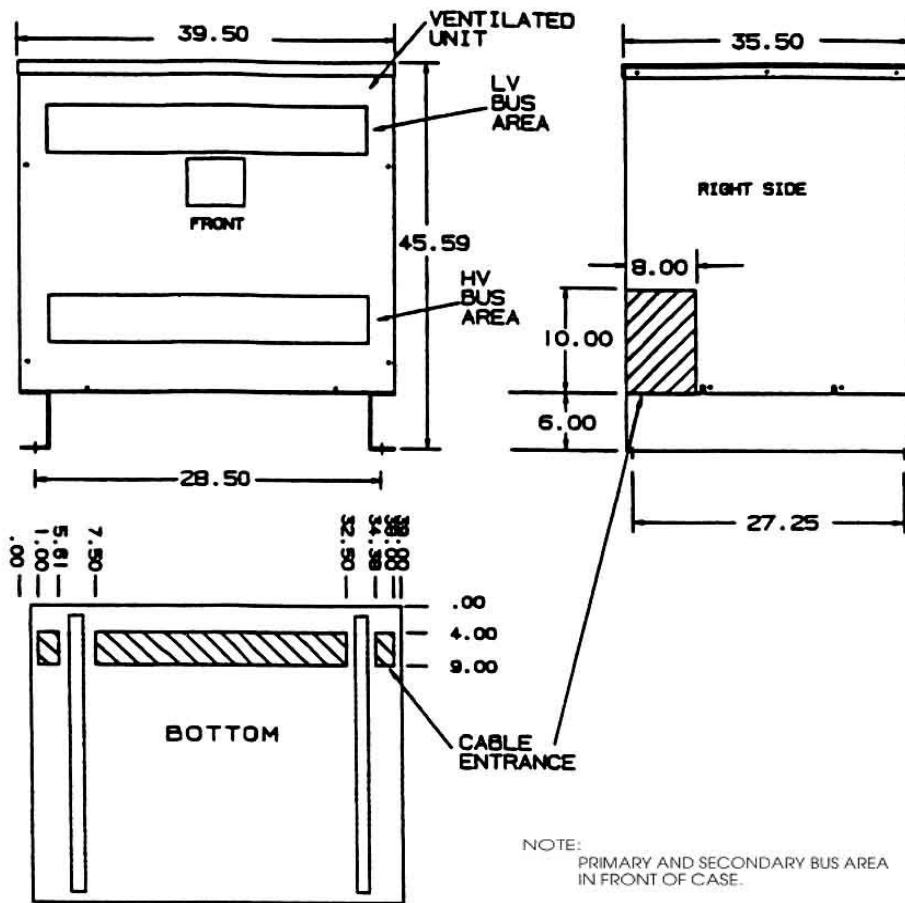


Primary Volts	%	Connect Leads to Tap No.
604	105	1
589	102.5	2
575	100	3
561	97.5	4
546	95	5

Secondary Volts		
460		X1, X2, X3
266 1 phase		X1 & X0 X2 & X0 X3 & X0

Revisions

ACME  ELECTRIC

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
275	DTHB-00275-4S	575Δ	460Y/266	WS-A-5	1565 Lbs	3φ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	55 dB

Windings	AL
Standards:	UL/CSA

Impedance	5.53%

Typical Efficiency	
No Load Losses	
Full Load Losses	

Type No.

DRAWN

CHK.

MAT'L

APP.

FINISH

SCALE

SHEET

A

PRINTS
TO

CONTROL
7

A