
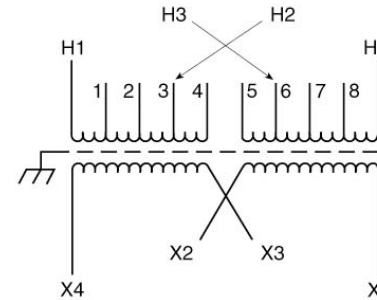


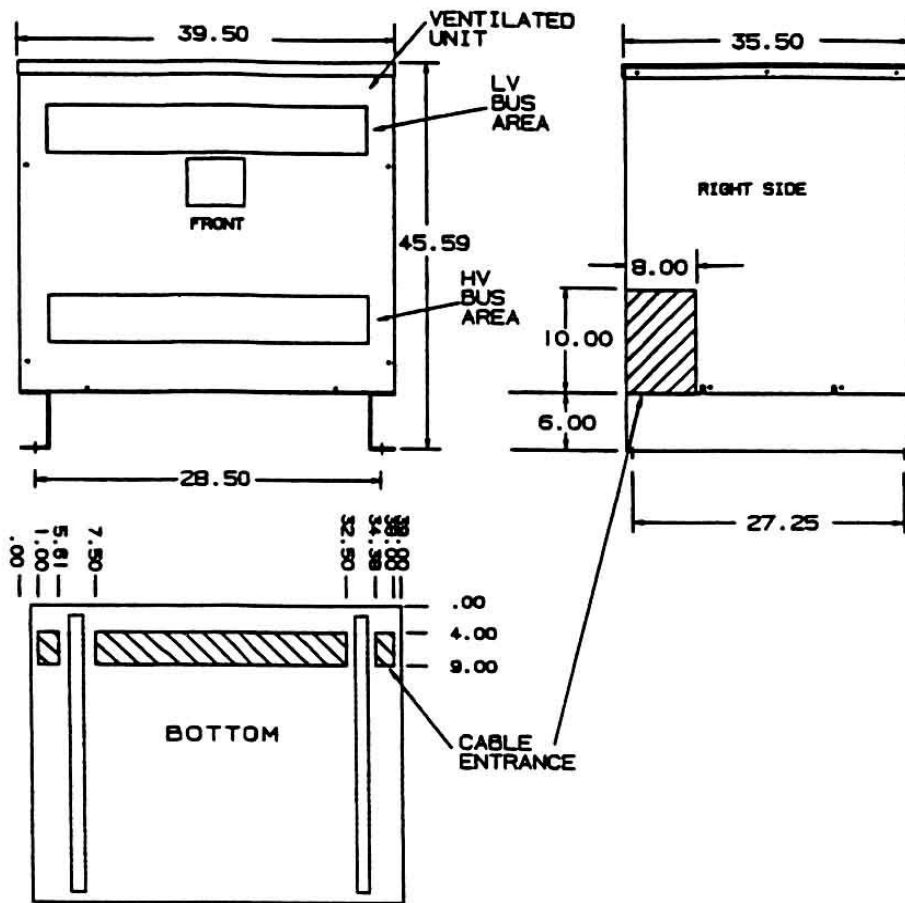

Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
216	H1-H4	H1, H3, 8 & H2, H4, 1	
228	H1-H4	H1, H3, 7 & H2, H4, 2	
240	H1-H4	H1, H3, 6 & H2, H4, 3	
252	H1-H4	H1, H3, 5 & H2, H4, 4	
432	H1-H4	H2, 1 & H3, 8	
444	H1-H4	H2, 2 & H3, 8	
456	H1-H4	H2, 2 & H3, 7	
468	H1-H4	H2, 3 & H3, 7	
480	H1-H4	H2, 3 & H3, 6	
492	H1-H4	H2, 4 & H3, 6	
504	H1-H4	H2, 4 & H3, 5	
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

Revisions

ACME ELECTRIC

Type No.

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
167	TP-53023-3S	240 x 480	120/240	WS-A-5	1055Lbs	1 ϕ	60 Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C	TYPICAL PERFORMANCE DATA				Typical Efficiency	98.81%
Insulation	220°C	Regulation @ 100% PF	2.77%	Windings:	AL	No Load Losses	344W
Sound Level	55 dB	Standards	TP-1	Impedance:		Full Load Losses	4,619W

Meets TP-2002 Efficiency

A

PRINTS TO

CONTROL
7

A