



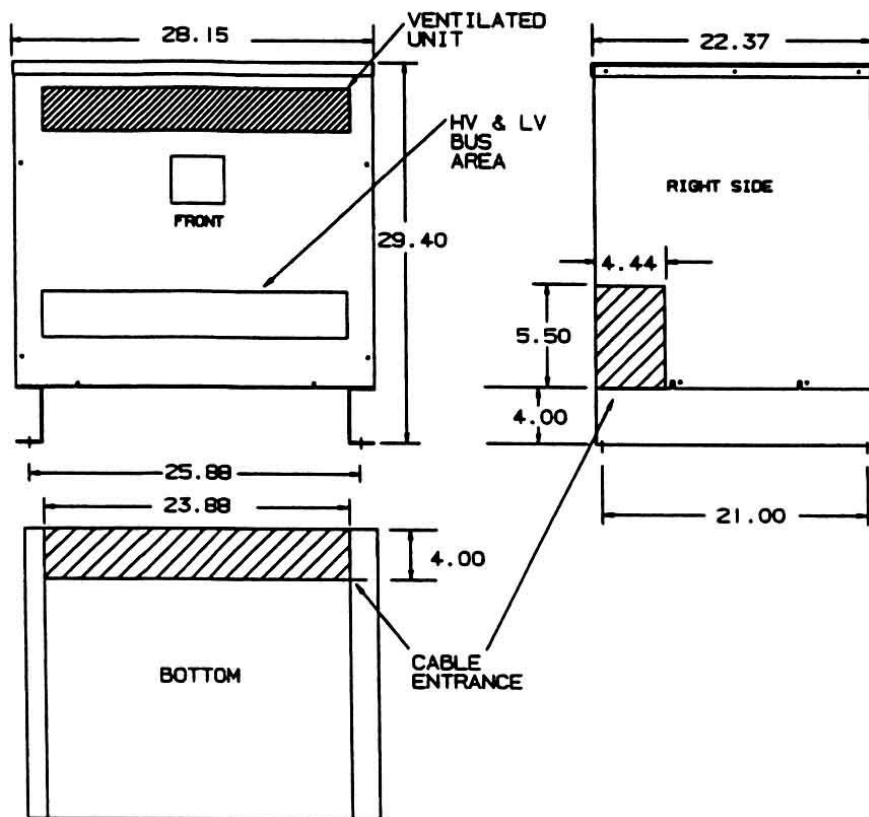

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

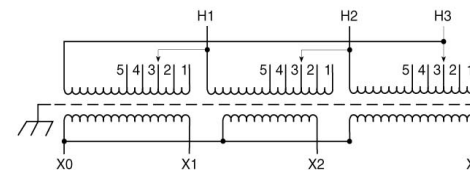

Primary Volts	%	Connect Leads to Tap No.
604	105	1
589	102.5	2
575	100	3
561	97.5	4
546	95	5

Secondary Volts		
460		X1, X2, X3
266		X1 & X0 X2 & X0 X3 & X0
1 phase		

Revisions

ACME ELECTRIC

Type No.

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	DTHB-075-4S	575Δ	460Y/266	WS-A-2	570 lbs	3φ	60Hz

TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Regulation @ 100% PF	3.24%
Standards:	UL/CSA

Impedance	5.10%

Typical Efficiency	96.4%
No Load Losses	429 w
Full Load Losses	2793 w

					A	PRINTS TO	CONTROL 7	A
--	--	--	--	--	----------	-----------	------------------	----------