

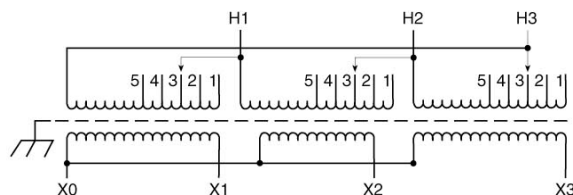
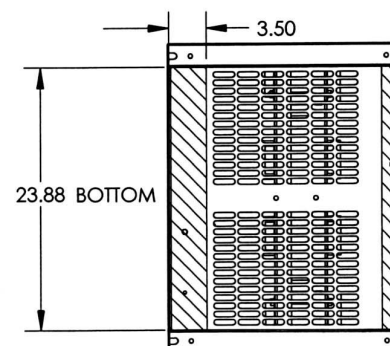


# Revisions

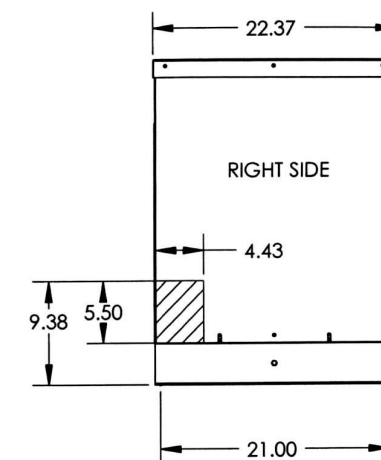

| Primary Volts          | %     | Connect Leads to Tap No.      |
|------------------------|-------|-------------------------------|
| 483                    | 105   | 1                             |
| 472                    | 102.5 | 2                             |
| 460                    | 100   | 3                             |
| 449                    | 97.5  | 4                             |
| 437                    | 95    | 5                             |
| <b>Secondary Volts</b> |       |                               |
| 230                    |       | X1, X2, X3                    |
| 133<br>1 phase         |       | X1 & X0<br>X2 & X0<br>X3 & X0 |

NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

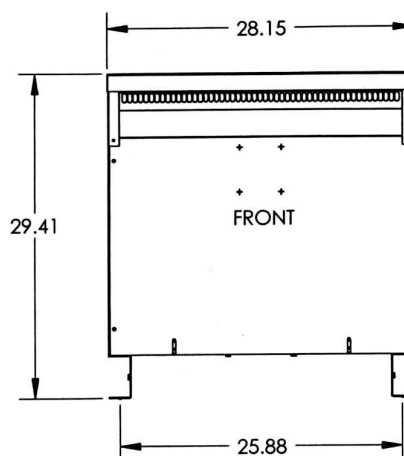

KEY: DENOTES CONDUIT AREAS

| KVA | CATALOG NUMBER     | VOLTAGE |          | WEATHER SHIELD | WEIGHT  | PHASE | FREQ. |
|-----|--------------------|---------|----------|----------------|---------|-------|-------|
|     |                    | HIGH    | LOW      |                |         |       |       |
| 75  | <b>DTGA-075-4S</b> | 460Δ    | 230Y/133 | WS-A-2         | 570 Lbs | 3φ    | 60 Hz |

|               |       |
|---------------|-------|
| Winding Rise: | 150°C |
| Insulation:   | 220°C |
| Sound Level:  | 50db  |

## TYPICAL PERFORMANCE DATA

|                       |        |
|-----------------------|--------|
| Regulation @ 100% PF: |        |
| Standards:            | UL/CSA |

|            |    |
|------------|----|
| Windings:  | AL |
| Impedance: |    |

|                     |  |
|---------------------|--|
| Typical Efficiency: |  |
| No Load Losses:     |  |
| Full Load Losses:   |  |

Type No.

DRAWN:

DATE: November 26, 2012

**CASE 2**

Control  
7

**A**