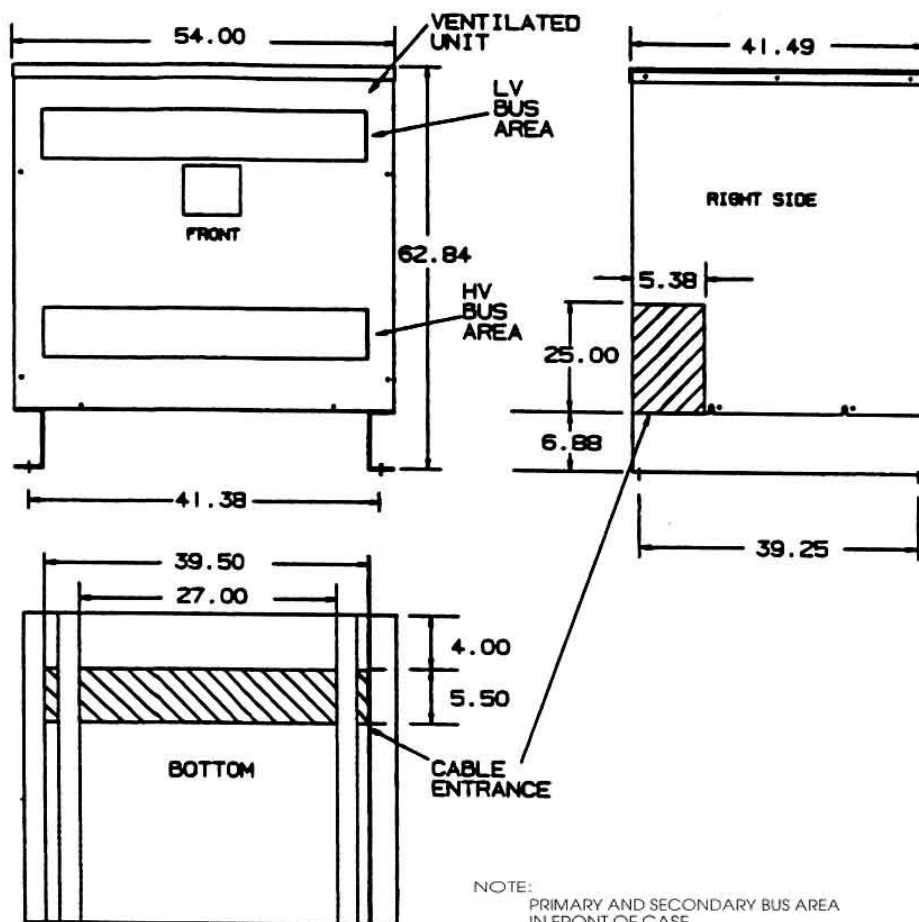


| Primary Volts          | %     | Connect Leads to Tap No. |
|------------------------|-------|--------------------------|
| 483                    | 105   | 1                        |
| 472                    | 102.5 | 2                        |
| 460                    | 100   | 3                        |
| 449                    | 97.5  | 4                        |
| 437                    | 95    | 5                        |
| <b>Secondary Volts</b> |       |                          |
| 460                    |       | X1, X2, X3               |
| 266                    |       | X1 & X0                  |
| 1 phase                |       | X2 & X0                  |
|                        |       | X3 & X0                  |

## Revisions

ACME  ELECTRIC

Type No.

DRAWN:

DATE: November 26, 2012

**CASE 6**

| KVA | CATALOG NUMBER | VOLTAGE |          | WEATHER SHIELD | WEIGHT   | PHASE | FREQ. |
|-----|----------------|---------|----------|----------------|----------|-------|-------|
|     |                | HIGH    | LOW      |                |          |       |       |
| 660 | DTGB-0660-4S   | 460Δ    | 460Y/266 | WS-A-6         | 3700 Lbs | 3φ    | 60 Hz |

|               |       |
|---------------|-------|
| Winding Rise: | 150°C |
| Insulation:   | 220°C |
| Sound Level:  | 65db  |

### TYPICAL PERFORMANCE DATA

|                       |        |
|-----------------------|--------|
| Regulation @ 100% PF: | 2.02%  |
| Standards:            | UL/CSA |

|            |       |
|------------|-------|
| Windings:  | AL    |
| Impedance: | 6.83% |

|                    |          |
|--------------------|----------|
| Typical Effic @35% | 98.84%   |
| No Load Losses:    | 1,611 W  |
| Full Load Losses:  | 13,576 W |

Control  
7

A