

Cam-Lok™ J Series Connectors are specifically designed to meet the needs of demanding portable applications. J Series Plugs and Receptacles are the proven industry standard single pole connectors for reliability and service with added safety.


Applications:

- J Series Plugs and Receptacles are specifically designed for industrial power distribution applications requiring quick, tool-free connections
- Ideal for portable power, power distribution, motors, generators, and entertainment applications
- J Series replaces traditional hard wiring while cutting downtime and maintenance
- J Series Connectors are insulated, shatter/crack-resistant and watertight, plus heat-, weather-, ozone-, oil-, and abrasion-resistant

Certifications and Compliances:

- Listed to UL498, File No. E67181
- CSA certified to C22.2 No. 182.3 LR13963

Features:

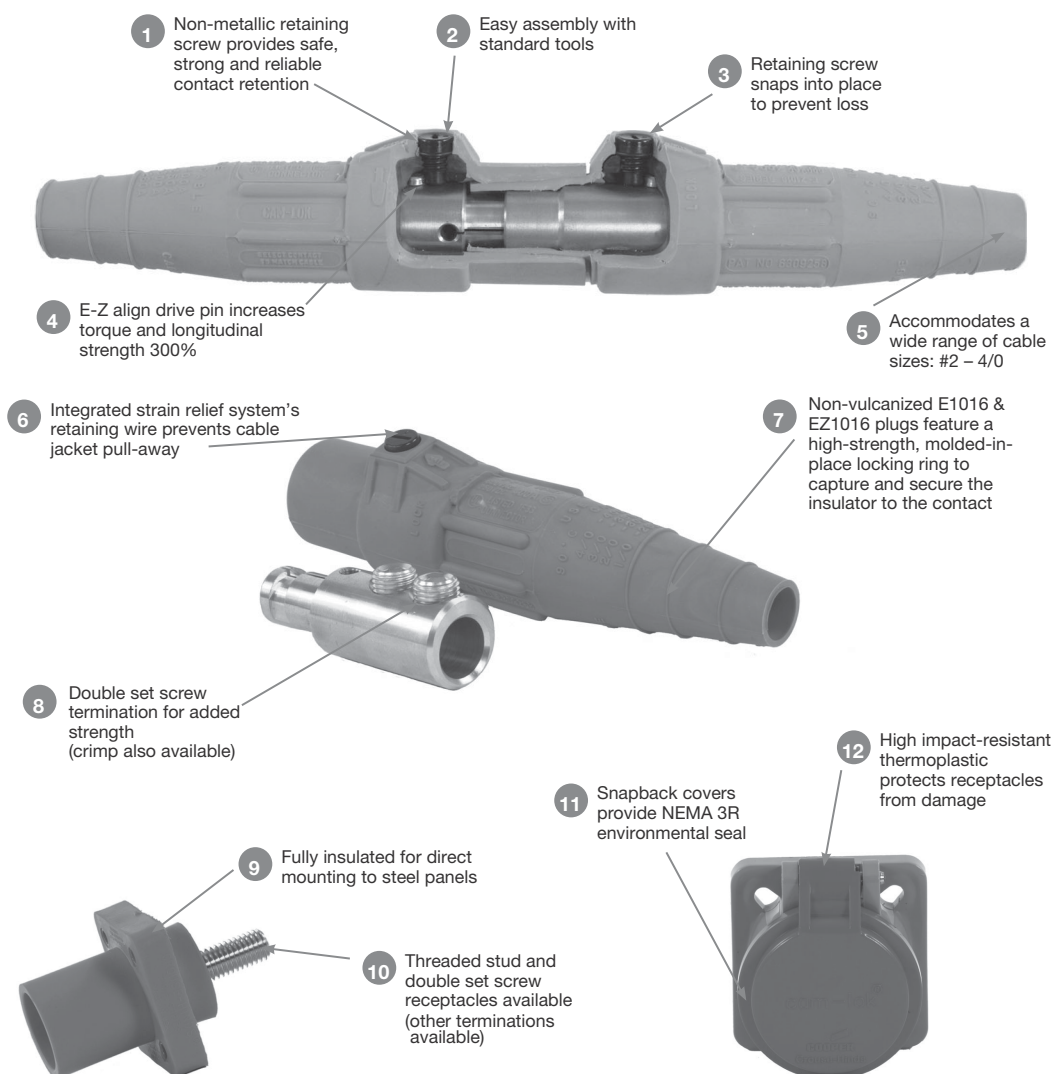

Cam-Lok™ J Series E1015 Accessories

NEMA 3R

11P

**Cable Size #8 - #4 AWG 600V AC/DC
Up to 150A Continuous**

J Series E1015, Rubber Features:

- Double cam principle provides a positive, vibration-proof connection
- Self-compensating for wear
- No moving contact surfaces, eliminating arcing or burning
- Superior electro-mechanical connections
- Locked contacts will withstand a pulling force of 1,000 lbs.
- 1/3 of a turn assures a high pressure contact approaching 600 lbs. per sq. in., providing minimum resistance
- Contacts carefully machined from a high conductivity brass to a smooth sliding fit, even before to locking
- Watertight neoprene insulators molded from colorfast material, color-coded for easy phase identification
- Recessed contacts protected by insulating jacket that extends beyond contact ends for safety

Testing and Code Compliance:

- Listed to UL498, File No. E67181
- CSA certified to C22.2 No. 182.3-M1987, File No. LR13963

Material Characteristics:

- Body - rubber
- Environmental rating: NEMA 3R
- Temperature rating: -40°C to 105°C

Ordering Information - Three Way "T" Connectors:

Color	Paralleling "T" Complete Cat. # M-M-F	Tapping "T" Complete Cat. # M-F-F
Black	E1015-2324	E1015-2312
Red	E1015-2326	E1015-2314
Green	E1015-2328	E1015-2316
White	E1015-2329	E1015-2317
Blue	E1015-2348	E1015-2350
Brown	E1015-2342	E1015-2370
Orange	E1015-2327	E1015-2315
Yellow	E1015-2325	E1015-2313




E1015-2314

Ordering Information - Adapters:

Double Female Complete Cat. #	Double Male Complete Cat. #	Male/Female Complete Cat. #	Double Female Complete Cat. #	Double Male Complete Cat. #	Male/Female Complete Cat. #
E1015-2352	E1015-2362	E1015-2336	E1015-2358	E1015-2368	E1015-2361
E1015-2354	E1015-2364	E1015-2338	E1015-2359	E1015-2369	E1015-2371
E1015-2356	E1015-2366	E1015-2340	E1015-2355	E1015-2365	E1015-2339
E1015-2357	E1015-2367	E1015-2341	E1015-2353	E1015-2363	E1015-2337

Ordering Information - Protective Caps:


Color	Male Cat. #	Female Cat. #
Black	A100793-1	A100792-1
Red	A100793-3	A100792-3
Green	A100793-5	A100792-5
White	A100793-6	A100792-6
Blue	A100793-7	A100792-13
Brown	A100793-8	A100792-7
Orange	A100793-4	A100792-4
Yellow	A100793-2	A100792-2



A100792-1

To order single packaged products, add a "K" suffix to the complete catalog number.

Dimensions:

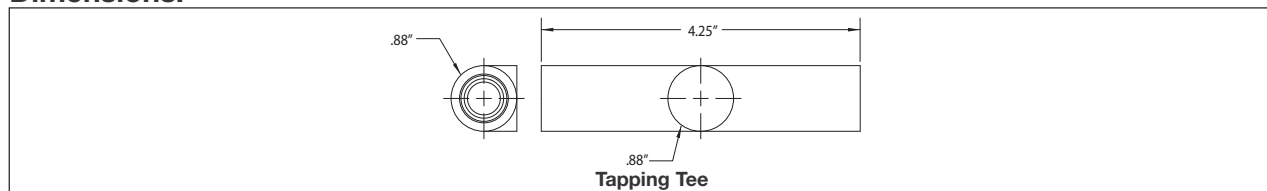

Crouse-Hinds
by **E.T.N**