


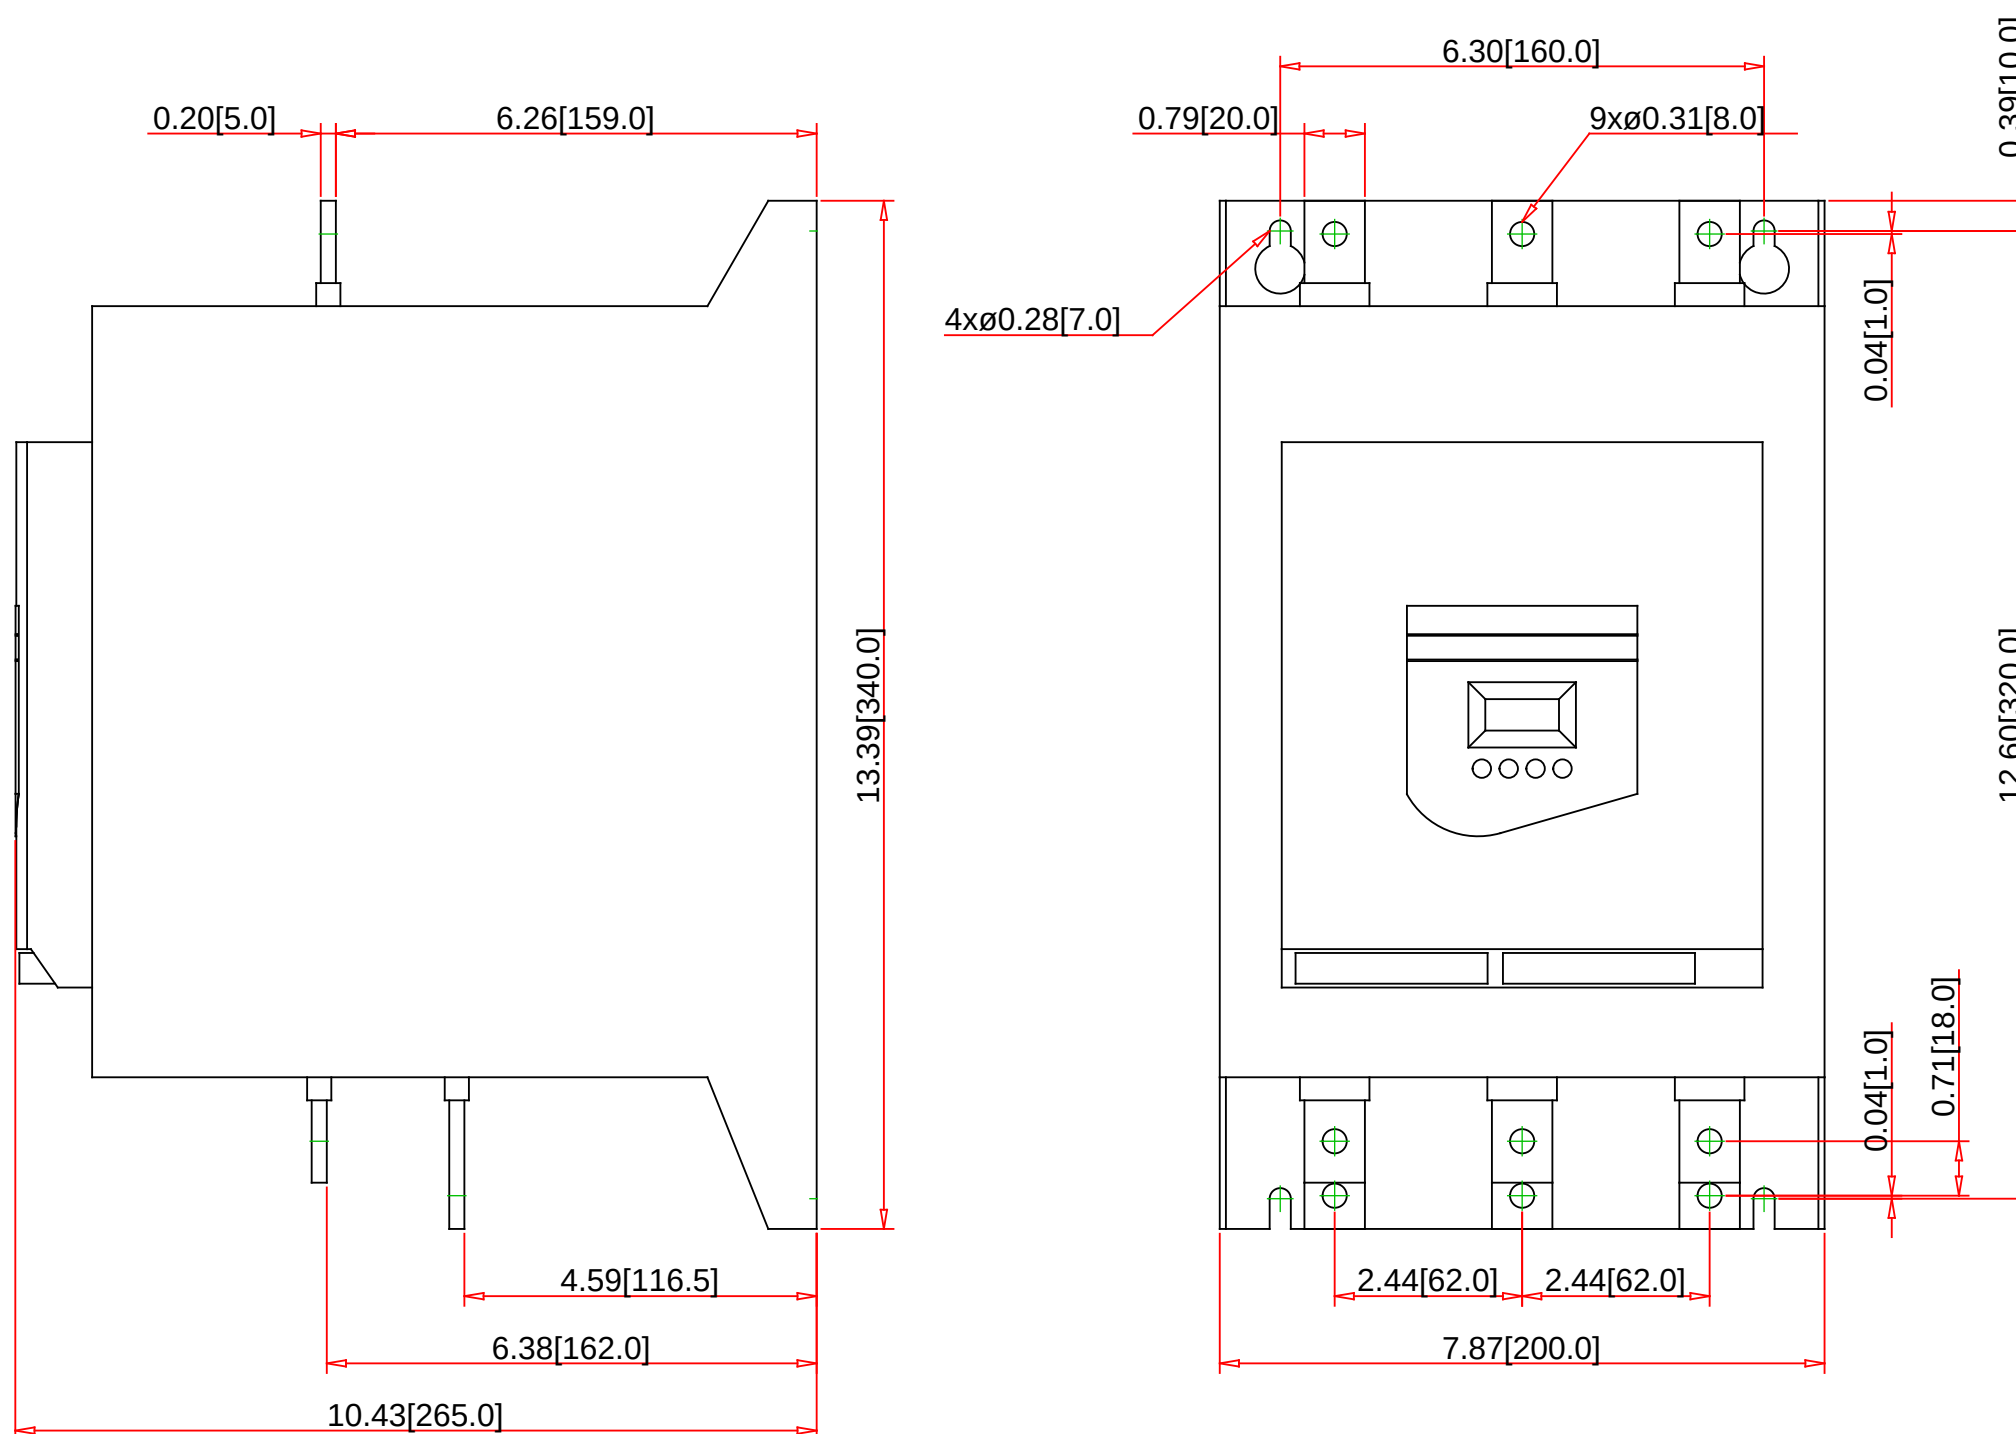

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]
- Inch Dimensions are derived from the metric.

Part No.:

ATS48C17Y

Schneider
Electric

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Control Voltage: 24v
Logic Input: 4
Analog Input: 1 PTC probe
Analog Output: 1
Logic/Relay Output: 3
Communication: Modbus
Weight [lb]/[kg]: 27.3/12.4
UL File No.: E184727
CSA File: 164581
Other: IEC/EN 60947-4-2, EMC classes A & B, CE,DNV,C-Tick,GOST, CCC,NOM,SERPRO AND TCF

Specification:

Description: Soft Start
Family: Altistart 48
Product Line: Soft Starters
Application: Constant & Variable Torque
Output Ampere Rating: 170A
Max. HP Rating 208V: 50
Max. HP Rating 230V: 60
Max. kW Rating 400V: 90
Max. HP Rating 460V: 125
Max. HP Rating 575V: 150
Enclosure Rating: IP00
Frame Size: C