
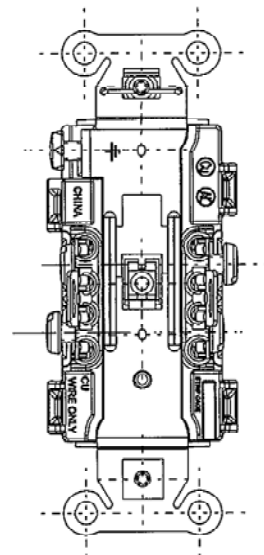
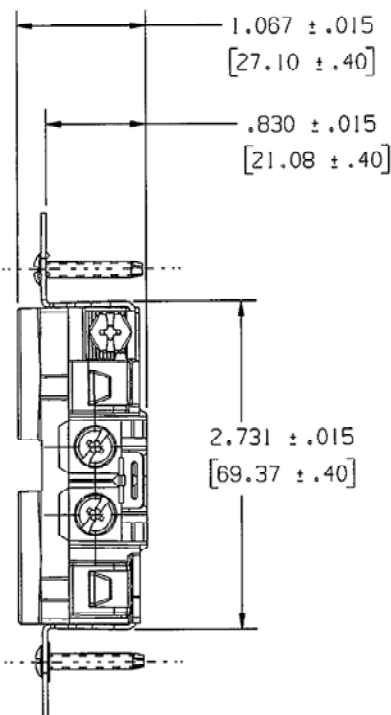


M-10315 3

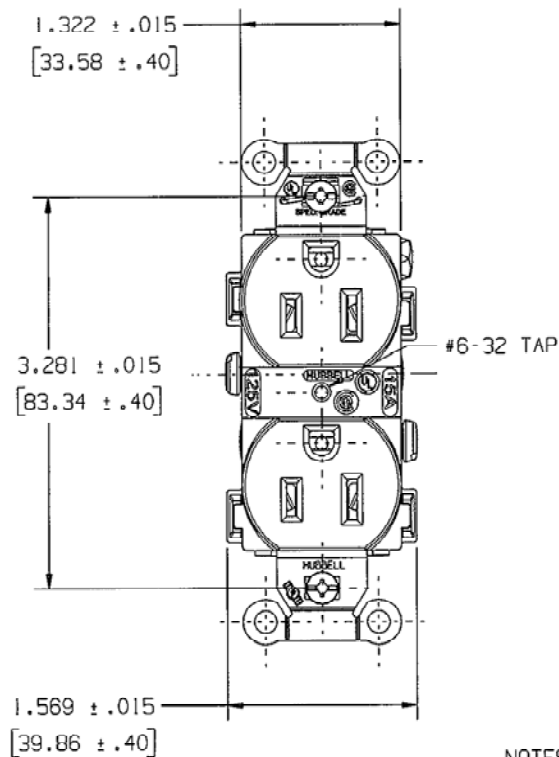

NOTES:

- 1) DIMENSIONS ARE IN INCHES (MM).
- 2) ALL DEVICES UL LISTED, CSA AND FED. SPEC. CERTIFIED.
- 3) TERMINALS ACCOMMODATE #14-#10 AWG COPPER WIRE ONLY.

CATALOG NUMBERS

	BROWN	IVORY	GRAY	WHITE	BLACK	ALMOND	BLUE	LIGHT ALMOND	RED	ORANGE	OFFICE WHITE
HUBBELL	BR15	BR15I	BR15G	BR15W	BR15BLK	BR15AL	BR15BL	BR15LA	BR15R	-----	BR15OW

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
TOP	NYLON 6/6	SPI A-3
BASE	NYLON 6/6	SPI A-3
LINE CONTACTS	BRASS	
GROUND CONTACTS	BRASS	
CONTACT SCREW (NEU)	STEEL	NI PLT
CONTACT SCREW (HOT)	STEEL	
BRIDGE	.04 GALV STL	
GROUND SCREW	STEEL	GREEN
STAPLE	S.S.	
WASHER	PVC FILM	BLACK
MOUNTING SCREW	STEEL	ZINC PLT

3	ADDED CAT. NOS. BR15BL & BR15R TO TABLE. PER DCN 19208 DDL	DJP	11/16/12
2	ADDED CAT. NOS. BR15AL & BR15LA PER DCN# 13864	WVW	08/02/07
1	RELEASED PER DCN# 13786	WVW	03/27/07
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE
PRODUCT SHOWN ON THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT NOTICE

TITLE HUBBELL
15A 125V, 2P 3W,
SMOOTH FACE DUPLEX RECEPT.
BACK & SIDE WIRE

TOLERANCES UNLESS OTHERWISE SPECIFIED

.XX : ± .01
.XXX : ± .005
ANGLES : ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY WVW	APP. BY
TR. BY	SCALE 1:1
CHK. BY	DATE 3/07