
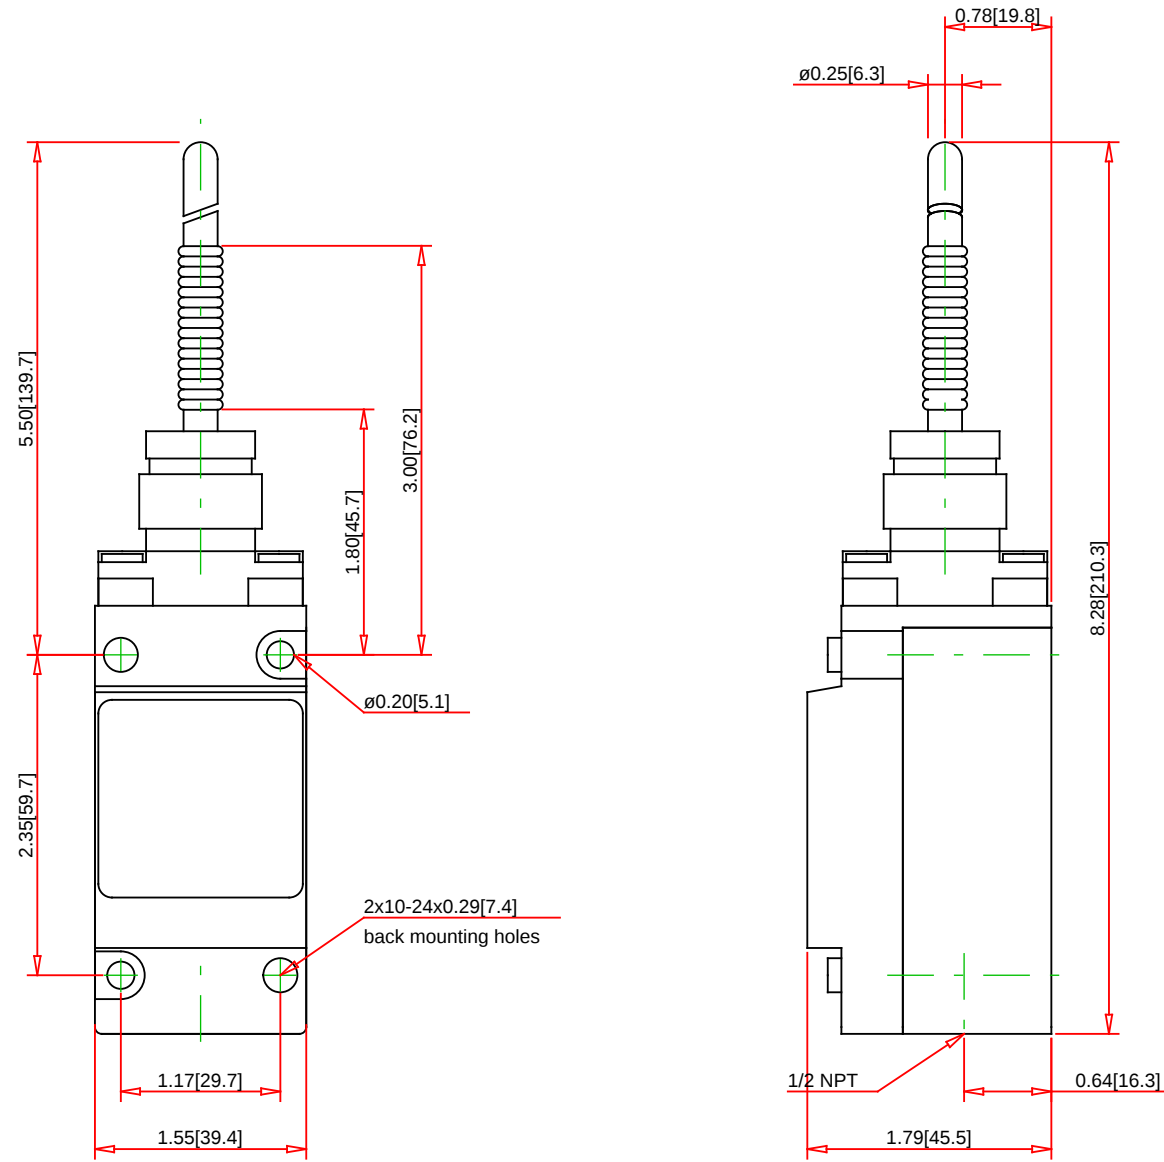




Note: - Drawings Not To Scale - Drawings Subject to Change Without Notice - Dimensions are inches next to [Millimeters]	Part No.: 9007C54JS9	 Telemecanique Sensors 1875 Founders Drive Dayton, OH 45420-4017 Customer Care Center : 1-800-435-2121 Web : www.tesensors.com
--	---	---

Technical Information:		Specification:	
Terminal Type: Enclosure Rating: Approvals: Weight: Conforming to Standards: RoHS: Operating Temperature Range: Shock Resistance: Vibration Resistance: Max. Actuation Speed : Repeat Accuracy: Operating Torque/Force: Cable Length:	Screw Clamp NEMA 1/2/4/6/6P/12/13 UL# E42259 CCN NKCR - CSA # LR25490 Class 3211-03 - CE Marked 1.25 lb NEMA and UL type 6P, NOM, ANCE No 0 to 185 °F 60 gn (9ms) 25 gn (10-150 Hz, 11 ms) 3 in-Pounds	Description: Body Style/Type Description: Head Type: Lever Arms: Body with Contact Type: Conduit Thread: Ampere Rating Continuous: Maximum Voltage Rating: Actuation: Actuator Action: Lever Arm Length: Roller Dimension: Roller Material: Contact Configuration: Contact Operation: Connection Type: Head Material: Positive Opening:	std plastic wobble stick any dir. spring rtn + 9007T/FT lever shaft hub NEMA Square D 9007 Limit Switches 9007C Heavy Duty SemiModular 39mm Metal Body 9007J plastic wobble stick, any dir. spring return + 9007T/FT lever shaft 1 N.O. / 1 N.C. SPDT Snap Action 0.5 NPT 10A 600V Any Direction Spring Return 1 N.O./1 N.C. Snap Action Conduit Entrance (0.5 Inch NPT) Zinc Alloy No