
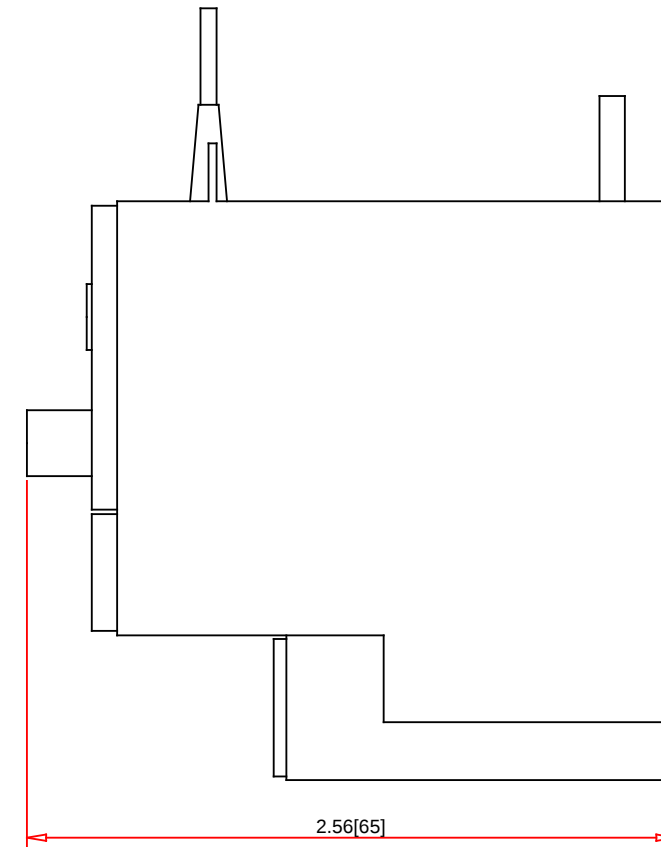


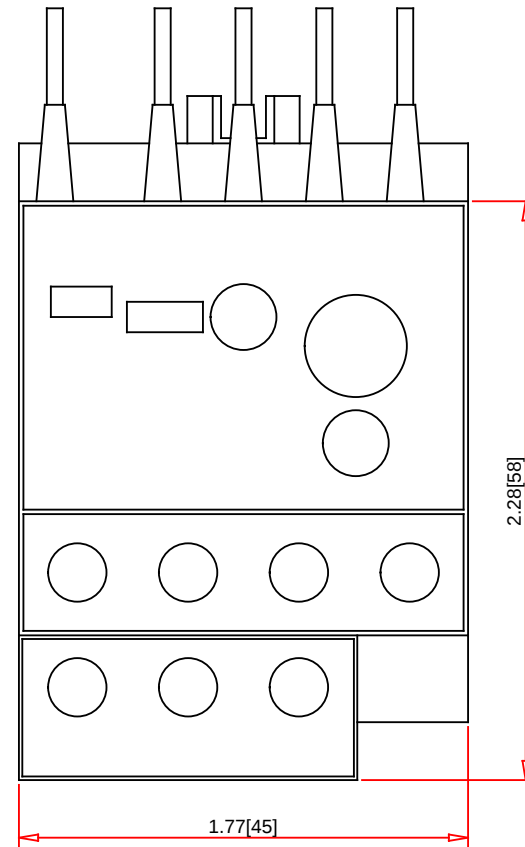


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

LR2K0303

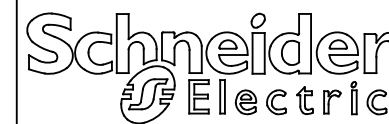

Schneider Electric United States  
North American Division  
Boston One Campus  
800 Federal Street  
Andover, MA 01810, USA  
Phone: +1 877 342 5173  
Email: CCC@us.schneider-electric.com

Technical Information:

Termination Method: Screw Clamp  
UL File/CCN: E164353 / NKCR  
CSA File: LR43364 3211 03  
Meets Standard: IEC 60947  
CE: Yes  
RoHS: Yes  
Weight: 0.35 lb (0.13 kg)  
Power Wire Size : #12 - #18 AWG  
Control Wire Size: #12 - #18 AWG  
Power Terminal Torque: 7 lb-in (0.8 Nm)  
Control Terminal Torque: #12 - #18 AWG  
Mtg. Directly to Contactor: Yes  
Mtg. Separate from Contactor: LA7K0064

Specification:

Description: TeSys K IEC Overload Relay  
Type: TeSys K IEC Bi-Metallic Overload Relay  
Ambient Comp. Bimetallic: Yes  
Solid State: n/a  
Class 10: Yes  
Class 20: n/a  
Single Phase Sensitivity: Yes  
For Use with Contactors: TeSys K AC or DC IEC Contactor  
Current Setting Range: 0.23A to 0.36A