


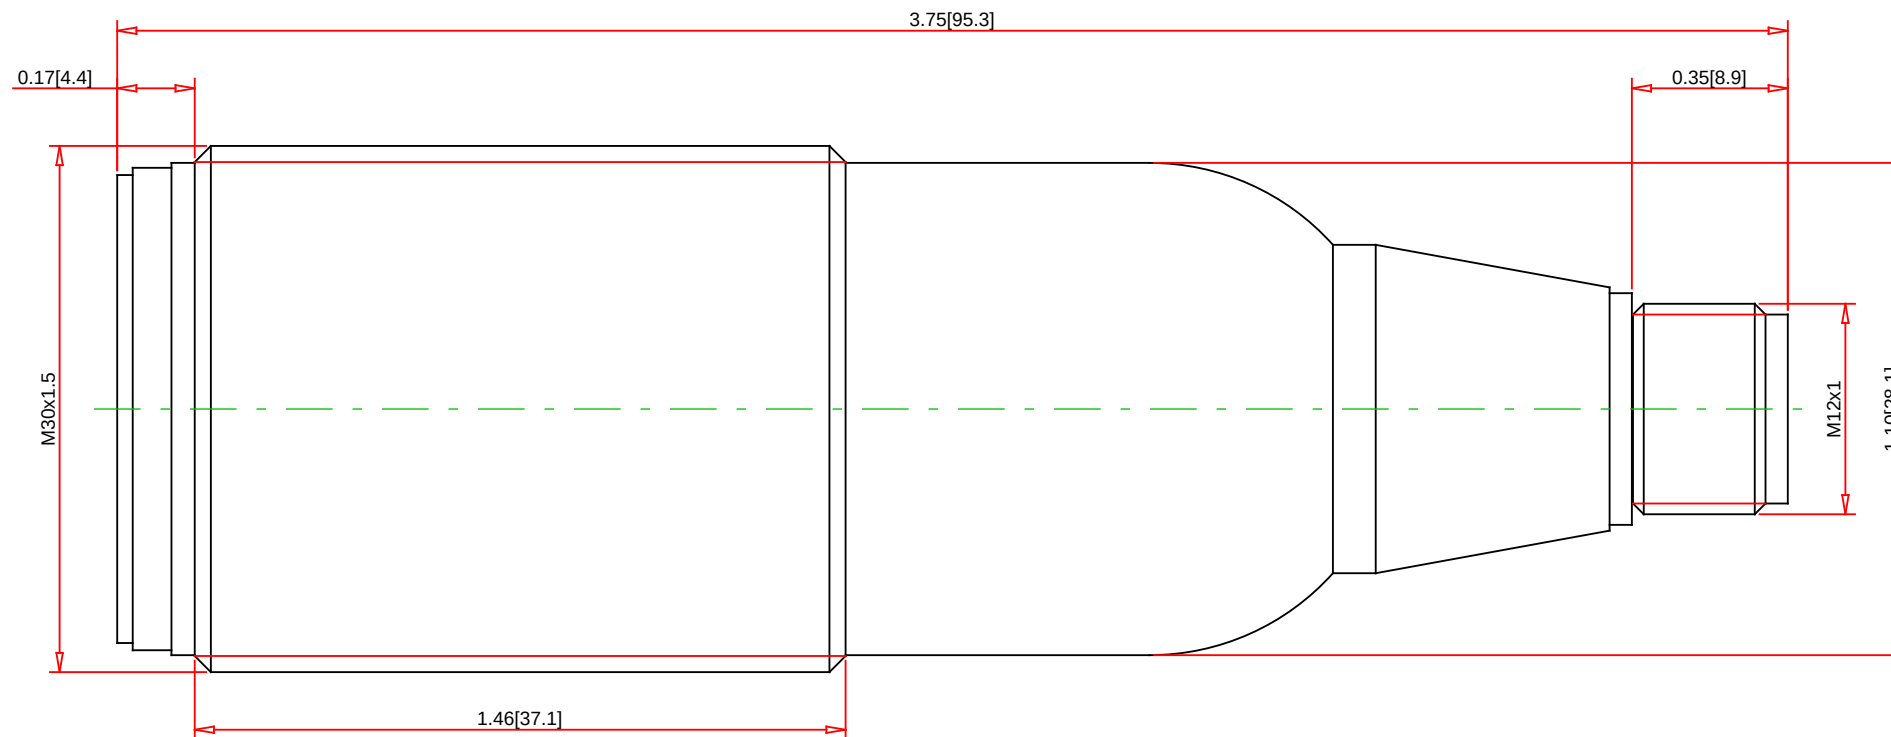

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
XX6V3A1PAM12

 **Telemecanique**
Sensors
Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window:	
Far Limit:	
Sensing Range:	102.0 mm to 1.0 mm (4.0 in to 39.0 in)
Circuit Type:	Normally Open
Output Mode:	PNP
Volts Type:	DC
Voltage Range:	12-24 VDC
Max Load:	50 mA
Current Consumption:	
Sonic Frequency:	180 Hz
Temp Range:	- 40° to 80° C (-40° to 176°F)
NEMA Type:	NEMA 4X (indoor use only)
IP Rating:	IP67
Standards:	UL, CE, CSA, Rohs

Specification:

Sensor Type:	Proximity
Description:	Ultrasonic Sensor, Proximity, Barrel, 12-24 VDC
Body Style:	Barrel
Diameter:	30 mm
Housing Material:	Valox PBT Plastic
Face Material:	Glass Epoxy
Field Configurable:	
Functionality:	
Cable Size:	
Connector Type:	M12
Special Features:	Tamper Proof with PB100 Pushbutton Accessory