


Flexible Braids

These 2-hole jumpers make connections wherever there is severe vibration.

2-Hole NEMA Flexible Jumpers — FBS2H™ Series

- 30 AWG individual wires in braid construction for flexibility with connections
- 99.9% pure copper ferrules on each end provide high conductivity
- Individual wires are tinned prior to weaving to deliver maximum protection from corrosion

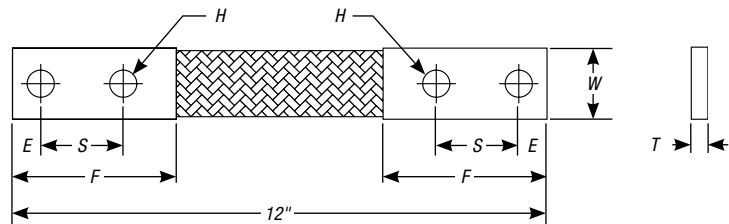

FBS2H™ Series

CAT. NO.	AMPACITY Δ 65° C*	NO. OF BRAIDS IN ASSEMBLY	W IN. (MM)	F IN. (MM)	E IN. (MM)	S IN. (MM)	H IN. (MM)	T IN. (MM)	WEIGHT LB. (KG)
FBS2H040A1	400	1	1½ (38.1)					⅜ (4.7)	.63 (.286)
FBS2H070A1	700	2	1½ (38.1)					¼ (6.4)	.98 (.445)
FBS2H090A1	900	3	1½ (38.1)					1⅛ (8.7)	1.31 (.594)
FBS2H110A1	1100	4	1½ (38.1)	3½ (88.9)	⅝ (15.9)	1¼ (44.4)	⅝ (14.3)	⅜ (9.5)	1.67 (.757)
FBS2H150A1	1500	6	1½ (38.1)					½ (12.7)	2.29 (1.039)
FBS2H170A1	1700	9	1⅞ (39.6)					¾ (19)	3.76 (1.706)
FBS2H200A1	2000	13	1⅞ (39.6)					1 (25.4)	5.26 (2.386)

* Temperature rise test per CEI60694, IEEE/ANSI C37.34-1994.

Note: Standard total lengths are 12". For different lengths, add your desired length to the end of the catalog number (e.g., FBS1H035A1-16 for 16" long).
Ferrules are tinned. For other options, please consult your Thomas & Betts representative.