

CEILING FAN HEATER

ACF SERIES

THE SPACE-SAVER

°STELPRO has the space-saving solution for heating small entryways, hallways and lobbies: the sturdy, reliable ACF ceiling fan heater. Built to last, the ACF pushes heat downward, mixing with the cold air below. It can be surface mounted or recessed into conventional ceilings, or recessed in suspended ceilings. Whether installed in an entryway or hallway, the ACF has all the heat you need in an enclosed space.



NEW GRILLE WITH ROUNDED SIDES

DURABLE AND STYLISH

THE PERFECT SOLUTION FOR ENTRYWAYS AND HALLWAYS

CEILING MOUNTED, PREVENTING VANDALISM

MULTIPLE INSTALLATION OPTIONS

CAN BE SURFACE MOUNTED OR RECESSED - OR RECESSED IN A SUSPENDED CEILING

NEW DISCONNECT SWITCH

OPTIONAL

IDEAL FOR:

ENTRYWAY, HALLWAY, CORRIDOR, OFFICE BUILDING

COLORS

- standard: white, silica white, silver
- luxurious finish: stainless steel (surcharge)
- optional: almond, black, textured charcoal, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- fan: 1 x 160 CFM (single unit) - 2 x 160 CFM (double unit)
- thermal protection with automatic reset

ELEMENT

nichrome element producing instant heat

CONTROL

connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION

- ceiling
- recessed or surface mounted with surface adapter (optional)
- T-Bar adapter (optional)

ACCESSORIES

PRODUCT	DESCRIPTION
WFT1	built-in single pole thermostat [120 V - 600 V]
WFT2	built-in double pole thermostat [120 V - 600 V]
WFS1*	surface adapter (single unit)
WFS2*	surface adapter (double unit)
WFS1SS	stainless steel surface adapter (single unit)
WFS2SS	stainless steel surface adapter (double unit)
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles
CFTBA1*	T-Bar adapter (single unit)
CFTBA2*	T-Bar adapter (double unit)
CFTBA1SS	stainless steel T-Bar adapter (single unit)
CFTBA2SS	stainless steel T-Bar adapter (double unit)
WFC24RX*	relay kit without transformer 24 V

* Add W for white, SW for silica white or S for silver

* Factory installed



ROUNDED SIDES

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL	BUILT-IN THERMOSTAT	240 V CONTROL	24 V CONTROL	POWER		VOLTAGE	PHASE	WEIGHT		MODEL
CODE	CODE	CODE	CODE	WATTS	BTU/H	VOLTS	NB	KG	LB	UNIT
ACF1508	ACF1508T	ACF1508C	ACF1508C24	1500	5120	208	1	9	20	SINGLE
ACF1502	ACF1502T	ACF1502C	ACF1502C24	1500/1125	5120	240/208	1	9	20	SINGLE
ACF1507	ACF1507T	ACF1507C	ACF1507C24	1500	5120	277	1	9	20	SINGLE
---	ACF1505T	ACF1505C	ACF1505C24	1500	5120	480	1	9	20	SINGLE
ACF2008	ACF2008T	ACF2008C	ACF2008C24	2000	6826	208	1	9	20	SINGLE
ACF2002	ACF2002T	ACF2002C	ACF2002C24	2000/1500	6826	240/208	1	9	20	SINGLE
ACF2007	ACF2007T	ACF2007C	ACF2007C24	2000	6826	277	1	9	20	SINGLE
---	ACF2005T	ACF2005C	ACF2005C24	2000	6826	480	1	9	20	SINGLE
ACF3008	ACF3008T	ACF3008C	ACF3008C24	3000	10,239	208	1	9	20	SINGLE
ACF3002	ACF3002T	ACF3002C	ACF3002C24	3000/2250	10,239	240/208	1	9	20	SINGLE
ACF3007	ACF3007T	ACF3007C	ACF3007C24	3000	10,239	277	1	9	20	SINGLE
---	ACF3005T	ACF3005C	ACF3005C24	3000	10,239	480	1	9	20	SINGLE
ACF4008	ACF4008T	ACF4008C	ACF4008C24	4000	13,652	208	1	9	20	SINGLE
ACF4002	ACF4002T	ACF4002C	ACF4002C24	4000/3000	13,652	240/208	1	9	20	SINGLE
ACF4007	ACF4007T	ACF4007C	ACF4007C24	4000	13,652	277	1	9	20	SINGLE
---	ACF4005T	ACF4005C	ACF4005C24	4000	13,652	480	1	9	20	SINGLE
---	ACF6008CT	ACF6008C	ACF6008C24	6000	20,478	208	1	18	40	DOUBLE
---	ACF6002T	ACF6002C	ACF6002C24	6000/4500	20,478	240/208	1	18	40	DOUBLE
---	ACF6007T	ACF6007C	ACF6007C24	6000	20,478	277	1	18	40	DOUBLE
---	ACF6005T	ACF6005C	ACF6005C24	6000	20,478	480	1	18	40	DOUBLE
---	ACF8008CT	ACF8008C	ACF8008C24	8000	27,304	208	1	18	40	DOUBLE
---	ACF8002CT	ACF8002C	ACF8002C24	8000/6000	27,304	240/208	1	18	40	DOUBLE
---	ACF8007CT	ACF8007C	ACF8007C24	8000	27,304	277	1	18	40	DOUBLE
---	ACF8005CT	ACF8005C	ACF8005C24	8000	27,304	480	1	18	40	DOUBLE


Add W for white, SW for silica white or SS for stainless steel (see page 8 for optional colors and contact your °STELPRO representative for all other colors)
 --- not available

THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE		HEAT RISE	
KW	M	FT.	°C	°F
1.5	4.1	13'7"	30	53
2	4.1	13'7"	42	75
3	4.1	13'7"	61	110
4	4.1	13'7"	74	133
6	4.1	13'7"	61	110
8	4.1	13'7"	74	133

TECHNICAL DRAWINGS

SINGLE UNIT

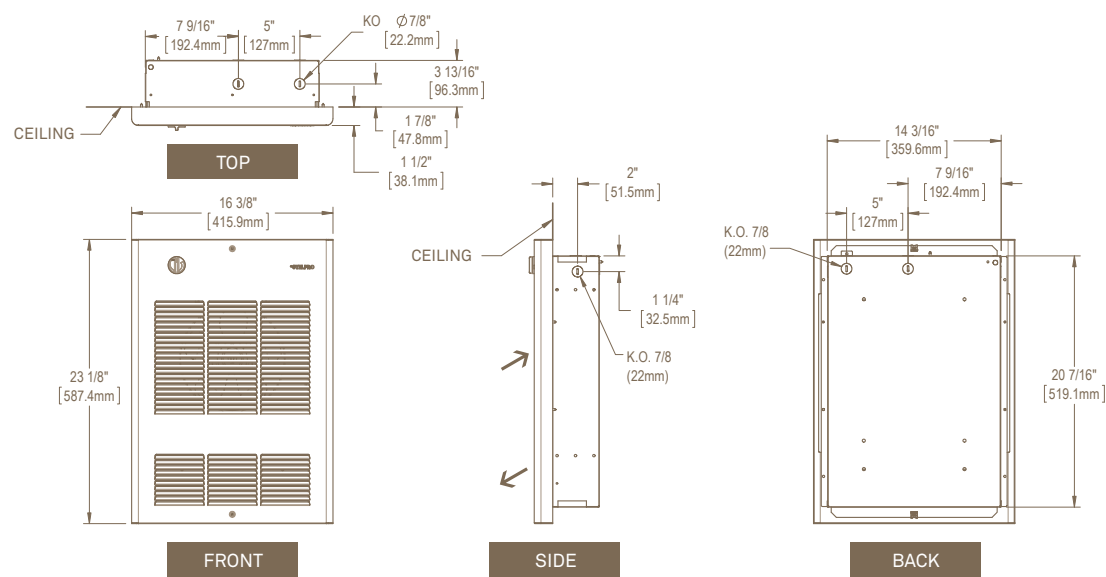

DOUBLE UNIT

