




Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

XSAV12373TT

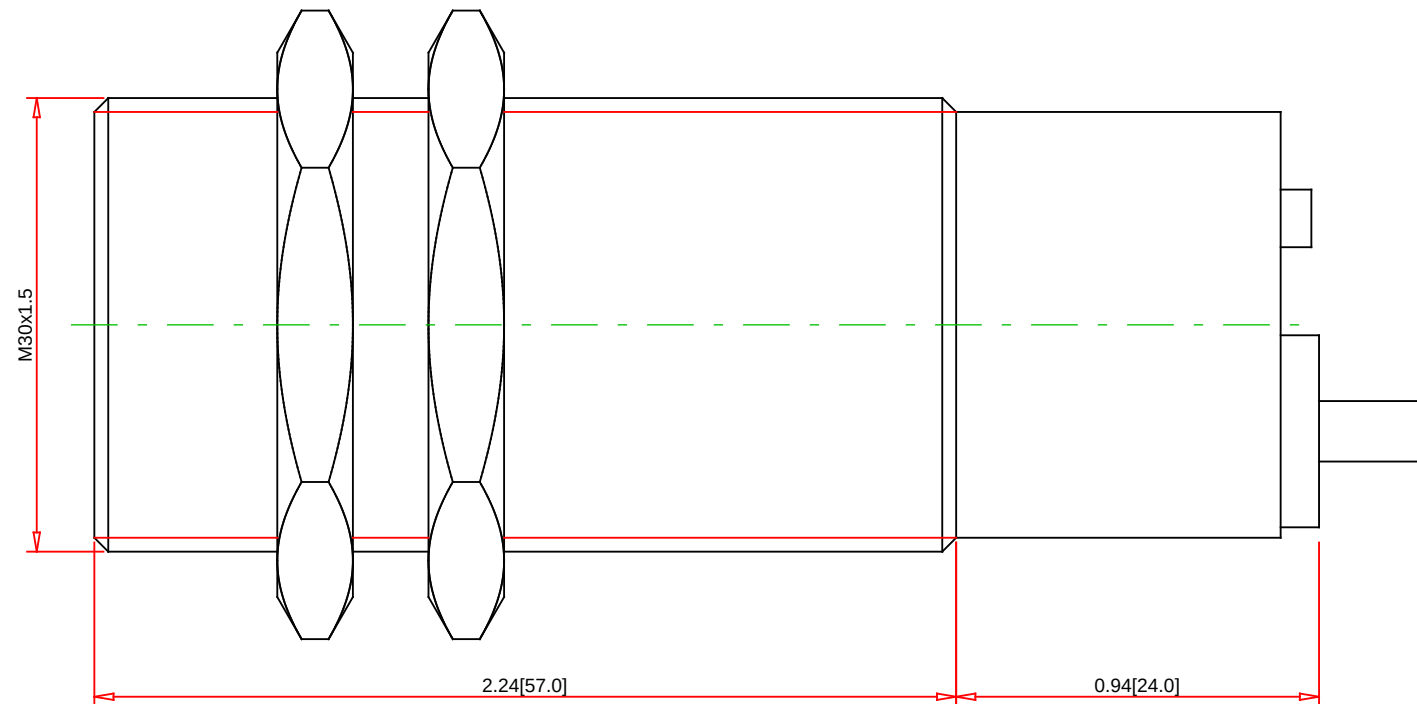

Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Detecting Distance: 10.0 mm (0.39 in)
Circuit Type: PNP
Output Mode: NO
Volts Type: DC
Voltage Range: 12-24 VDC
Max Load: 200 mA
Shielding: Shielded
Max Switching Frequency: 48000 pulse/min
Temp Range: -25° to 85° C (-13° to 185° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP67
Standards: UL, CE Rohs

Specification:

Sensor Type: Inductive
Description: Proximity Sensor, Inductive, 30 mm Barrel, 12-24 VDC, Shielded
Body Style: Barrel
Diameter: mm
Housing Material: Nickel Plated Brass
Cable Size: 2.0 m (6.6 ft)
Connector Type:
Special Features: Motion Detection Sensor, High Temp Operation (85C)