



## Main

|                             |                 |
|-----------------------------|-----------------|
| Range of product            | Harmony XB5     |
| Bezel material              | Plastic         |
| Product or component type   | Annunciator     |
| Mounting diameter           | 0.87 in (22 mm) |
| Cap/operator or lens colour | Yellow          |

## Complementary

|                                    |                                               |
|------------------------------------|-----------------------------------------------|
| [Us] rated supply voltage          | 24 V +/- 10 %                                 |
| Supply circuit type                | AC/DC                                         |
| Supply frequency                   | 50/60 Hz                                      |
| Current consumption                | <= 58 mA                                      |
| Signalling type                    | Continuous or intermittent tone               |
| Resistance to high pressure washer | 1305.34 psi (9000000 Pa) 176 °F (80 °C) 0.1 m |
| Height                             | 1.14 in (29 mm)                               |
| Width                              | 1.14 in (29 mm)                               |
| Maximum Depth                      | 2.17 in (55 mm)                               |
| Net Weight                         | 0.05 lb(US) (0.024 kg)                        |

## Environment

|                                       |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Noise level                           | 90 dB 0.1 m                                                                                                                                              |
| Protective treatment                  | TH                                                                                                                                                       |
| Ambient air temperature for storage   | -40...158 °F (-40...70 °C)                                                                                                                               |
| Ambient air temperature for operation | -40...158 °F (-40...70 °C)                                                                                                                               |
| Overvoltage category                  | Class II IEC 60536                                                                                                                                       |
| IP degree of protection               | IP20 IEC 60529 rear face)<br>IP66 IEC 60529<br>IP67<br>IP69<br>IP69K                                                                                     |
| NEMA degree of protection             | NEMA 4X<br>NEMA 13                                                                                                                                       |
| IK degree of protection               | IK05 conforming to EN 50102<br>IK03 IEC 50102                                                                                                            |
| Standards                             | IEC 60947-1<br>JIS C8201-5-1<br>UL 508<br>IEC 60947-5-1<br>IEC 60947-5-4<br>CSA C22.2 No 14<br>EN 60947-5-1<br>EN 60947-1<br>EN 60947-5-4<br>JIS C8201-1 |
| Product certifications                | UL Listed<br>CSA<br>BV                                                                                                                                   |

## Ordering and shipping details

|                       |                       |
|-----------------------|-----------------------|
| Category              | 00028 - DATA PORTS    |
| Discount Schedule     | CS2                   |
| GTIN                  | 00785901044598        |
| Nbr. of units in pkg. | 1                     |
| Package weight(Lbs)   | 0.06 lb(US) (0.03 kg) |
| Returnability         | Yes                   |
| Country of origin     | ID                    |


## Packing Units

|                  |          |
|------------------|----------|
| Package 1 Height | 0.340 dm |
| Package 1 width  | 0.330 dm |
| Package 1 Length | 0.600 dm |

## Offer Sustainability

|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                                                                                                                                                                                       |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                                                                                                                                                                                           |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                                                                                                                                                                                              |
| Mercury free               | Yes                                                                                                                                                                                                                                                                                         |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                                                                                                                                                                                         |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>                                                                                                                                                                                                                                                      |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                                                                                                                                                                                               |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.                                                                                                                                                                |


## Dimensions

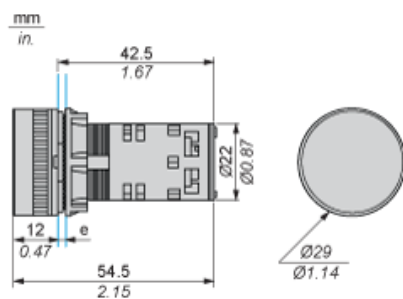

e: Clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Buzzer

Connection by Screw Clamp Terminals




- (1) Diameter on finished panel or support  
(2) Ø22.5 mm recommended ( $\text{Ø}22.3 \text{ }_0^{+0.4}$ ) / Ø0.89 in. recommended ( $\text{Ø}0.88 \text{ in. }_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|-----------------------------------------------|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |

---

Cabling of Annunciators

---

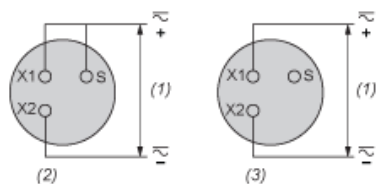

- (1) Supply
- (2) Intermittent
- (3) Continuous