
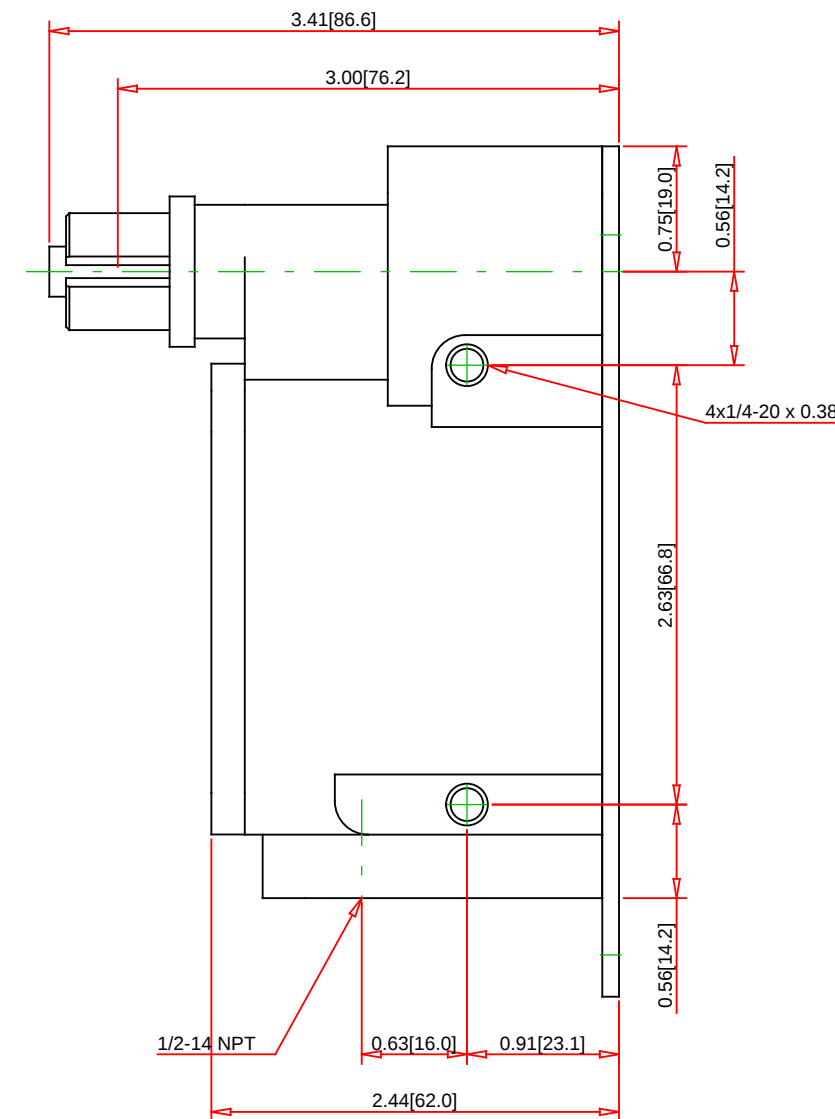


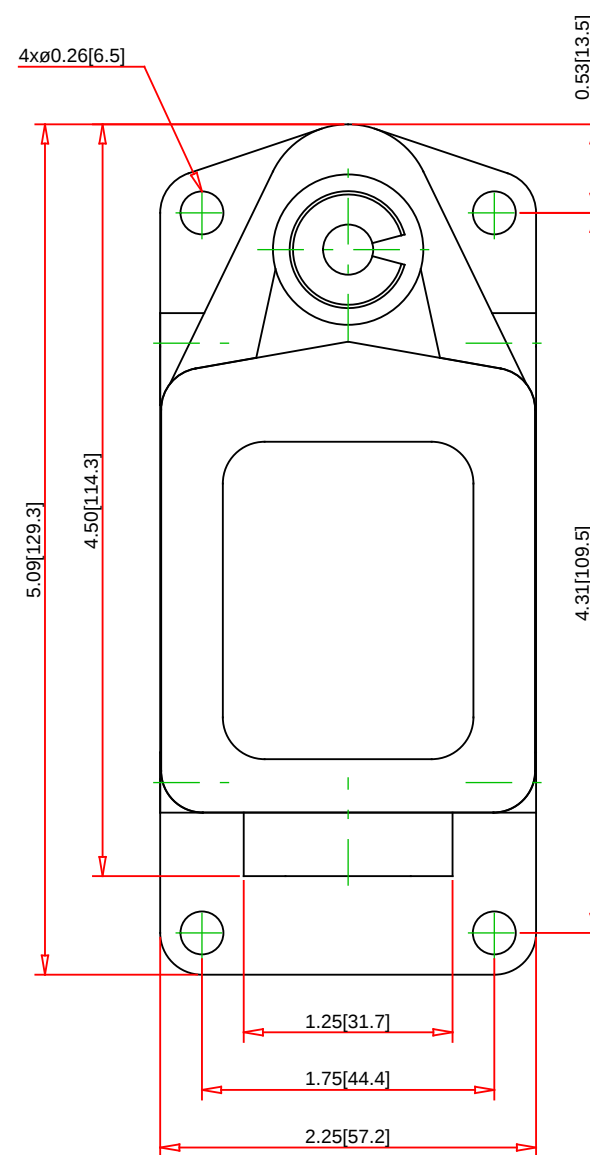

Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9007FTUD1



Telemecanique
Sensors

Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: Screw Clamp
Enclosure Rating: NEMA 1/2/4/12/13/IP65/IP66/IP67
Approvals: UL # Number E78403 CCN NKCR - CSA # LR25490 Class 3211-03 - CE
Weight: 2.57 lb. (1.17 kg)
Conforming to Standards: NEMA A600 UL508
RoHS: No
Operating Temperature Range: -10 to 180° F
Shock Resistance: 30G
Vibration Resistance: 10G (10-150Hz)
Max. Actuation Speed :
Repeat Accuracy: ±0.004 in (0.10 mm)
Operating Torque/Force: 12 in-Pounds
Cable Length:

Specification:

Description: 9007FT, rotary, spring return CW, seq 1, style D, 0.5" NPT
Body Style/Type Description: NEMA Square D Limit Switches 9007 T/FT Severe Duty 59mm Metal Body
Head Type: Rotary lever operated
Lever Arms: Ordered separately
Body with Contact Type: Spring return CW, Sequence 1, Style D baseplate, 1/2-14 NPT
Conduit Thread: 1/2-14 NPT
Ampere Rating Continuous: 20A
Maximum Voltage Rating: 600V
Actuation: CW
Actuator Action: Spring Return (CW)
Lever Arm Length:
Roller Dimension:
Roller Material:
Contact Configuration: 1 N.O./1 N.C.
Contact Operation: Snap Action
Connection Type: Conduit Entrance (1/2-14 NPT)
Head Material: Cast Zinc
Positive Opening: No