

K



TYPE C

Features

- Manufactured from special bronze alloy except 100 and 200 amp styles. Arched bottoms
- All formed corners are designed with a radius

Benefits

- Spring type material ensures positive contact. Provide firm and secure mounting, and prevents expansion after fuse is inserted.
- Prevents fracturing

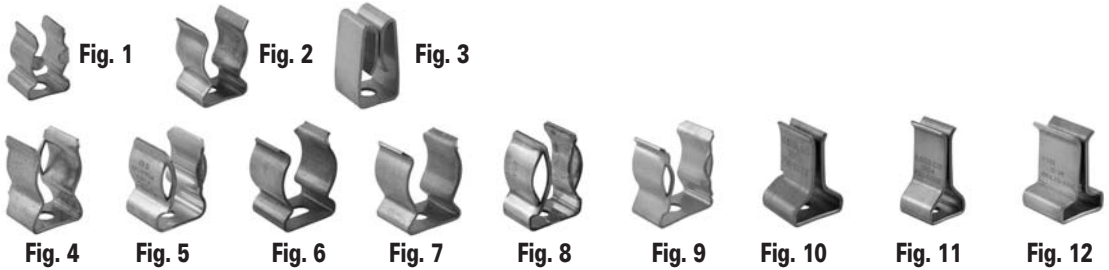

Catalog Number	Figure Number	Amp-Volts	Dimensions									
			A	B	C	Bolt Size	D	E	F	G	H	J
C-10	1	30-250	7/8	3/64	19/32	#10	13/64	17/32	9/16	1/32	19/32	1/2
C-11	4	60-250	1-1/8	1/16	51/64	#10	15/64	51/64	13/16	3/64	21/32	5/8
C-12	5	60-250	1-1/8	1/16	13/16	#8	3/16	47/64	13/16	3/64	21/32	5/8
C-13	9	60-600	1-9/32	1/16	1-1/8	1/4	17/64	13/16	1-1/16	3/64	21/32	5/8
C-14	6	60-350	1	-	51/64	*	*	5/8	13/16	3/64	-	5/8
C-15	7	60-250	1-1/32	-	51/64	#10	13/64	5/8	13/16	3/64	-	5/8
C-16	11	100-250	1-43/64	-	29/32	1/4	17/64	1-11/64	1/8	5/64	-	7/8
C-17	10	100-250	1-23/64	-	15/16	1/4	17/64	57/64	1/8	5/64	-	7/8
C-19	2	30-250	7/8	-	39/64	#8	11/64**	17/32	9/16	1/32	-	1/2
C-23	8	60-600	1-5/16	1/16	31/32	#8	3/16	29/32	1-1/16	3/64	21/32	23/32
C-24	12	200-250/600	1-15/16	-	1-1/4	5/16	11/32	1-1/8	3/16	3/32	-	1-1/4
C-28	3	50-250	61/64	-	1/2	#8	3/16	23/32	7/64	3/64	-	1/2

** Stud hole center 9/32 from one side and 7/32 from other side.

* Slotted 13/64 x 13/32.