


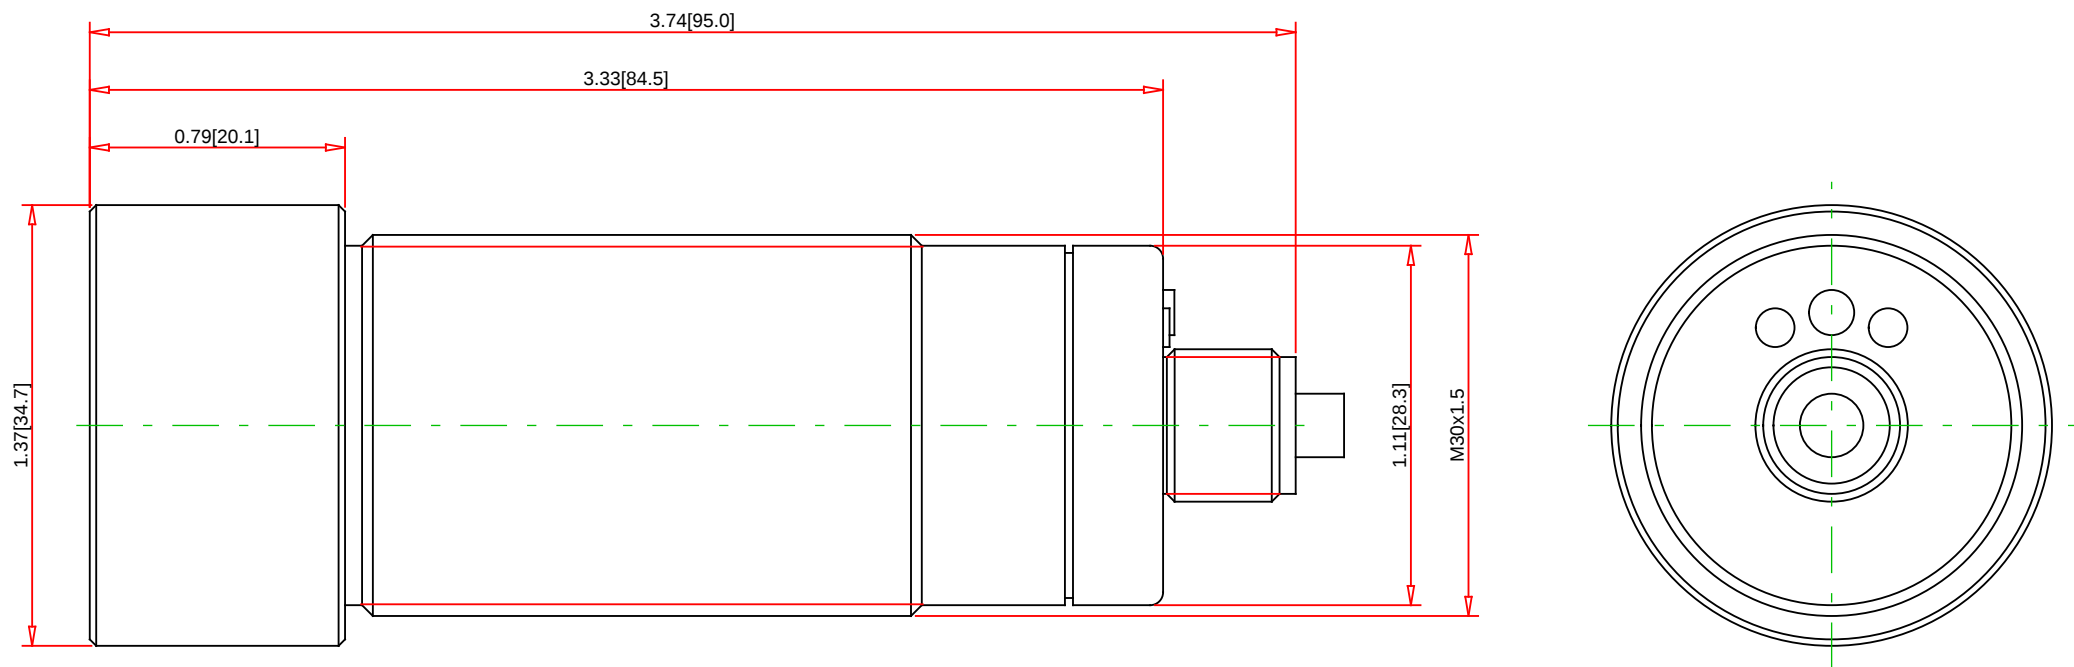

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:
SM902A100000LE

 **Telemecanique**
Sensors
Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Sensing Window:
Far Limit:
Sensing Range: 50.8 mm to 1.0 m (2.0 in to 39.0 in)
Circuit Type: Normally Open
Output Mode: NPN/PNP
Volts Type: DC
Voltage Range: 12-24 VDC
Max Load: 100 mA
Current Consumption: 100 mA
Sonic Frequency: 200 Hz
Temp Range: 0° to 50° C (32° to 122° F)
NEMA Type: 4X (indoor use only)
IP Rating: IP67
Standards: UL, CE Rohs

Specification:

Sensor Type: Ultrasonic Sensor
Description: Ultrasonic Sensor, Dual-Level - Pump-out Latch, 30 mm Barrel, 12-24 VDC
Body Style: Barrel
Diameter: mm
Housing Material: Silicone Rubber
Face Material: No
Field Configurable: Default Window: ± 6.4 mm (0.25 in)
Functionality: 3.0 m (10 ft)
Cable Size:
Connector Type:
Special Features: