



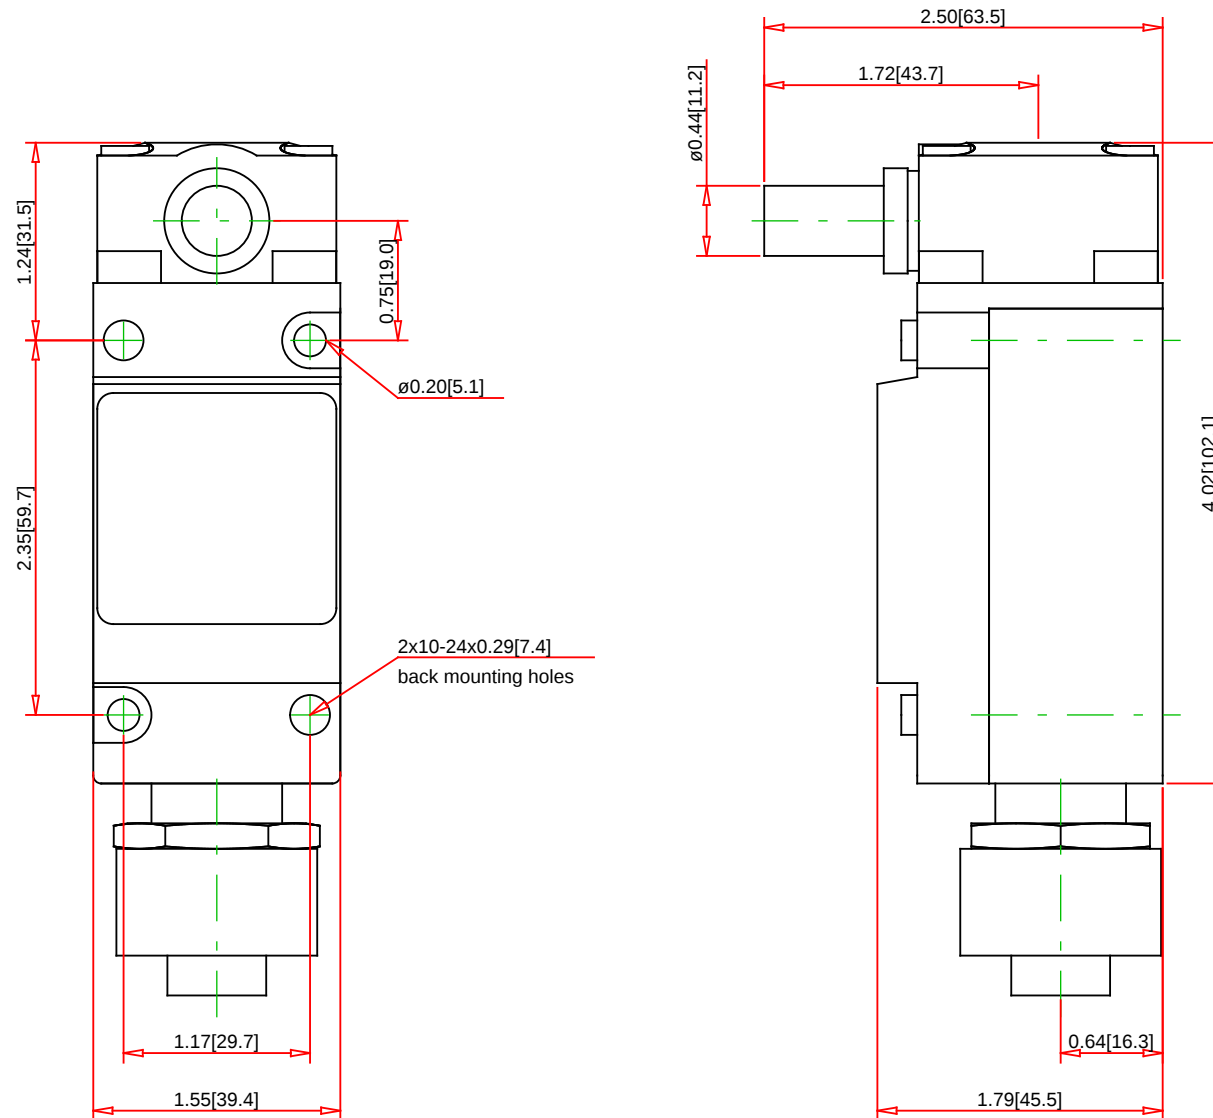

Note:
- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

9007C62B2Y1852



Telemecanique Sensors
1875 Founders Drive
Dayton, OH 45420-4017
Customer Care Center : 1-800-435-2121
Web : www.tesensors.com

Technical Information:

Terminal Type: NEMA 1/2/4/6/6P/12/13
Enclosure Rating: UL# E42259 CCN NKCR - CSA # LR25490 Class 3211-03 - CE Marked
Approvals: 1.25 lb
Weight: NEMA and UL type 6P, NOM, ANCE
Conforming to Standards: No
RoHS: -20 to 185 °F
Operating Temperature Range: 60 gn (9ms)
Shock Resistance: 25 gn (10-150 Hz, 11 ms)
Vibration Resistance: 15.2 mpm / 27.4mpm (50 fpm / 90 fpm) + 45 degree cam, levers only
Max. Actuation Speed : 0.05mm (+/- 0.002 in.)
Repeat Accuracy: 4 in-Pounds
Operating Torque/Force: 8 ft
Cable Length:

Specification:

Description: std. rotary spring rtn std pretravel CW+CCW
Body Style/Type Description: NEMA Square D 9007 Limit Switches 9007C Heavy Duty SemiModular 39mm Metal Body
Head Type: 9007B2 rotary spring return, std. pretravel, CW+CCW
Lever Arms: Lever Arm (ordered separately)
Body with Contact Type: 2 N.O. / 2 N.C. DPDT Snap Action
Conduit Thread: Potted and Prewired + STOWA cord (8 Feet)
Ampere Rating Continuous: 10A
Maximum Voltage Rating: 600V
Actuation: CW and CCW
Actuator Action: Spring Return - standard Pretravel
Lever Arm Length:
Roller Dimension:
Roller Material:
Contact Configuration: 2 N.O./2 N.C.
Contact Operation: Snap Action
Connection Type: Potted and Prewired + STOWA cord (8 Feet)
Head Material: Zinc Alloy
Positive Opening: No