


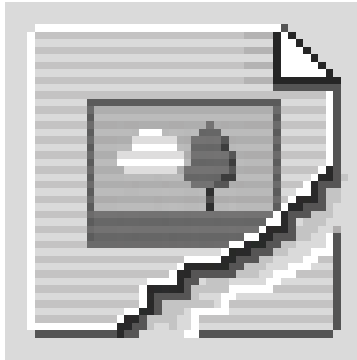

SKU: ATTA-350-38

UPC: 0783669992175

Features & Benefits:

Description: Aluminum Anti-Turn Mechanical Lug, Conductor Range 350-6, 1 Conductor, 3/8in Bolt Size, Tin Plated, UL, CSA

Specs

Additional Class Attributes

Anti-Turn Key	Yes
Connection	Mechanical
Contains DE-OX®	No
Mounting Hole Type	Thru
Number of Conductors	1
Number of Mounting Holes	1
Number of Poles	1
Number of Ports / Wireways	1

Dimensions

Dimension G (IN)	0.406
Drive Size Main	3/8
Drive Type Main	Internal Hex
Height (IN)	1.125
Height (mm)	28.575
Length (IN)	1.906
Length (mm)	48.4124
Mounting Bolt/Stud Size (mm)	965.2
Mounting Hole Diameter (IN)	0.437
Mounting Hole Diameter (mm)	11.0998
Mounting Hole Spacing (mm)	0
Tang Length (IN)	0.906
Tang Length (mm)	23.0124
Tang Thickness (IN)	0.25
Tang Thickness (mm)	6.35
Tang Width (IN)	1
Tang Width (mm)	25.4
Weight (LB)	0.079
Width (IN)	1
Width (mm)	25.4

Material and Finish

Conductor Material	Aluminum
Connector Finish	Tin
Insulation	NA
Material	Aluminum
Wire Binding Hardware Finish	Tin



Wire Binding Hardware Material

Aluminum

Additional Technical Specifications

Conductor Type

Stranded

Bolt and Screw Sizes

Mounting Bolt/Stud Size	3/8
Number of Wire Binding Screws per Port	1
Wire Binding Screw Size	3/4
Wire Binding Torque	375

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 15
Direct Burial	No
Dual Rated	Yes
NEMA Code	S-588-3
UPC Code	78366999217

Testing Standards

CSA File Number	LR-29601
CSA Standard	C22.2 No. 65-03
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	453G
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E6207

Environment and Temperature

Temperature Rating	90°C
--------------------	------

Color

Color	Silver
-------	--------

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	350 kcmil - 6 Str
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	350 kcmil - 6 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA
Wire Combinations	NA



Voltage

Voltage Rating

35 kV