


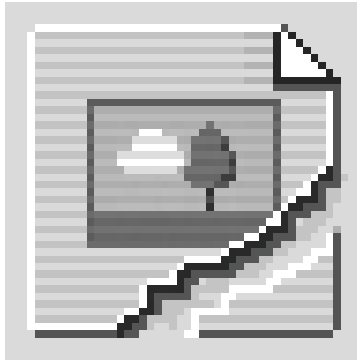

SKU: CSWN-400-12

UPC: 0783669685718

Features & Benefits:

Description: Surecrimp Copper Compression Lug, Conductor Size 400, 1 Hole, 1/2in Bolt Size, Standard Barrel, Sight Window, Narrow Tang, Tin Plated, UL, CSA

Specs

Additional Class Attributes

Barrel Marking	Ink
Barrel Type	Standard
Connecting Angle	180°
Connection	Compression
Contains DE-OX®	Yes
Flared End	No
ILSCOs Die Catalog Number	ILD-76
ILSCOs Die Index Number	I-76
Mounting Hole Type	Thru
Narrow Tang	Yes
Number of Mounting Holes	1
Sight Window	Yes
Slotted	No
Tang End Shape	Square
Undrilled	No

Dimensions

Barrel Length (IN)	1.188
Barrel Length (mm)	30.1752
Dimension G (IN)	0.546
Dimension G (mm)	13.8684
Height (IN)	0.982
Height BX (IN)	2.25
Height (mm)	24.9428
Inside Diameter (IN)	0.75
Inside Diameter (mm)	19.05
Length (IN)	3.105
Length (mm)	78.867
Mounting Bolt/Stud Size (mm)	304.8
Mounting Hole Diameter (IN)	0.562
Mounting Hole Diameter (mm)	14.2748
Mounting Hole Spacing (mm)	0
Outside Diameter (IN)	0.937
Outside Diameter (mm)	23.7998
Strip Length (mm)	31.7627
Tang Length (IN)	1.25
Tang Length (mm)	31.75
Tang Thickness (IN)	0.236
Tang Thickness (mm)	5.9944



Tang Width (IN)	0.922
Tang Width (mm)	23.4188
Weight (LB)	0.20301860633231
Weight BX (LB)	2.0999
Width (IN)	0.937
Width BX (IN)	5
Width (mm)	23.7998

Conductor Ranges

Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Stranded (Primary, run, main, line)	400 kcmil
Conductor Range AL Solid (Primary, run, main, line)	NA
Expanded Conductor Range	400 kcmil - 4/0 Str
Flex Conductor Range	300 G,H,I,K,M 313.1 DLO

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Insulation	NA
Material	Copper

Additional Technical Specifications

Conductor Type	Stranded
----------------	----------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 6
Direct Burial	Yes
Dual Rated	No
NEMA Code	S-588-3
UPC Code	78366968571

Bolt and Screw Sizes

Mounting Bolt/Stud Size	1/2
-------------------------	-----

Testing Standards

CSA File Number	LR-29601
CSA Standard	C22.2 No. 65-03
NEBS Rating	Level 3
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	453G
UL / CULUS Specification	UL 486A/B Listed
UL File Number	E6207

Environment and Temperature

Color

Color	Silver
Color Code	Blue

Voltage

Voltage Rating	35 kV
----------------	-------