


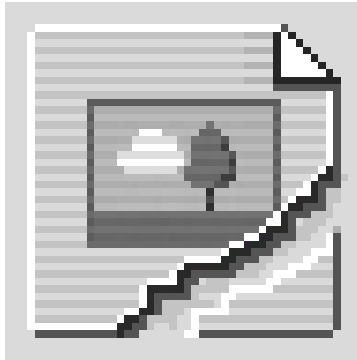

SKU: GBT-1/0-M

UPC: 0783669000733

Features & Benefits:

Description: Aluminum Intersystem Ground Tap, Dual Rated, Main Conductor Range 1/0-8, Tap Range 2-14, Mountable, UL, CSA

Specs

Additional Class Attributes

Connection	Mechanical
Mounting Hole Type	Thru
Number of Conductors	1
Number of Mounting Holes	2
Number of Ports / Wireways	1
Wire Orientation	Perpendicular

Dimensions

Dimension G (IN)	0.28
Dimension G (mm)	7.112
Height (IN)	1.16
Height BX (IN)	2.25
Height (mm)	29.464
Length (IN)	2.25
Length (mm)	57.15
Mounting Hole Diameter (IN)	0.266
Mounting Hole Diameter (mm)	6.7564
Mounting Hole Spacing (IN)	1.164
Mounting Hole Spacing (mm)	29.5656
Tang Length (IN)	0.625
Tang Length (mm)	15.875
Tang Thickness (IN)	0.15
Tang Thickness (mm)	3.81
Tang Width (IN)	2.25
Tang Width (mm)	57.15
Weight (LB)	0.24
Weight BX (LB)	2.3448
Width (IN)	1.75
Width BX (IN)	5
Width (mm)	44.45

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Enclosure Material	NA
Insulation	NA
Material	Aluminum



Wire Binding Hardware Material

Stainless steel

Additional Technical Specifications

Conductor Type

Stranded

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 6
Direct Burial	Yes
Dual Rated	Yes
NEMA Code	S-573-2
UPC Code	78366900073

Bolt and Screw Sizes

Mounting Bolt/Stud Size

1/4

Testing Standards

CSA File Number	LR-29601
CSA Standard	C22.2 No. 65-03
Prop65 Compliance	This product is in compliance with Prop65. It is not known to contain any chemicals associated with this regulation
UL Control Number	667P
UL / CULUS Specification	UL 467 Listed
UL File Number	E34440

Color

Color

Silver

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	2 Sol - 14 Sol
Conductor Range AL Stranded (Primary, run, main, line)	1/0 Str - 8 Str
Conductor Range AL Stranded (Secondary, tap, load)	2 Str - 14 Str
Conductor Range CU Solid (Primary, run, main, line)	1/0 Sol - 8 Sol
Conductor Range CU Solid (Secondary, tap, load)	2 Sol - 14 Sol
Conductor Range CU Stranded (Primary, run, main, line)	1/0 Str - 8 Str
Conductor Range CU Stranded (Secondary, tap, load)	2 Str - 14 Str
Conductor Range AL Solid (Primary, run, main, line)	1/0 Sol - 8 Sol