


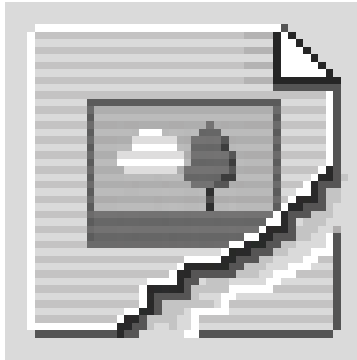

SKU: GPL-70

UPC: 0783669262056

Features & Benefits:

Description:Permaground Copper U-Bolt Ground Clamp, Conductor Range 250-2/0 Sol, Pipe Size 5in, Ground Rod Sizes 5 to 5-1/2in, UL, CSA

Specs

Additional Class Attributes

Connection	Mechanical
Number of Conductors	1
Number of Ports / Wireways	1
Wire Orientation	Perpendicular

Conductor Ranges

Conductor Range AL Solid (Secondary, tap, load)	NA
Conductor Range AL Stranded (Primary, run, main, line)	NA
Conductor Range AL Stranded (Secondary, tap, load)	NA
Conductor Range CU Solid (Primary, run, main, line)	4/0 Sol - 2/0 Sol
Conductor Range CU Solid (Secondary, tap, load)	NA
Conductor Range CU Stranded (Primary, run, main, line)	250 kcmil - 2/0 Str
Conductor Range CU Stranded (Secondary, tap, load)	NA
Conductor Range AL Solid (Primary, run, main, line)	NA
Ground Rod Size	5
NPS/IPS Pipe Size	5

Dimensions

Drive Size Main	3/8
Drive Type Main	External Hex
Height (IN)	8.665
Height BX (IN)	3.75
Height (mm)	220.091
Length (IN)	7
Length (mm)	177.8
Weight (LB)	3.222
Weight BX (LB)	9.861
Width (IN)	1.552
Width BX (IN)	5.25
Width (mm)	39.4208

Material and Finish

Conductor Material	Copper
Connector Finish	NA
Insulation	NA



Material	Copper
Wire Binding Hardware Material	Silicon bronze

Additional Technical Specifications

Conductor Type	Solid
----------------	-------

Bolt and Screw Sizes

Clamping Bolt Size	1/4
--------------------	-----

Number of Wire Binding Screws per Port	0
--	---

Wire Binding Screw Size	NA
-------------------------	----

General

Bag Quantity	1
--------------	---

Carton Quantity Description	STD PACK QTY 3
-----------------------------	----------------

Direct Burial	Yes
---------------	-----

Dual Rated	No
------------	----

NEMA Code	0-000-1
-----------	---------

UPC Code	78366926205
----------	-------------

Testing Standards

CSA File Number	LR-29601
-----------------	----------

CSA Standard	C22.2 No. 65-03
--------------	-----------------

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
-------------------	---

UL Control Number	667P
-------------------	------

UL / CULUS Specification	UL 467 Listed
--------------------------	---------------

UL File Number	E34440
----------------	--------