
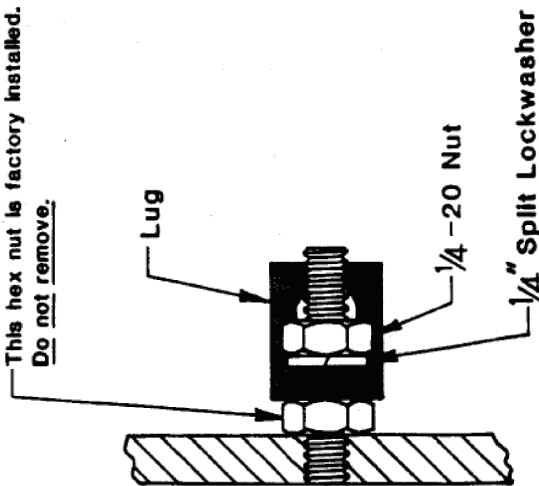
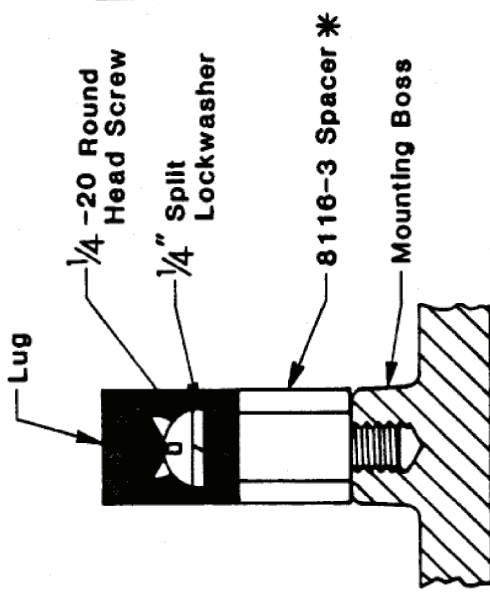


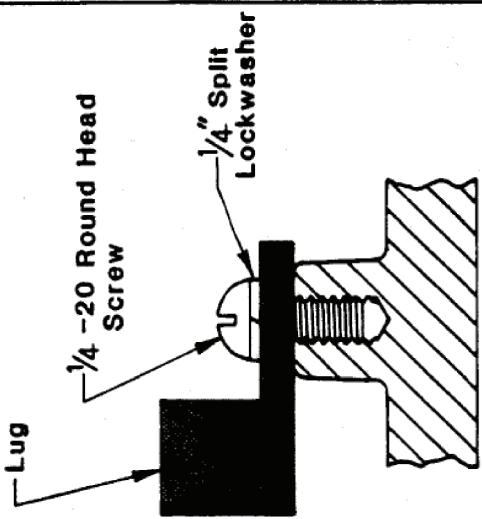

INSTRUCTIONAL DATA SHEET FOR FIELD INSTALLATION OF GROUNDING LUG KITS

HUBBELL ELECTRICAL PRODUCTS
A Division of HUBBELL INCORPORATED (Delaware)
3940 Martin Luther King Drive
St. Louis, Missouri 63113 USA

KILLARK®

GROUNDING KIT	WIRE RANGE	GROUNDING KIT	WIRE RANGE	GROUNDING KIT	WIRE RANGE
KIT-344	2-14 AWG	KIT-345 KIT-339	2-14 AWG 2/0-6 AWG	KIT-343 KIT-251 KIT-252	2-14 AWG 2/0-6 AWG 300MCM-6 AWG
Place lug on 1/4-20 threaded rod. Then add split lockwasher and nut. Tighten securely. This hex nut is factory installed. <u>Do not remove.</u> 		Screw spacer in mounting boss securely. Fasten lug to spacer or pan (when installed), using 1/4-20 screw and 1/4" split lockwasher. 		Fasten lug to mounting boss, using 1/4-20 screw and 1/4" split lockwasher. 	
NOTE: Stud is staked in place at Killark to prevent removal.		* Spacer not used when Pan is installed; mount directly to pan.			