



FACTORY SEALED TUMBLER SWITCHES AND GROUND FAULT INTERRUPTER



Tumbler Switch
Complete Unit
(Box and Cover)



Ground Fault Interrupter
Complete Unit
(Box and Cover)



UGRGF Series GFI
Control Station with
UGR Receptacle

Class I, Div. 1 & 2, Groups C, D
Class I, Zones 1 & 2, Groups IIB, IIA
Class II, Div. 1 & 2, Groups E, F, G
Class III
Type 3

FXS Tumbler Switches

UL LISTED - File E53360 and/or File E10501
CSA Certified - File LR11712

FXS Ground Fault Interrupters

UL LISTED - File E80595
CSA Certified - File LR61895

FEATURES-SPECIFICATIONS

Features

- Test and Reset push buttons are provided on cover assembly. Unit should be tested monthly
- Compliant to UL943 GFCI standards
- Exterior gasket provides Type 3 weatherproof protection
- Ground boss for grounding in the splice box
- Color coded wiring
- Tumbler switch comes with capability to be locked out in OFF position as standard

Materials


- Captive cover bolts are made from stainless steel
- Device bodies are cast aluminum (less than 0.04 of 1% copper).

Electrical Rating

- GFI units are rated at 20A, 120 VAC, 60HZ. Class A.
- 4-6 milliamp trip setting
- Trip Time-UL Curve



FACTORY SEALED TUMBLER SWITCHES - CATALOG LOGIC

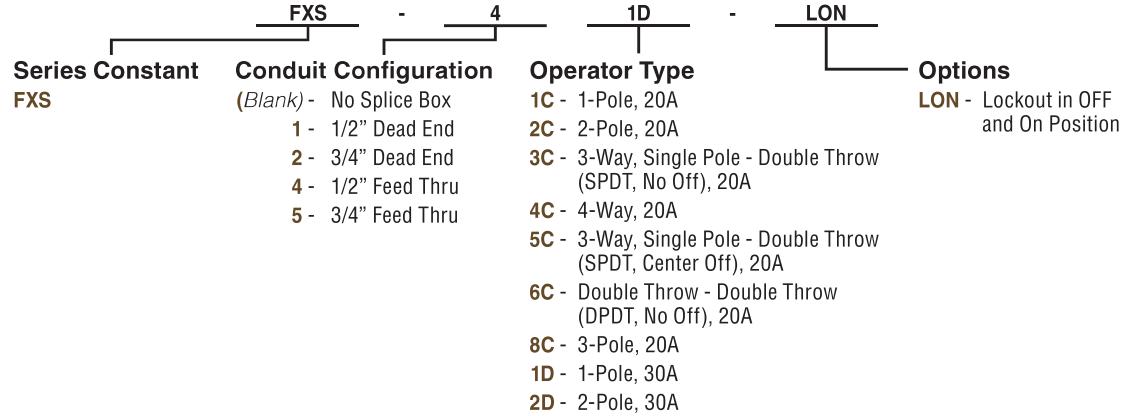

FXS TUMBLER SWITCHES								
CATALOG NUMBER			HUB SIZE	SWITCH STYLE	SWITCH RATING			
COMPLETE UNIT								
COVER WITH SWITCH	(BOX, COVER AND SWITCH)							
	DEAD-END	FEED-THRU						
FXS-1C	FXS-11C	FXS-41C	1/2"	1-POLE	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-21C	FXS-51C	3/4"					
FXS-2C	FXS-12C	FXS-42C	1/2"	2-POLE	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-22C	FXS-52C	3/4"					
FXS-8C	FXS-18C	FXS-48C	1/2"	3-POLE	15 A, 240/480 VAC, 30; 3 HP at 240 VAC; 5 HP at 480 VAC			
	FXS-28C	FXS-58C	3/4"					
FXS-3C	FXS-13C	FXS-43C	1/2"	3-WAY/ SPDT (NO OFF)	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-23C	FXS-53C	3/4"					
FXS-5C	FXS-15C	FXS-45C	1/2"	SPDT (CENTER OFF)	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-25C	FXS-55C	3/4"					
FXS-6C	FXS-16C	FXS-46C	1/2"	DPDT (NO OFF)	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-26C	FXS-56C	3/4"					
FXS-1D	FXS-11D	FXS-41D	1/2"	1-POLE	30 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-21D	FXS-51D	3/4"					
FXS-2D	FXS-12D	FXS-42D	1/2"	2-POLE	30 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			
	FXS-22D	FXS-52D	3/4"					
FXS-4C	—	—	—	4-WAY	20 A, 120/277 VAC, 10; 1 HP at 120 VAC; 2 HP at 240 VAC			



GROUND FAULT INTERRUPTER - CATALOG LOGIC

Series Constant FXS-GFI	FXS-GFI - 3020 - PL	Options PL - GFCI with LED Pilot Light
		03 - Ground Fault Interrupter (Cover Only) 1020 - Ground Fault Interrupter, 1/2" Dead End Back Box 2020 - Ground Fault Interrupter, 3/4" Dead End Back Box 3020 - Ground Fault Interrupter, 1" Dead End Back Box 1120 - Ground Fault Interrupter, 1/2" Feed Thru Back Box 2120 - Ground Fault Interrupter, 3/4 "Feed Thru Back Box 3120 - Ground Fault Interrupter, 1" Feed Thru Back Box

FXS GROUND FAULT INTERRUPTER				
CATALOG NUMBER			HUB SIZE	
COMPLETE UNIT	COVER ASSEMBLY	BACK BOX		
FXS-GFI-1020	FXS-GFI03	FXB-1	DEAD END	1/2"
FXS-GFI-2020		FXB-2		3/4"
FXS-GFI-3020		FXB-3		1"
FXS-GFI-1120		FXB-4	FEED THRU	1/2"
FXS-GFI-2120		FXB-5		3/4"
FXS-GFI-3120		FXB-6		1"