




XCS-OB24-GL

By Killark
Catalog # [XCS-OB24-GL](#)

XCS Series - Aluminum 120V Pilot Light Cover With Device -
Green Lens With Nameplate To Be Specified

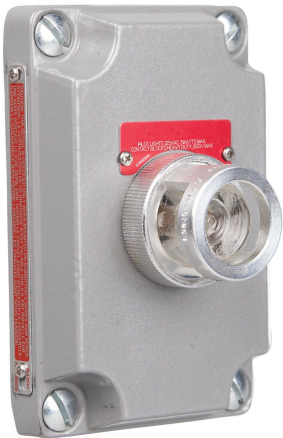

Features

- Copper free cast aluminum alloy.
- Ground flange joint between bolted cover and box provide required flame path.
- Push button, selector switches and pilot light operator bodies are copper-free aluminum.
- Operating shaft in both push buttons and selector switches are stainless steel.

Application

Hazardous locations due to the presence of flammable gases or vapors, combustibile dusts, or easily ignitable fiber or flyings. Installations at petroleum refineries, chemical and petrochemical plants, and other processing or storage facilities where simil

Specifications

UL File Number	E53360
CSA File Number	LR11714
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups C, D • Class I, Zones 1 & 2, Groups IIB, IIA • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2
EU RoHS Indicator	Contact Manufacturer

Configuration

Back Box Type	SWB
Current	
Frequency Rating	50/60 Hz
Amperage Rating	0.25 A
Dimensions	
Height	5.63 in
Width	4 in
Length	5.56 in
Gross Weight with Packaging	1.4
Depth	2-3/32 in
Dimensions	5.56 in x 4 in x 5.63 in
General	
Color	Green
UPC	783936890296
Type	Aluminum Cover With Pilot Light
Material Series	Copper-free aluminum XCS Series
Operational	
Actuator	Pilot Light

Product Assets

[Installation Manual \[French, English\]](#)