

WPD 106 1X70/2X25+3X16 GY**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Product image

Our WPD 1XX distribution blocks are used in all situations where power is supplied and distributed. Their user-friendly design creates a better overview and enables rapid, efficient implementation of space-saving power distribution.

General ordering data

Version	Potential distributor terminal, Screw connection, Light Grey, 70 mm ² , 215 A, 1000 V, Number of connections: 6, Number of levels: 1
Order No.	1562210000
Type	WPD 106 1X70/2X25+3X16 GY
GTIN (EAN)	4050118385281
Qty.	1 pc(s).

WPD 106 1X70/2X25+3X16 GY**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	50.4 mm	Depth (inches)	1.984 inch
Height	74.5 mm	Height (inches)	2.933 inch
Width	39.5 mm	Width (inches)	1.555 inch
Net weight	200 g		

Temperatures

Storage temperature	-25 °C...55 °C	Ambient temperature	-5 °C...40 °C
Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	130 °C

Material data

Material	Wemid	Colour	Light Grey
UL 94 flammability rating	V-0		

Rating data IECEx/ATEX

Certificate No. (ATEX)	CNEX16ATEX0005U	Certificate No. (IECEX)	IECEXCNEX16.0005U
Max. voltage (ATEX)	880 V	Current (ATEX)	160 A
Wire cross section max. (ATEX)	50 mm ²	Max. voltage (IECEX)	880 V
Current (IECEX)	160 A		

System specifications

Version	Screw connection	End cover plate required	No
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	Yes	PE connection	No
Rail	Mounting plate, TS 35	N-function	Yes
PE function	No	PEN function	No

Additional technical data

Explosion-tested version	Yes	Installation advice	Terminal rail / mounting plate
Open sides	closed	Type of mounting	Snap-on

CSA rating data

Certificate number (cCSAus)	70128467
-----------------------------	----------

Conductors for clamping (additional connection)

Connection type, additional connection	Screw connection
--	------------------

WPD 106 1X70/2X25+3X16 GY

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Conductors for clamping (rated connection)

Clamping range, max.	50 mm ²	Clamping range, min.	1.5 mm ²
Connection cross-section, stranded, max.	70 mm ²	Connection direction	on side
Number of connections	6	Type of connection	Screw connection
Type of connection 2	Screw connection	Wire connection cross section AWG, max.	AWG 2/0
Wire connection cross section AWG, min.	AWG 16	Wire connection cross section, finely stranded, max.	0 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	50 mm ²	Wire connection cross-section, solid core, max.	70 mm ²

General

Installation advice	Terminal rail / mounting plate	Number of poles	1
Rail	Mounting plate, TS 35	Standards	IEC 60947-7-1, UL 1059
Wire connection cross section AWG, max.	AWG 2/0	Wire connection cross section AWG, min.	AWG 16

Rating data

Rated cross-section	70 mm ²	Rated voltage	1,000 V
Rated AC voltage	1,000 V	Rated DC voltage	1,500 V
Rated current	215 A	Current at maximum wires	215 A
Standards	IEC 60947-7-1, UL 1059	Power loss in accordance with IEC 60947-7-x	4.8 W

UL rating data

Certificate No. (cURus)	E60693
-------------------------	--------

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
ETIM 8.0	EC000897	ETIM 9.0	EC000897
ETIM 10.0	EC000897	ECLASS 9.0	27-14-11-20
ECLASS 9.1	27-14-11-20	ECLASS 10.0	27-14-11-20
ECLASS 11.0	27-14-11-20	ECLASS 12.0	27-14-11-20
ECLASS 13.0	27-25-01-19	ECLASS 14.0	27-25-01-19
ECLASS 15.0	27-25-01-19		

Environmental Product Compliance

RoHS Compliance Status	Compliant with exemption
RoHS Exemption (if applicable/known)	6c
REACH SVHC	Lead 7439-92-1
SCIP	9b5f0838-1f0b-4c14-9fc7-3f5e6ee75be2

Important note

Product information	The socket complies with flammability class V-2 according to UL94.
---------------------	--

WPD 106 1X70/2X25+3X16 GY

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Approvals

Approvals



Approvals MAMID

https://mdcop.weidmueller.com/mediadelivery/rendition/900_319217/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319221/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319222/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319213/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319230/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319234/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319240/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319260/-T1z1mm-S800/ https://mdcop.weidmueller.com/mediadelivery/rendition/900_319263/-T1z1mm-S800/

ROHS	Conform
UL File Number Search	UL Website
Certificate No. (cURus)	E60693

Downloads

Approval/Certificate/Document of Conformity	Attestation of Conformity UKCA Ex Attestation of Conformity CB Certificate ATEX Certificate IECEX Certificate VDE Certificate CCC Ex Certificate UKCA Ex Certificate DNV Certificate CE Declaration of Conformity UKCA declaration of conformity Confirmation of Standards EN 45545-2_2020-10
---	--


Engineering Data	CAD data – STEP
User Documentation	StorageConditionsTerminalBlocks DATA SHEET WPD 106 NTI WPD 106 Manual - How to connect aluminum wires in WPD-Terminal blocks Torque Conductor Connection Data WPD EN Drehmoment Leiteranschlussdaten WPD DE
Catalogues	Catalogues in PDF-format
Brochures	

WPD 106 1X70/2X25+3X16 GY

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

[illegible][illegible]



CSA testing data according to CSA 22.2 No. 5882

Certificate No. (ISA)

	Level	OP-A	OP-1003	OP-476
ASST 110	10 kVA			
ASST 120				
ASST 130				
ASST 140				
ASST 150	2 kVA			
ASST 160				
ASST 170				
ASST 180				
ASST 190	2 kVA			
ASST 200				
ASST 210				
ASST 220				
ASST 230	110 kVA		10 kVA	10 kVA
ASST 240				
ASST 250				
ASST 260				
ASST 270	110 kVA			
ASST 280				
ASST 290				
ASST 300				

ASST 310
ASST 320
ASST 330
ASST 340
ASST 350
ASST 360
ASST 370
ASST 380
ASST 390
ASST 400
ASST 410
ASST 420
ASST 430
ASST 440
ASST 450
ASST 460
ASST 470
ASST 480
ASST 490
ASST 500
ASST 510
ASST 520
ASST 530
ASST 540
ASST 550
ASST 560
ASST 570
ASST 580
ASST 590
ASST 600
ASST 610
ASST 620
ASST 630
ASST 640
ASST 650
ASST 660
ASST 670
ASST 680
ASST 690
ASST 700
ASST 710
ASST 720
ASST 730
ASST 740
ASST 750
ASST 760
ASST 770
ASST 780
ASST 790
ASST 800
ASST 810
ASST 820
ASST 830
ASST 840
ASST 850
ASST 860
ASST 870
ASST 880
ASST 890
ASST 900
ASST 910
ASST 920
ASST 930
ASST 940
ASST 950
ASST 960
ASST 970
ASST 980
ASST 990
ASST 1000

ASST 1010
ASST 1020
ASST 1030
ASST 1040
ASST 1050
ASST 1060
ASST 1070
ASST 1080
ASST 1090
ASST 1100
ASST 1110
ASST 1120
ASST 1130
ASST 1140
ASST 1150
ASST 1160
ASST 1170
ASST 1180
ASST 1190
ASST 1200
ASST 1210
ASST 1220
ASST 1230
ASST 1240
ASST 1250
ASST 1260
ASST 1270
ASST 1280
ASST 1290
ASST 1300
ASST 1310
ASST 1320
ASST 1330
ASST 1340
ASST 1350
ASST 1360
ASST 1370
ASST 1380
ASST 1390
ASST 1400
ASST 1410
ASST 1420
ASST 1430
ASST 1440
ASST 1450
ASST 1460
ASST 1470
ASST 1480
ASST 1490
ASST 1500
ASST 1510
ASST 1520
ASST 1530
ASST 1540
ASST 1550
ASST 1560
ASST 1570
ASST 1580
ASST 1590
ASST 1600
ASST 1610
ASST 1620
ASST 1630
ASST 1640
ASST 1650
ASST 1660
ASST 1670
ASST 1680
ASST 1690
ASST 1700
ASST 1710
ASST 1720
ASST 1730
ASST 1740
ASST 1750
ASST 1760
ASST 1770
ASST 1780
ASST 1790
ASST 1800
ASST 1810
ASST 1820
ASST 1830
ASST 1840
ASST 1850
ASST 1860
ASST 1870
ASST 1880
ASST 1890
ASST 1900
ASST 1910
ASST 1920
ASST 1930
ASST 1940
ASST 1950
ASST 1960
ASST 1970
ASST 1980
ASST 1990
ASST 2000
ASST 2010
ASST 2020
ASST 2030
ASST 2040
ASST 2050
ASST 2060
ASST 2070
ASST 2080
ASST 2090
ASST 2100
ASST 2110
ASST 2120
ASST 2130
ASST 2140
ASST 2150
ASST 2160
ASST 2170
ASST 2180
ASST 2190
ASST 2200
ASST 2210
ASST 2220
ASST 2230
ASST 2240
ASST 2250
ASST 2260
ASST 2270
ASST 2280
ASST 2290
ASST 2300
ASST 2310
ASST 2320
ASST 2330
ASST 2340
ASST 2350
ASST 2360
ASST 2370
ASST 2380
ASST 2390
ASST 2400
ASST 2410
ASST 2420
ASST 2430
ASST 2440
ASST 2450
ASST 2460
ASST 2470
ASST 2480
ASST 2490
ASST 2500
ASST 2510
ASST 2520
ASST 2530
ASST 2540
ASST 2550
ASST 2560
ASST 2570
ASST 2580
ASST 2590
ASST 2600
ASST 2610
ASST 2620
ASST 2630
ASST 2640
ASST 2650
ASST 2660
ASST 2670
ASST 2680
ASST 2690
ASST 2700
ASST 2710
ASST 2720
ASST 2730
ASST 2740
ASST 2750
ASST 2760
ASST 2770
ASST 2780
ASST 2790
ASST 2800
ASST 2810
ASST 2820
ASST 2830
ASST 2840
ASST 2850
ASST 2860
ASST 2870
ASST 2880
ASST 2890
ASST 2900
ASST 2910
ASST 2920
ASST 2930
ASST 2940
ASST 2950
ASST 2960
ASST 2970
ASST 2980
ASST 2990
ASST 3000
ASST 3010
ASST 3020
ASST 3030
ASST 3040
ASST 3050
ASST 3060
ASST 3070
ASST 3080
ASST 3090
ASST 3100
ASST 3110
ASST 3120
ASST 3130
ASST 3140
ASST 3150
ASST 3160
ASST 3170
ASST 3180
ASST 3190
ASST 3200
ASST 3210
ASST 3220
ASST 3230
ASST 3240
ASST 3250
ASST 3260
ASST 3270
ASST 3280
ASST 3290
ASST 3300
ASST 3310
ASST 3320
ASST 3330
ASST 3340
ASST 3350
ASST 3360
ASST 3370
ASST 3380
ASST 3390
ASST 3400
ASST 3410
ASST 3420
ASST 3430
ASST 3440
ASST 3450
ASST 3460
ASST 3470
ASST 3480
ASST 3490
ASST 3500
ASST 3510
ASST 3520
ASST 3530
ASST 3540
ASST 3550
ASST 3560
ASST 3570
ASST 3580
ASST 3590
ASST 3600
ASST 3610
ASST 3620
ASST 3630
ASST 3640
ASST 3650
ASST 3660
ASST 3670
ASST 3680
ASST 3690
ASST 3700
ASST 3710
ASST 3720
ASST 3730
ASST 3740
ASST 3750
ASST 3760
ASST 3770
ASST 3780
ASST 3790
ASST 3800
ASST 3810
ASST 3820
ASST 3830
ASST 3840
ASST 3850
ASST 3860
ASST 3870
ASST 3880
ASST 3890
ASST 3900
ASST 3910
ASST 3920
ASST 3930
ASST 3940
ASST 3950
AS

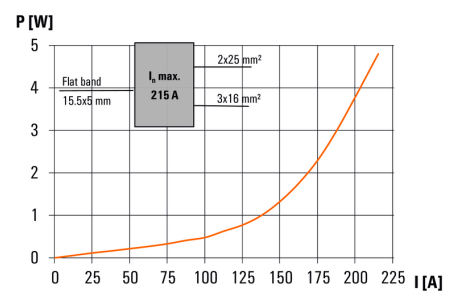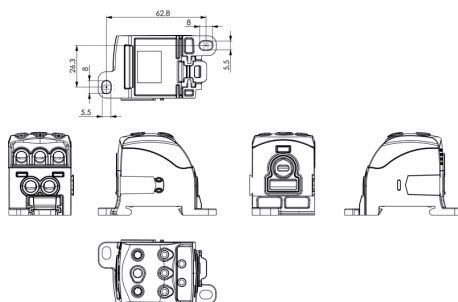

Power distribution


Screw connection

W-Series


WPD 106 1X70/2X25+3X16 GY



WPD 106

70 mm²


output



input

Width / Height / Depth	mm
max. current / max. conductor	A/mm ²
max. clamping range	mm ²

39.5 / 50.4 / 70
192 / 70
10...70



Technical data

Rated data		
Rated voltage		V
Rated current		A
for wire cross-section	70 mm ²	mm ²
Rated impulse withstand voltage / Pollution severity		
Overvoltage category / UL 94 flammability rating		
Approvals		
Clamped conductors (H05V/H07V)		
Solid / Stranded	70 mm ²	mm ²
	25 mm ²	mm ²
	16 mm ²	mm ²
	70 mm ²	mm ²
Flexible with ferrule	25 mm ²	mm ²
	16 mm ²	mm ²
	70 mm ²	mm/-
	25 mm ²	mm/-
Stripping length / Blade size	16 mm ²	mm/-
	70 mm ²	mm/-
Tightening torque		Nm
Note		

IEC 60947-7-1 (Cu), UL 1059 (Cu+Al)

IEC	UL	CSA	EN 60079-7
1000	600	600	550
192	160	175	160
70	AWG 10...2/0	AWG 10...2/0	70
	8 kV / 3		
	III / V-0		

Rated connection

10...70 / 10...70
2.5...25 / 2.5...25
1.5...16 / 1.5...16
6...50
1.5...16
1.5...10
19 / M8
14 / M6
12 / M6

see appendix at the end of the chapter

Ordering data

Version	
	grey
	blue
	red
	black

Note

Type	Qty.	Order No.
WPD 106 1x70/2x25+3x16 GY	1	1562210000
WPD 106 1x70/2x25+3x16 BL	1	2518570000
WPD 106 1x70/2x25+3x16 RD	1	2725340000
WPD 106 1x70/2x25+3x16 BK	1	2725440000

Accessories

Cross connection	
	2-pole
End bracket	
	dark beige
	dark beige
Screwdriver	
	SET


Type	Qty.	Order No.
WQB WPD X06/2	20	1561940000
WEW 35/2	100	1061200000
AEB 35 SC/1	50	1991920000

SDK PZ2 X 100	1	2749450000
SK WSD-S 1,5-10,0	1	9008850000

Conductor connection data according to IEC 60947-7-1 (Cu), UL 1059 (Cu+Al)

Input	connection point A				CP** B
	Copper		Aluminium*		Copper
					
70 mm ²	10 Nm	10 Nm	13,6 Nm	13,6 Nm	
50 mm ²					
35 mm ²					
25 mm ²					
16 mm ²					
10 mm ²					
6 mm ²					
Flat band 15,5x5 mm					2 Nm
Stripping lengths	19 mm				17 mm
Allen screw	M8				M5

* Values according to UL 1059 ** CP - connection point

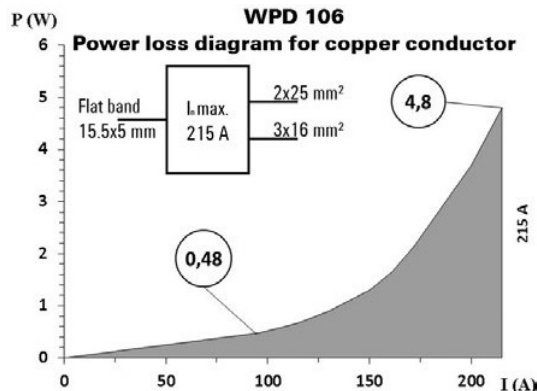

Output	connection point 1/2/3				connection point 4/5			
	Copper		Aluminium*		Copper		Aluminium*	
								
25 mm ²	2 Nm			2,5 Nm				
16 mm ²								
10 mm ²		2 Nm	5,1 Nm		2,5 Nm	5,1 Nm	5,1 Nm	
6 mm ²								
4 mm ²								
2.5 mm ²								
1.5 mm ²								
Stripping lengths	12 mm			14 mm				
Allen screw	M6			M6				
* Values according to UL 1059								

* Values according to UL 1059

 Mehrdrähtig
  Eindrätig
  Feindrätig mit Aderendhülse
  Sektorförmig
  Flachband

UL Rating data according to UL 1059

Certificate no. (UR)	XCFR2.E60693				CP** B
	connection point A		Aluminium		Copper
Input (line)	Copper		Aluminium		Copper
					
AWG 2/0	88.5 Lb In.	88.5 Lb In.	120.4 Lb In.	100 Lb In.	
AWG 1/0					
AWG 2					
AWG 4					
AWG 6					
AWG 8					
AWG10					
Flat band 15.5x3.2 mm					17.4 Lb In.
max. current	160 A	150 A	135 A	120 A	160 A
Voltage size B,C (UR)	600 V				

** CP - connection point

CSA rating data according to CSA 22.2 No. 158

Certificate No. (CSA)	269832		
	Input	Output	
	CP* A	CP* 1/2/3	CP* 4/5
AWG 2/0	10 Nm.		
AWG 1/0			
AWG 2			
AWG 4			
AWG 6			
AWG 8		2 Nm	2 Nm
AWG10			
AWG 12			
AWG 14			
AWG 16			
max. current	175 A	50 A	65 A
Voltage size C (CSA)	600 V		

* CP - connection point

output (load)	connection point 1/2/3				connection point 4/5		
	Copper		Aluminium		Copper	Aluminium	
							
AWG 4	22.6 Lb In.	22.6 Lb In.	45.1 Lb In.	45.1 Lb In.	22.6 Lb In.	22.6 Lb In.	45.1 Lb In.
AWG 6							
AWG 8							
AWG 10							
AWG 12							
AWG 14							
AWG 16							
max. current	65 A	50 A	50 A	85 A	65 A	65 A	50 A
Voltage size B,C (UR)	600 V						

 Stranded
  Solid
  Flexible with ferrule
  Sector shaped
  Flat band