


CONNECTION DIAGRAM



PROVIDED WITH SAFE TOUCH TERMINAL COVERS.
NO INTEGRAL FUSING CAPABILITY.

DIMENSIONS							APPROX.WT. LBS (KG)
	A	B	C	D	E	MTG. SLOTS	
INCHES (MM)	5.13 (130)	5.25 (133)	4.50 (114)	4.38 (111)	4.38 (111)	0.313X1.063 (8.0X27.0)	

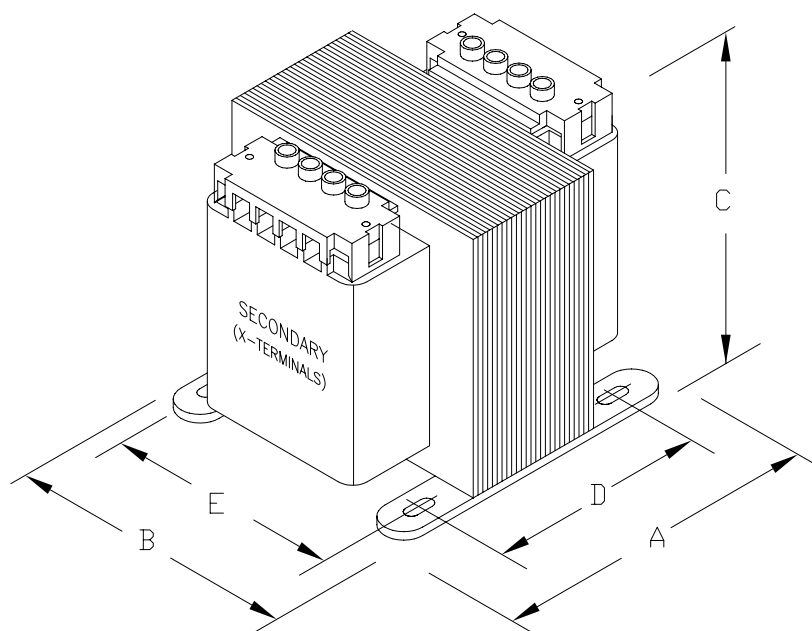

MICRON INDUSTRIES CORPORATION
777 CHURCH ROAD - ELMHURST, IL 60126
Tel. (800) 664-4660, (630) 516-1222 Fax (630) 516-1820
www.MicronTransformers.com

CAT.NO. B500-2069-GAF			CONST. ENCAPSULATED			UL LISTED
			MODEL GLOBALTRAN			
RATING						SP CERTIFIED
OUTPUT AMPS	4.55/2.27	PRIMARY V	380/400/415		TEMP. CLASS	
VA	500	SECONDARY V	110X220		130°C	REVISION G
						CE IEC 61558