

---

PRODUCT CATALOGUE

# **PMA Flexible cable protection systems**

For applications with high requirements



**PMA**

---

**PMA cable protection products from ABB can be used in an extremely wide range of applications. The list is virtually endless, including rail vehicles and infrastructure, industrial machines, electrical systems on ships, solar and wind energy generation installations, telecommunications, construction and medical equipment. Wherever cables are installed and exposed to mechanical stresses and environmental hazards. Today and tomorrow we guarantee best quality regarding products, technical support, service and delivery.**

---

# Table of contents

<b>004–007</b>	<b>Introduction</b>
<b>008–036</b>	<b>PMA conduits</b>
<b>038–049</b>	<b>PMAFIX Pro Connectors</b>
<b>050–090</b>	<b>PMAFIX Connectors IP66 IP68 (IP69)</b>
<b>091–094</b>	<b>PMAFIXPlus Connectors IP68 (IP69)</b>
<b>096–099</b>	<b>Special connectors</b>
<b>100–119</b>	<b>Accessories</b>
<b>120–127</b>	<b>PMA JUMBO sizes</b>
<b>128–133</b>	<b>PMA Divisible System</b>
<b>134–141</b>	<b>PMA Smart Line IP66</b>
<b>142–151</b>	<b>PMAJACK Plastic and metal braids</b>
<b>152–162</b>	<b>Technical annex</b>
<b>163–180</b>	<b>Index</b>
<b>181</b>	<b>Important information</b>
<b>182</b>	<b>Further information</b>

---

# Introduction

## A swiss manufacturer with a global presence

There is no better reference than satisfied customers. PMA cable protection provides customized specific solutions for customers worldwide.

ABB's PMA manufacturing site is located in Uster (Switzerland), close to Zurich. The majority of what we produce for the world market is made at this location. Also our research and development department is located here.

ABB is focused on providing solutions that address the critical issues in every area of operations, allowing customers to focus on plant sustainability, cost, quality, flexibility, safety and regulatory challenges.

Thanks of our large network of professional partners in all of the major industrialised countries around the globe, we are able to guarantee best quality regarding products, technical support, service and fast delivery.





#### Setting new standards and trends

Customer needs are a top priority at ABB, and we work every day to ensure all our customer requirements are met in our products. We offer cable protection solutions and services that are tailored to meet requirements in every type of application. Our range extends from basic items right up to the most demanding high-tech products. We can develop system solutions and special products that are designed to meet specific customer requirements. Our intensive research and development activities, which include the field of new materials, are a major reason why PMA products from ABB continues to set new standards and trends in the cable protection marketplace. These efforts together with excellent quality and service have helped us build up an outstanding reputation with leading corporations around the world.

#### From pioneer to market leader

ABB has been developing, producing, and selling top-quality PMA cable protection systems since 1975. Our high-quality Swiss products have rapidly earned us an excellent reputation worldwide and established us as the market leader. Our range of more than 6,500 products gives customers the protection they need in railway, mechanical engineering, and shipbuilding applications worldwide. PMA products are also the solution of choice in automation, building installations and other projects where power and data cables require dependable protection.

#### Unique benefits of PMA products from ABB

Service to the customer is what motivates us. In addition to series production, PMA can build fittings and conduits to meet individual requirements as a special service to our customers.

- A safe, reliable system that is easy to install
- Vibration-proof connections
- System connection strength
- Ingress protection conforming to recognized test methods
- High impact strength even at low temperatures
- High compression strength (peak load)
- Long-term reversed-bending resistance
- Good chemical resistance
- Fire protection (flammability and smoke generation)
- Good weather resistance
- Long wearing
- ...and much more

## Introduction

### Areas of applications



#### Mechanical engineering

A considerable number of PMA cable protection systems are used in mechanical engineering. A few examples illustrate how varied the range of mechanical engineering applications is. You will find our products in machine tools, packaging machines, printing machines, as well as heating, ventilation, conveyer, and filling systems. PMA products also make a vital contribution to the smooth operation of high voltage and emergency power systems, can production machinery and woodworking machines, etc. PMA cable protection solutions safeguard cables, wires and data links against heat, cold, tensile stress, pressure stress, and other external influences in the important mechanical engineering industry.

#### Rail vehicles/Rail infrastructure

PMA products from ABB have proven their dependability in railway construction projects around the world. This is the reason why large corporations including Siemens, Alstom, Bombardier, PESA, CSR/CNR, Deutsche Bahn, and SNCF have chosen us as supplier over a period of many years. Our special railway engineering product line provides protection and safety on signalling systems, couplings, trucks, and gangways, as well as roof, and underfloor equipment.

The range of applications is very extensive. PMA products contribute to the safe operation of trams, locomotives, freight cars, high-speed trains, and even roller coasters.

#### Worldwide recognitions

All PMA products are rigorously tried and tested to meet the demands of industry worldwide.



**Automation/Robotics**


In the field of automation, there is a need for products that can withstand the stress of motion-intensive applications. Solutions developed by ABB for the automation industry fully meet these requirements. Special conduit designs, supports and abrasion protection sleeves provide optimal protection along the entire length of all moving elements, enabling engineers to achieve a massive reduction in torsional forces. There is good reason why leading robotics manufacturers rely on ABB technology.

**Countless applications**

PMA cable protection products from ABB can be used in an extremely wide range of applications. The list is virtually endless and includes industries such as telecommunications, construction equipment and medical equipment. Wherever there is a need for cable protection, the PMA product portfolio provides safe, dependable, forward-looking solutions or will develop them specially for you to meet your individual needs.

# PMA conduits

## Conduit guide

Products				PMAFLEX Pro			PMAFLEX						
Application areas				PHT	POH	PSX	CYL	ESD	PCL	PCS	PCSL	PEL	PI5/PIH
<b>Machine building</b> 	General applications	static				●		●					
		dynamic	●			●		●				●	
	Heavy loads	static											
		dynamic								●			
	Outdoor applications	static								●	●		●
		dynamic								●	●		●
	Antistatic requirements	static						●					
		dynamic						●					
<b>Traction vehicles</b> 	Outdoor applications with sunlight exposure	static							●	●		●	
		dynamic								●	●		●
	Outdoor applications	static	●							●	●		●
		dynamic	●							●	●		●
	Indoor applications	static		●									
<b>Rail infrastructure</b> 	Outdoor applications with sunlight exposure	static							●	●			
	Indoor and tunnel applications	static		●									
<b>Automation/ Robotics</b> 	Moving systems	dynamic	●			●		●	●	●		●	
	Systems with extreme movements	dynamic										●	
	Moving systems with antistatic requirements	dynamic					●						
<b>Ship + Off-shore</b> 	Outdoor general applications	static							●	●		●	
		dynamic	●							●	●		●
	Indoor applications	static				●		●		●	●		●
		dynamic				●		●		●	●		●
	Passenger area	static		●		●		●					
<b>Energy</b> 	Outdoor applications with sunlight exposure	static							●	●			
	Indoor applications	static		●		●		●				●	
	Exposed to radiation	static				●							
<b>Food &amp; Beverage</b> 	General applications	static											
		dynamic											
<b>Others</b>     	Vehicle building	static	●										
	Telecommunications	indoor					●		●			●	
		outdoor											
	Building constructions	indoor		●									
		outdoor									●		
	Ex hazardous areas (ATEX, IECEx)	static						●					
	High temperature applications	static	●			●							







---

# PMA conduits

## Overview

Conduits to protect cables. We offer many different conduit types for diverse applications with various technical requirements.

The product groups:

- PMAFLEX Pro
- PMAFLEX
- PMAFLEX Plus
- PMAFLEX Multilayer
- PMA Divisible System
- PMA Smart Line
- PMA overbraided
- PMA overextruded

Conduit sizes range from 6mm to 125mm Ø, from lightweight to heavyweight, and from pliable to highly flexible. PMA also offers slit and divisible conduits. Standard colours are black and grey.

Many conduits are specially approved, e.g. CSA, UL Recognition, DNV, Lloyds, Bureau Veritas etc. All conduits are REACH and RoHS compliant.



---

**PMA CONDUITS**


PMA offers a large range of very different mono- and multilayer conduit types which fulfill high technical demands to protect humans and cables.




## PMA conduits

### Part number codes

For part number explanation only, not to be used as a configuration tool.

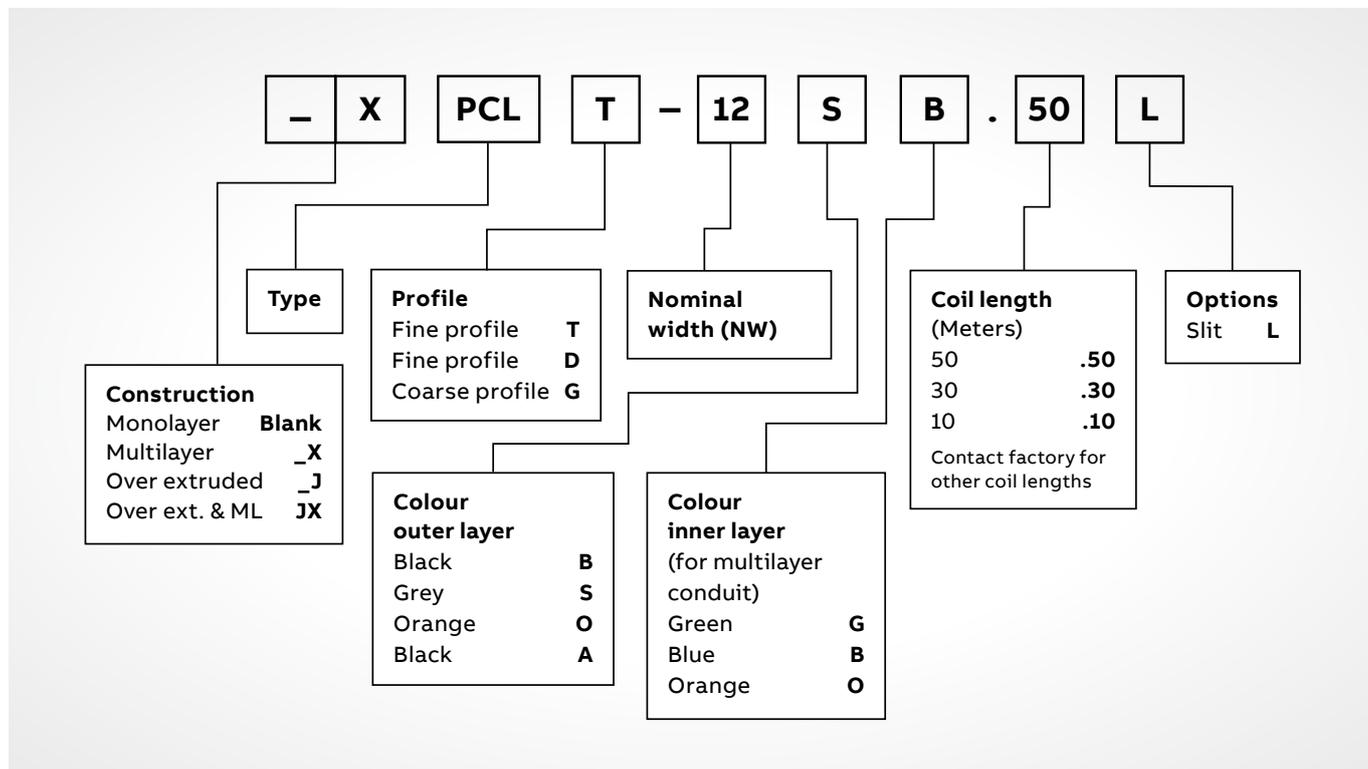


#### Radius

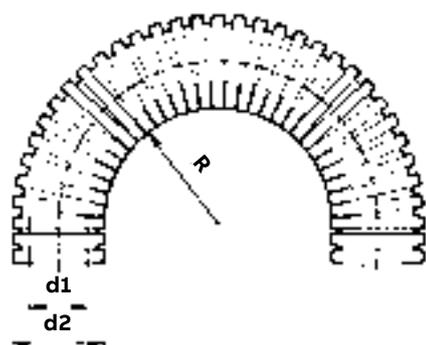

**Stat. radius** = Lowest recommended bending radius for static (fixed) installation.

**Dyn. radius** = Lowest recommended bending radius for dynamic (flexible) installation.

#### Profile

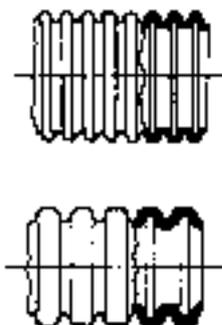

**Fine profile T**  
Tight bending radius.

**Coarse profile G**  
High pull-out strength.

## PMAFLEX Pro

### Type PHT & POH conduit

#### Type PHT - Highly flexible, medium/heavy-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	PHTT-07B	07	10	6.2	10.0	15/40	50
	PHTT-10B	10	12	9.6	13.0	20/55	50
	PHTT-12B	12	16	12.0	15.8	30/65	50
	PHTT-17B	17	20	16.2	21.2	40/70	50
	PHTT-23B	23	25	22.6	28.5	45/95	50
	PHTG-17B	17	20	15.2	21.2	40/75	50
	PHTG-23B	23	25	22.0	28.5	45/100	50
	PHTG-29B	29	32	27.7	34.5	55/120	50
	PHTG-36B	36	40	35.8	42.5	60/180	30
	PHTG-48B	48	50	46.8	54.5	70/200	30

#### PHT Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance (PHTT-17B)	
Compression resistance (PHTG-17B)	
Low temperature performance	
Weathering resistance	

For applications at high and very low temperatures / dynamic applications  
Specially formulated polyamide elastomer. Both excellent flexibility and high compression strength  
Enhanced temperature range compared to standard polyamides  
High resistance to ultra violet rays and weathering

Materials	Temperature range	Colour
Specially formulated polyamide elastomer	-50°C to +135°C	Black
Certification	Short-term to: +180°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Impact resistance	High
	Extremely good at low temperatures	

#### Type POH - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	POHT-10B	POHT-10S	10	12	9.2	13.0	13.0	50
	POHT-12B	POHT-12S	12	16	11.8	15.8	15.8	50
	POHG-17B	POHG-17S	17	20	15.7	21.2	21.2	50
	POHG-23B	POHG-23S	23	25	22.0	28.5	28.5	50
	POHG-29B	POHG-29S	29	32	27.4	34.4	34.4	50
	POHG-36B	POHG-36S	36	40	35.8	42.4	42.4	30
	POHG-48B	POHG-48S	48	50	46.8	54.4	54.5	30

#### POH Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For highest fire and passenger safety requirements  
Excellent fire safety characteristics acc. to BS 6853 1a (interior)  
Good ductility and reversed bending characteristics

Materials	Temperature range	Colour
Specially modified polypropylene	-25°C to +95°C	Black/Grey
Certification	Short-term to: +120°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Fire performance	-
	acc. to BS 6853 1a (interior)	

# PMAFLEX Pro

## Type PSX conduit

Type PSX - Flexible, light-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PSXT-10B	10	12	9.8	13.0	20	50
	PSXT-12B	12	16	12.2	15.8	30	50
	PSXT-17B	17	20	16.2	21.2	35	50
	PSXG-23B	23	25	22.3	28.5	45	50
	PSXG-29B	29	32	28.0	34.5	55	50
	PSXG-36B	36	40	36.5	42.5	60	30
	PSXG-48B	48	50	47.5	54.5	70	30

For applications with highest fire safety performance requirements / with extreme temperature conditions / exposed to radiation.  
 Chemical resistance: To oils, fats, acids, alcohols and hot water (good resistance to hydrolysis)

Excellent high and low temperature properties

High radiation resistance

Very good ductility

### PSX Index

min.	max.
Ductility	████████████████████
Fatigue reversed bending	████████████████████
Compression resistance	████████████████████
Low temperature performance	████████████████████
Weathering resistance	████████████████████

Materials	Temperature range	Colour
Specially modified polyetherimide	-100°C to +170°C	Black
Certification	Short-term to: +200°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Low smoke density and toxicity	-

# PMAFLEX

## Type CYL & ESD conduit

### Type CYL - Very flexible, medium-duty conduit

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	CYLT-07B	CYLT-07S	07	10	6.2	10.0	15	50
	CYLT-10B	CYLT-10S	10	12	9.6	13.0	20	50
	CYLT-12B	CYLT-12S	12	16	12.0	15.8	30	50
	CYLT-17B	CYLT-17S	17	20	16.2	21.2	40	50
	CYLT-23B	CYLT-23S	23	25	22.6	28.5	45	50
	CYLT-29B	CYLT-29S	29	32	29.0	34.5	55	50
	CYLT-36B	CYLT-36S	36	40	36.5	42.5	60	30
	CYLT-48B	CYLT-48S	48	50	47.5	54.5	70	30
	CYLG-23B	CYLG-23S	23	25	21.9	28.5	45	50
	CYLG-29B	CYLG-29S	29	32	27.6	34.5	55	50
	CYLG-36B	CYLG-36S	36	40	36.0	42.5	60	30
	CYLG-48B	CYLG-48S	48	50	47.0	54.5	70	30
	CYLG-56B	CYLG-56S	56	68	56.3	67.2	120	30
	CYLG-70B	CYLG-70S	70	80	68.0	80.0	160	10
	CYLG-95B	CYLG-95S	95	106	91.9	106.0	210	10
	CYLG-125B	CYLG-125S	125	146	126.5	146.5	450	06

**Approvals**



**CYL Index**

<b>min.</b>	<b>max.</b>
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building and installation industries / static and slightly dynamic applications  
 Very good ductility and good reversed bending characteristics  
 Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Self extinguishing	UV Resistance
	acc. to UL 94 V2	-

### Type ESD - Very flexible, medium-duty conduit

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	ESDT-07B	07	10	6.2	10.0	15/40	50
	ESDT-10B	10	12	9.6	13.0	20/50	50
	ESDT-12B	12	16	12.0	15.8	30/70	50
	ESDT-17B	17	20	16.4	21.1	40/75	50
	ESDT-23B	23	25	22.6	28.4	45/90	50
	ESDT-29B	29	32	29.0	34.3	55/110	50
	ESDT-36B	36	40	36.5	42.5	60/160	30
	ESDT-48B	48	50	47.5	54.5	70/200	30
	ESDG-56B	56	68	56.5	67.0	110/250	30
	ESDG-70B	70	80	67.5	80.0	150/330	10
	ESDG-95B	95	106	91.5	106.0	170/440	10

**ESD Index**

<b>min.</b>	<b>max.</b>
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For dynamic applications in robotics and automation where electrostatic charge and uncontrolled discharge need to be avoided  
 Prevents electrostatic charging. For indoor and outdoor use (very good cold temperature performance)

Materials	Temperature range	Colour
Specially modified polyamide 12	-40°C to +90°C	Black
Certification	Short-term to: +150°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	Excellent fatigue resistance	Excellent

# PMAFLEX

## Type PCL conduit

Type PCL - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	PCLT-07B	PCLT-07S	07	10	6.2	10.0	15	50
	PCLT-10B	PCLT-10S	10	12	9.6	13.0	20	50
	PCLT-12B	PCLT-12S	12	16	12.0	15.8	30	50
	PCLT-17B	PCLT-17S	17	20	16.2	21.2	40	50
	PCLT-23B	PCLT-23S	23	25	22.6	28.5	45	50
	PCLT-29B	PCLT-29S	29	32	29.0	34.5	55	50
	PCLT-36B	PCLT-36S	36	40	36.5	42.5	60	30
	PCLT-48B	PCLT-48S	48	50	47.5	54.5	70	30
	PCLG-17B	PCLG-17S	17	20	15.3	21.2	40	50
	PCLG-23B	PCLG-23S	23	25	21.9	28.5	45	50
	PCLG-29B	PCLG-29S	29	32	27.6	34.5	55	50
	PCLG-36B	PCLG-36S	36	40	36.0	42.5	60	30
	PCLG-48B	PCLG-48S	48	50	47.0	54.5	70	30
	PCLG-56B	PCLG-56S	56	68	56.3	67.2	130	30
	PCLG-70B	PCLG-70S	70	80	67.5	80.0	160	10
	PCLG-95B	PCLG-95S	95	106	91.5	106.0	210	10
PCLG-125B	PCLG-125S	125	146	126.5	146.5	450	6	

**Approvals**



**PCL Index**

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building, installation and vehicle building industries / static and slightly dynamic applications  
 Very good ductility and good reversed bending characteristics. Very good long-term properties  
 Very good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Materials	Temperature range	Colour
Specially formulated polyamide 6	-50°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Self extinguishing	acc. to UL 94 V2

# PMAFLEX

## Type PCS & PCSL conduit

### Type PCS - Very flexible, heavy-duty conduit

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
			NW	Metric				
	PCST-07B	PCST-07S	07	10	6.0	10.0	15/40	100
	PCST-10B	PCST-10S	10	12	9.2	13.0	20/50	50
	PCST-12B	PCST-12S	12	16	11.8	15.8	25/70	50
	PCST-17B	PCST-17S	17	20	16.0	21.2	35/80	50
	PCSG-17B	PCSG-17S	17	20	15.2	21.2	35/85	50
	PCSG-23B	PCSG-23S	23	25	21.5	28.5	40/110	50
	PCSG-29B	PCSG-29S	29	32	27.7	34.4	50/130	50
	PCSG-36B	PCSG-36S	36	40	35.8	42.4	60/180	30
	PCSG-48B	PCSG-48S	48	50	46.8	54.4	70/220	30
	PCSG-56B	PCSG-56S	56	68	56.1	67.2	130/280	30
	PCSG-70B	PCSG-70S	70	80	66.5	80.0	170/360	10
	PCSG-95B	PCSG-95S	95	106	91.0	106.0	250/470	10

For dynamic outside applications in railway vehicles / outdoor applications with highest requirements to UV and weathering resistance  
Extensive railway approvals. Very good ductility and good reversed bending characteristics


Very good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Highest reversed bending resistance

Excellent resistance to ultra violet rays and weathering

EN45545-2 HL2 (R22 +R23)

#### PCS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black/Grey
Certification	Short-term to: +150°C	Fatigue resistance
Free from halogens, REACH compliant and RoHS compliant	Excellent fatigue resistance	UV Resistance
		Excellent

### Type PCSL - Highly flexible, medium-duty conduit

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
			NW	Metric				
	PCSLT-07B	PCSLT-07S	07	10	6.2	10.0	15/40	50
	PCSLT-10B	PCSLT-10S	10	12	9.6	13.0	20/50	50
	PCSLT-12B	PCSLT-12S	12	16	11.9	15.8	25/65	50
	PCSLT-17B	PCSLT-17S	17	20	16.4	21.1	30/65	50
	PCSLG-17B	PCSLG-17S	17	20	15.2	21.1	30/80	50
	PCSLG-23B	PCSLG-23S	23	25	21.7	28.4	40/100	50
	PCSLG-29B	PCSLG-29S	29	32	27.4	34.3	50/120	50
	PCSLG-36B	PCSLG-36S	36	40	35.8	42.3	60/180	30
	PCSLG-48B	PCSLG-48S	48	50	46.7	54.2	70/200	30

For dynamic outside applications in railway vehicles / outdoor applications with highest requirements to UV and weathering resistance

Extensive railway approvals. Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

Excellent reversed bending resistance

Excellent resistance to ultra violet rays and weathering

EN45545-2 HL2 (R22 +R23)

#### PCSL Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black
Certification	Short-term to: +150°C	Fatigue resistance
Free from halogens, REACH compliant and RoHS compliant	Excellent fatigue resistance	UV Resistance
		Excellent

# PMAFLEX

## Type PEL & PIS/PIH conduit

### Type PEL - Highly flexible, light-duty, soft

	Order no. (grey)	Order no. (grey, slit)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	PELT-10S	PELT-10SL	10	12	9.7	12.7	20	50
	PELT-12S	PELT-12SL	12	16	11.5	15.5	30	50
	PELT-17S	PELT-17SL	17	20	16.0	20.9	35	50
	PELT-23S	PELT-23SL	23	25	22.5	27.5	40	50
	PELT-29S	PELT-29SL	29	32	28.5	33.8	50	30
	PELT-36S	PELT-36SL	36	40	34.0	41.6	60	30
	PELT-48S	PELT-48SL	48	50	47.0	53.2	70	30

For electrical cabinets and appliance construction

Very good ductility

Suitable for small bending radii

Good resistance against strong acids and bases

#### PEL Index

min. max.

Ductility

Fatigue reversed bending

Compression resistance

Low temperature performance

Weathering resistance

Materials	Temperature range	Colour
Specially modified polyethylene	-50°C to +60°C	Grey
Certification	UV Resistance	
Free from halogens, REACH compliant and RoHS compliant		-

### Type PIS/PIH - Highly flexible, medium- and heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./dyn. radius (mm)	PU (m)
			NW	Metric				
	PIST-07B	PIST-07S	07	10	6.2	10.0	15/40	50
	PIST-10B	PIST-10S	10	12	9.6	13.0	20/50	50
	PIST-12B	PIST-12S	12	16	11.9	15.8	25/65	50
	PIST-17B	PIST-17S	17	20	16.4	21.1	30/65	50
	PIST-23B	PIST-23S	23	25	22.6	28.4	35/90	50
	PIST-29B	PIST-29S	29	32	29.0	34.3	45/110	50
	PIST-36B	PIST-36S	36	40	36.5	42.5	60/165	30
	PIST-48B	PIST-48S	48	50	47.5	54.5	70/180	30
	PISG-17B	PISG-17S	17	20	15.2	21.1	30/80	50
	PISG-23B	PISG-23S	23	25	21.7	28.4	40/100	50
	PISG-29B	PISG-29S	29	32	27.9	34.7	50/120	50
	PISG-36B	PISG-36S	36	40	35.8	42.3	60/180	30
	PISG-48B	PISG-48S	48	50	46.7	54.2	70/200	30
	PIHG-56B	PIHG-56S	56	68	56.3	67.2	110/270	30
	PIHG-70B	PIHG-70S	70	80	67.2	79.6	150/350	30
	PIHG-95B	PIHG-95S	95	106	91.3	106.0	170/450	30
	PIHG-125B	PIHG-125S	125	146	126.5	146.5	350/480	20

For robotics and automation applications. UL 94 V0. Excellent UV resistance and weathering characteristics

PIS: Medium-wall (Nominal width 07 to 48) / PIH: Heavy-wall (Nominal width 56 to 125)

Very good reversed bending characteristics. Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

#### Approvals



#### PIS/PIH Index

min. max.

Ductility

Fatigue reversed bending

Compression resistance

Low temperature performance

Weathering resistance

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black/Grey
Certification	Weathering characteristics	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Short-term to: +150°C Excellent	Excellent

# PMAFLEX

## Type POS & PUE conduit

### Type POS - Highly flexible, medium-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	POST-10B	10	12	9.6	13	20/50	50
	POST-12B	12	16	11.9	15.8	30/70	50
	POST-17B	17	20	16.2	21.2	35/75	50
	POST-23B	23	25	22.6	28.5	40/100	50
	POST-29B	29	32	29	34.5	50/120	50
	POST-36B	36	40	36.5	42.5	60/180	30
	POST-48B	48	50	47.5	54.5	70/195	30
	POSG-29B	29	32	27.6	34.5	50/120	50
	POSG-36B	36	40	36	42.5	60/180	30
	POSG-48B	48	50	47	54.5	70/195	30
	POSG-70B	70	80	67.2	79.6	150/350	30
	POSG-95B	95	106	91.3	106	170/450	30

#### POS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For automation as well as for machine building and industrial installations, especially where continuous movements occur  
Excellent reversed bending performance and flexibility  
Good impact resistance. Good resistance against strong acids

Materials	Temperature range	Colour
Specially modified polypropylene	-25°C to +95°C	Black
Certification	Short-term to: +130°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	-

### Type PUE - Highly flexible, medium-duty

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m)
		NW	Metric				
	PUET-23B	23	25	22.4	28.5	35/70	50
	PUET-29B	29	32	28.8	34.5	40/90	30
	PUET-36B	36	40	35.8	42.4	50/120	30
	PUET-48B	48	50	48.6	54.5	60/130	21
	PUEG-56B	56	68	56.3	67.2	90/170	30
	PUEG-70B	70	80	68.2	80.5	100/220	30

#### PUE Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	


For robotic applications with multi-axial movements  
Specially suitable for tight bending-radii  
Highest reversed bending resistance  
Excellent chafing characteristics

Materials	Temperature range	Colour
Specially formulated polyurethane	-60°C to +50°C	Black
Certification		
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	-

# PMAFLEX

## Type PVD & VAM conduit

### Type PVD - Pliable, medium-duty

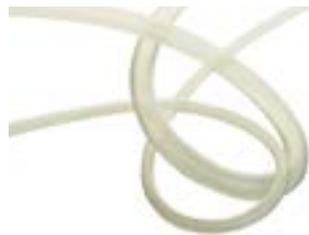	Order no. (transparent)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PVDT-10P	10	12	9.5	12.6	20	50
	PVDT-12P	12	16	11.8	15.5	30	50
	PVDT-17P	17	20	16.0	20.8	40	50
	PVDT-23P	23	25	22.6	28.0	45	50
	PVDT-29P	29	32	29.0	34.1	50	50

For long-term high temperature requirements in machine building applications  
 Excellent chemical resistance also at high temperatures  
 Very good abrasion resistance  
 High stiffness

#### PVD Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially formulated PVDF	-60°C to +150°C	Transparent
Certification	Fire performance	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing / free from cadmium	Excellent

### Type VAM - Flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VAMT-10B	VAMT-10S	10	12	9.2	13.0	25	50
	VAMT-12B	VAMT-12S	12	16	11.8	15.8	30	50
	VAMG-17B	VAMG-17S	17	20	15.2	21.2	40	50
	VAMG-23B	VAMG-23S	23	25	22.0	28.5	50	50
	VAMG-29B	VAMG-29S	29	32	27.7	34.4	60	50
	VAMG-36B	VAMG-36S	36	40	35.8	42.4	70	30
	VAMG-48B	VAMG-48S	48	50	46.8	54.4	80	30

For high fire and passenger safety requirements in interior applications such as passenger areas or public buildings  
 HL3 acc. to EN 45545-2  
 NFPA 130 compliant  
 High impact and compression strength  
 High stiffness

#### VAM Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Fire performance	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Short-term to: +160°C Minimal development of smoke and gases	-

# PMAFLEX

## Type VAML & VCS conduit

### Type VAML - Flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VAMLT-10B	VAMLT-10S	10	12	9.6	13.0	20	50
	VAMLT-12B	VAMLT-12S	12	16	12.0	15.8	30	50
	VAMLG-17B	VAMLG-17S	17	20	15.3	21.2	40	50
	VAMLG-23B	VAMLG-23S	23	25	22.6	28.5	45	50
	VAMLG-29B	VAMLG-29S	29	32	27.6	34.5	55	50
	VAMLG-36B	VAMLG-36S	36	40	36.0	42.5	65	30
	VAMLG-48B	VAMLG-48S	48	50	47.0	54.5	75	30
	VAMLG-56B	VAMLG-56S	56	68	56.3	67.2	140	30
	VAMLG-70B	VAMLG-70S	70	80	67.5	80.0	160	10
	VAMLG-95B	VAMLG-95S	95	106	91.5	106.0	210	10
	VAMLG-125B	VAMLG-125S	125	146	126.0	146.5	450	6

#### VAML Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For high fire and passenger safety requirements in interior applications such as passenger areas or public buildings  
 HL3 acc. to EN 45545-2  
 NFPA 130 compliant  
 Good flexibility. Good impact strength

Materials	Temperature range	Colour
Specially formulated polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Minimal development of smoke and gases	-

### Type VCS - Flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	VCST-07B	VCST-07S	07	10	6.0	10.0	20	100
	VCST-10B	VCST-10S	10	12	9.2	13.0	25	50
	VCST-12B	VCST-12S	12	16	11.8	15.8	30	50
	VCST-17B	VCST-17S	17	20	16.0	21.2	40	50
	VCSG-17B	VCSG-17S	17	20	15.2	21.2	40	50
	VCSG-23B	VCSG-23S	23	25	22.0	28.5	50	50
	VCSG-29B	VCSG-29S	29	32	27.7	34.4	60	50
	VCSG-36B	VCSG-36S	36	40	35.8	42.4	70	30
	VCSG-48B	VCSG-48S	48	50	46.8	54.4	80	30
	VCSG-56B	VCSG-56S	56	68	56.1	67.2	150	30
	VCSG-70B	VCSG-70S	70	80	66.5	80.0	200	10
	VCSG-95B	VCSG-95S	95	106	91.0	106.0	300	10

#### VCS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For static external installations  
 High compression and impact strengths at low temperatures and low humidity  
 Good ductility. Very good resistance to ultra violet rays and weathering

Materials	Temperature range	Colour
Specially formulated polyamide 6	-50°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fatigue resistance	UV Resistance
	-	Very good

# PMAFLEX

## Type VOH & PLR conduit

### Type VOH - Pliable, very heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	VOHD-07B	VOHD-07S	07	10		5.8	10.0	30	50
	VOHD-10B	VOHD-10S	10	12		9.0	13.0	35	50
	VOHD-12B	VOHD-12S	12	16		11.6	15.8	40	50
	VOHG-17B	VOHG-17S	17	20		14.5	21.0	60	50
	VOHG-23B	VOHG-23S	23	25		21.1	28.5	70	50
	VOHG-29B	VOHG-29S	29	32		26.6	34.5	80	50
	VOHG-36B	VOHG-36S	36	40		35.0	42.5	90	30
	VOHG-48B	VOHG-48S	48	50		46.5	54.5	100	30
	VOHG-56B	VOHG-56S	56	68		55.5	67.2	135	10
	VOHG-70B	VOHG-70S	70	80		67.0	80.0	200	10
	VOHG-95B	VOHG-95S	95	106		90.5	106.0	300	10
	VOHG-125B	VOHG-125S	125	146		126.0	146.5	480	6

For applications in heavy machine and plant construction  
 High compression resistance  
 Highest degree of mechanical protection  
 Very good UV and weathering resistance  
 Good fire safety characteristics

#### VOH Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Good	Very good

### Type PLR - flexible, medium-wall

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	PLRT-07B	PLRT-07S	07	10	T	6.2	10.0	15	50
	PLRT-10B	PLRT-10S	10	12	T	9.6	13.0	20	50
	PLRT-12B	PLRT-12S	12	16	T	12.0	15.8	30	50
	PLRG-17B	PLRG-17S	17	20	G	15.8	21.2	40	50
	PLRG-23B	PLRG-23S	23	25	G	21.9	28.5	45	50
	PLRG-29B	PLRG-29S	29	32	G	27.6	34.5	55	50
	PLRG-36B	PLRG-36S	36	40	G	36.0	42.5	60	30
	PLRG-48B	PLRG-48S	48	50	G	47.0	54.5	70	30

In light rail rolling stock applications e.g. Tram, Metro, Monorail  
 HL2 acc. to EN 45545-2  
 Good pressure resistance  
 Very good fire safety characteristics

#### PLR Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	Self-extinguishing / Very good	-

## PMAFLEX Multilayer

### Type XPCL & XSOL conduit

#### Type XPCL - Highly flexible, medium-duty

	Order no. (black/blue)	Order no. (grey/blue)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric				
	XPCLT-10BB	XPCLT-10SB	10	12	9.6	13.0	20	50
	XPCLT-12BB	XPCLT-12SB	12	16	11.8	15.6	30	50
	XPCLT-17BB	XPCLT-17SB	17	20	16.6	21.0	40	50
	XPCLG-17BB	XPCLG-17SB	17	20	15.6	20.9	40	50
	XPCLG-23BB	XPCLG-23SB	23	25	21.9	28.5	45	50
	XPCLG-29BB	XPCLG-29SB	29	32	27.6	34.5	55	50
	XPCLG-36BB	XPCLG-36SB	36	40	36.0	42.5	60	30
	XPCLG-48BB	XPCLG-48SB	48	50	47.0	54.5	70	30

For machine building and equipment with high requirements  
 Allows easy cable insertion due to low friction inner layer  
 Very good ductility and good reversed bending characteristics  
 Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

#### XPCL Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +105°C	Black/Blue
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +160°C	Grey/Blue
Compression resistance		Inner layer: Specially modified polyethylene		
Low temperature performance		Certification	Fire performance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing	-

#### Type XSOL - Highly flexible, medium-duty


	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XSOLT-10BG	10	12	9.6	13.0	25	50
	XSOLT-12BG	12	16	11.8	15.6	30	50
	XSOLG-17BG	17	20	15.2	21.0	40	50
	XSOLG-23BG	23	25	22.0	28.5	50	50
	XSOLG-29BG	29	32	27.5	34.4	60	50
	XSOLG-36BG	36	40	35.8	42.4	70	30
	XSOLG-48BG	48	50	46.8	54.4	80	30

All-purpose, especially in long-term external applications, e.g. energy technology  
 Very good resistance to UV and weathering  
 Very high ductility and reversed bending resistance  
 Very good mechanical strength  
 High impact resistance even under extreme conditions, such as low temperatures and low humidity

#### Approvals



#### XSOL Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-50°C to +95°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +150°C	
Compression resistance		Inner layer: Specially modified polyamide 6		
Low temperature performance		Certification	Fire performance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Good fire safety characteristics Self-extinguishing	Very good

## PMAFLEX Multilayer

### Type XVCS1H & XVCS2H conduit

#### Type XVCS1H - Flexible, heavy-duty

	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XVCS1H-10BG	10	12	9.2	13.0	25	50
	XVCS1H-12BG	12	16	11.7	15.5	30	50
	XVCS1H-17BG	17	20	15.2	21.0	40	50
	XVCS1H-23BG	23	25	21.7	28.4	50	50
	XVCS1H-29BG	29	32	27.5	34.3	60	50
	XVCS1H-36BG	36	40	35.8	42.2	70	30
	XVCS1H-48BG	48	50	46.8	54.3	80	30

For track side applications and other exterior static applications  
 Easy layouting through: High conduit ductility and formability / Low friction inner layer facilitates cable insertion  
 Excellent impact characteristics at low temperatures

#### XVCS1H Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +90°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +120°C	
Compression resistance		Inner layer: Specially modified polyolefin		
Low temperature performance		Certification	Atmospheric corrosion resistance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Very good	Very good

#### Type XVCS2H - Flexible, heavy-duty

	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	XVCS2H-10BG	10	12	9.2	13.0	20	50
	XVCS2H-12BG	12	16	11.7	15.5	25	50
	XVCS2H-17BG	17	20	15.2	21.0	35	50
	XVCS2H-23BG	23	25	22.0	28.4	40	50
	XVCS2H-29BG	29	32	27.7	34.3	50	50
	XVCS2H-36BG	36	40	35.8	42.2	60	30
	XVCS2H-48BG	48	50	46.8	54.3	70	30

For track side applications and other exterior static applications with high UV exposure  
 Easy layouting through: High conduit ductility and formability / Low friction inner layer facilitates cable insertion  
 Excellent impact characteristics at low temperatures

#### XVCS2H Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-50°C to +90°C	Black/Green
Fatigue reversed bending		Intermediate layer: Specially bonding compound	Short-term to: +120°C	
Compression resistance		Inner layer: Specially modified polyolefin		
Low temperature performance		Certification	Atmospheric corrosion resistance	UV Resistance
Weathering resistance		Free from halogens, REACH compliant and RoHS compliant	Excellent	Excellent

## PMAFLEX Multilayer

### Type XVCSF & XPCS conduit

#### Type XVCSF - Flexible, heavy-duty

	Order no. (black/blue)	Profile (T/G)	Conduit size		rec. fitting thread size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Weight (kg/100m)	PU (m)
			NW	Metric	PG	Metric					
	XVCSFT-10BB	T	10	12	9	M12x1.5	9.6	12.8	20	3.1	50
	XVCSFT-12BB	T	12	16	11	M16x1.5	11.9	15.6	25	4.2	50
	XVCSFG-17BB	G	17	20	16	M20x1.5	15.6	21.0	35	7.5	50
	XVCSFG-23BB	G	23	25	21	M25x1.5	21.6	28.4	45	12.0	50
	XVCSFG-29BB	G	29	32	29	M32x1.5	27.5	34.5	55	15.0	50
	XVCSFG-36BB	G	36	40	36	M40x1.5	35.7	42.4	65	19.0	30
	XVCSFG-48BB	G	48	50	48	M50x1.5	46.8	54.2	85	25.0	30

Multilayer conduit for external rail applications

Rail static external applications such as under carriage, bogie, etc.


High compression and impact strengths at low temperature and low humidity

Good flexibility and very good UV resistance and weathering characteristics

Compatible with PMAFIX Pro, PMAFIX, PMA Smart Line and accessories

EN 45545-2 HL2 (R22 & R23)

#### XVCSF Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 6	-50°C to +105°C	Black/Blue
Fatigue reversed bending		Inner layer: Specially modified polyamide 6	Short-term to: +160°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens and cadmium	Self-extinguishing	Very good
		RoHS and REACH compliant		

#### Type XPCS - Very flexible, heavy-duty

	Order no. (black/green)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (m)
		NW	Metric					
	XPCST-10BG	10	12	9.2	13.0	20	50	50
	XPCST-12BG	12	16	11.8	15.8	25	70	50
	XPCSG-17BG	17	20	15.2	21.2	35	85	50
	XPCSG-23BG	23	25	21.5	28.5	40	110	50
	XPCSG-29BG	29	32	27.7	34.4	50	130	50
	XPCSG-36BG	36	40	35.8	42.4	60	180	30
	XPCSG-48BG	48	50	46.8	54.4	70	220	30
	XPCSG-56BG.30	56	68	56.7	67.5	110	270	30
	XPCSG-70BG.30	70	80	67.5	79.0	130	320	10

For dynamic outside applications in railway vehicles

For outdoor applications with highest requirements to UV and weathering resistance


Extensive railway approvals

Good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

HL2 acc. to EN 45545-2

NFPA 130 compliant

#### XPCS Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-40°C to +95°C	Black/Green
Fatigue reversed bending		Inner layer: Specially formulated polyamide 6	Short-term to: +150°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens, REACH compliant	Self-extinguishing	Excellent
		and RoHS compliant		

## PMAFLEX Multilayer

### Type XPCSF conduit

#### Type XPCSF - Very flexible, heavy-duty



	Order no. (black/orange)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (m)
		NW	Metric					
XPCSF	XPCSFT-07BO	07	10	06	10	15	40	100
	XPCSFT-10BO	10	12	9.2	13.0	20	50	50
	XPCSFT-12BO	12	16	11.8	15.8	25	70	50
	XPCSFG-17BO	17	20	15.2	21.2	35	85	50
	XPCSFG-23BO	23	25	21.5	28.5	40	110	50
	XPCSFG-29BO	29	32	27.5	34.4	50	130	50
	XPCSFG-36BO	36	40	35.8	42.4	60	180	30
	XPCSFG-48BO	48	50	46.8	54.4	70	220	30

For dynamic outside applications in railway vehicles

For outdoor applications with highest requirements to UV and weathering resistance

Extensive railway approvals

Excellent flexibility

Very good mechanical characteristics even under extreme conditions, such as low temperatures and low humidity

HL3 acc. to EN 45545-2

#### XPCSF Index

min.	max.	Materials	Temperature range	Colour
Ductility		Outer layer: Specially formulated polyamide 12	-40°C to +95°C	Black/Orange
Fatigue reversed bending		Inner layer: Specially formulated polyamide 12	Short-term to: +150°C	
Compression resistance				
Low temperature performance				
Weathering resistance				
		Certification	Fire performance	UV Resistance
		Free from halogens, REACH compliant and RoHS compliant	Self-extinguishing	Excellent

# PMA overextruded conduits

## Type JFBD & JXPCSF conduit

### Type JFBD - Flexible, medium-duty

	Order no.	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	Dyn. radius (mm)	PU (mm)
		NW	Metric					
	JFBTD-12C01	12	16	11.8	16.0	70	100	50
	JFBDG-17C01	17	20	15.6	21.6	85	125	50
	JFBDG-23C01	23	25	21.7	28.8	110	160	50
	JFBDG-29C01	29	32	27.4	34.7	140	200	50
	JFBDG-36C01	32	40	35.8	42.7	200	260	30
	JFBDG-48C01	48	50	46.7	54.6	230	300	30

#### Approvals



Smooth easy to clean out layer  
 High reversed bending stresses  
 Excellent flexibility in combination with high strength  
 High resistance to chemicals and cleaning agents  
 For indoor food zone – non contact  
 Outer layer made from FDA compliant material  
 Corrosion free

#### JFBD Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Colour
Conduit: made from high-grade, specially formulated polyamide 12	Corrugated conduit: blue
Overextrusion: made from modified polyamide elastomer	Overextrusion: blue, translucent
Certification	UV Resistance
FDA 21 CFR / EU 10/2011 compliant outer layer material; ECOLAB certificate	-

### Type JXPCSF - Highly flexible, heavy-duty


	Order no. (black/orange)	Profile (T/G)	Conduit size		d1 (mm)	d2 (mm)	d3 (mm)	Stat. radius (mm)	Dyn. radius (mm)	Weight (kg/100m)	PU (m)
			NW	Metric							
	JXPCSFT-12BO	T	12	16	11.8	15.8	16	70	100	4.9	50
	JXPCSFG-17BO	G	17	20	15.2	21.2	21.6	85	125	8.6	50
	JXPCSFG-23BO	G	23	25	21.5	28.5	28.8	110	160	13.5	50
	JXPCSFG-29BO	G	29	32	27.7	34.4	34.8	140	200	16.7	50
	JXPCSFG-36BO	G	36	40	35.8	42.8	42.8	200	260	21.6	30
	JXPCSFG-48BO	G	48	50	46.8	54.4	54.8	230	300	29.4	30

Over-extruded conduit for rail applications designed specifically to prevent the accumulation of ice under extreme climate conditions  
 For dynamic or static external applications in railway vehicles - on the roof, between carriages and on bogies  
 Excellent flexibility. Smooth outer layer prevents accumulation of ice  
 Easy cleaning and high resistance to chemicals and cleaning agents. Compatible with PMAFIX Pro and accessories  
 EN 45545-2 HL3 (R22 & R23)

#### JXPCSF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Multi layer conduit: specially formulated polyamide 12	-50°C to +95°C	Black/Orange
Overextrusion: specially formulated polyamide 12	Short-term to: +150°C	
Certification	Fire performance	UV Resistance
Free from halogens and cadmium RoHS and REACH compliant	Self-extinguishing	Excellent

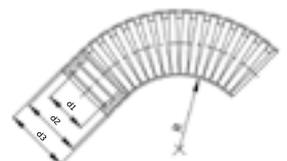

## PMA overextruded conduits


### Type JLLPA conduit

#### Type JLLPA - Flexible, heavy-duty


	Order no. (black)	Conduit size		d1 (mm)	d2 (mm)	d3 (mm)	Stat. radius (mm)	Weight (kg/100m)	PU (m)
		NW	Metric						
	JLLPA-12A	12	16	12.1	15.6	15.8	40	4.5	50
	JLLPAG-17A	17	20	15.8	21.1	21.2	55	7.4	50
	JLLPAG-23A	23	25	21.9	28.4	28.5	75	11.4	50
	JLLPAG-29A	29	32	27.8	34.5	34.7	90	15.4	50
	JLLPAG-36A	36	40	36.1	42.4	42.6	110	18.6	30
	JLLPAG-48A	48	50	46.9	54.5	54.6	140	27.4	30

Flexible, smooth over-extruded conduit for applications with cleaning requirements  
 For static applications in machine building, installation and construction industries  
 For general applications with cleaning requirements  
 Smooth outer layer for easy cleaning, good resistance to chemicals and cleaning agents. Corrosion free  
 Flexibility in combination with high strength. Compatible with PMAFIX Pro.  
 UL Recognition according to UL 1696 (file E80294)

#### JLLPA Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Conduit: High-grade, specially formulated polyamide 6	-18°C to +105°C	Black
Overextrusion: modified polyamide 6	Short-term to: +160°C	
Certification	Fire performance	UV Resistance
Free from halogens and cadmium	Self-extinguishing	Very good
RoHS and REACH compliant		

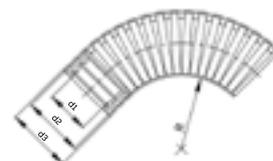

# PMAFLEX Plus

## Type CUS & PUS conduit

### Type CUS - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m/ft)
			Inch	NW	Metric				
	CUSG-17B	CUSG-17S	½	17	20	15.2	21.2	40	31/100
	CUSG-23B	CUSG-23S	¾	23	25	21.9	28.5	45	31/100
	CUSG-29B	CUSG-29S	1	29	32	27.6	34.5	55	31/100
	CUSG-36B	CUSG-36S	1 ¼	36	40	36.0	42.5	60	31/100
	CUSG-48B	CUSG-48S	1 ½	48	50	47.0	54.5	70	31/100

For machine building and installation industries  
 For electrical installations, especially in the US market  
 Inexpensive solution for requirements acc. to UL 1660 (UL Listing)  
 Good ductility and reversed bending characteristics  
 Very good mechanical properties even under extreme conditions, such as low temperatures and low humidity

#### Approvals



#### CUS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Self-extinguishing, acc. to UL 94 V2	-

### Type PUS - Very flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU (m/ft)
			Inch	NW	Metric				
	PUSG-17B	PUSG-17S	½	17	20	15.2	21.2	35/85	31/100
	PUSG-23B	PUSG-23S	¾	23	25	22.0	28.5	40/110	31/100
	PUSG-29B	PUSG-29S	1	29	32	27.7	34.4	50/130	31/100
	PUSG-36B	PUSG-36S	1 ¼	36	40	35.8	42.4	60/180	31/100
	PUSG-48B	PUSG-48S	1 ½	48	50	46.8	54.4	70/220	31/100

For long-term external applications with approval acc. to UL 1660 (UL Listing)  
 For dynamic applications  
 Very good reversed bending resistance  
 Very good mechanical strength at low temperatures  
 Excellent resistance to ultra violet rays and weathering  
 cULUS listed

#### Approvals



#### PUS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 12	-50°C to +95°C	Black/Grey
Certification	Short-term to: +150°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Self-extinguishing, acc. to UL 94 V2	Excellent

# PMAFLEX Plus

## Type VUS conduit

### Type VUS - Flexible, heavy-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m/ft)
			Inch	NW	Metric				
VUS	VUSG-17B	VUSG-17S	½	17	20	15.2	21.2	40	31/100
	VUSG-23B	VUSG-23S	¾	23	25	22.0	28.5	50	31/100
	VUSG-29B	VUSG-29S	1	29	32	27.7	34.4	60	31/100
	VUSG-36B	VUSG-36S	1 ¼	36	40	35.8	42.4	70	31/100
	VUSG-48B	VUSG-48S	1 ½	48	50	46.8	54.4	80	31/100



For static exterior installations with approval acc. to UL 1660 (UL Listing)  
 For applications requiring high compression resistance  
 Good ductility  
 High mechanical strength even under extreme conditions, such as low temperatures and low humidity  
 Very good resistance to ultra violet rays and weathering

### Approvals



### VUS Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-50°C to +105°C	Black/Grey
Certification	Fire performance	UV Resistance
Free from halogens, REACH compliant and RoHS compliant	Short-term to: +160°C	-
		Very good

## PMA Divisible System

### Type PACOF & PPCOF conduit

#### Type PACOF - Flexible, divisible

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PACOF-07B	07	10	5.6	10.0	30	50
	PACOF-10B	10	12	8.5	12.8	33	50
	PACOF-12B	12	16	11.0	15.6	35	50
	PACOF-17B	17	20	15.5	21.1	45	50
	PACOF-23B	23	25	22.1	28.4	70	50
	PACOF-29B	29	32	27.2	34.5	120	50
	PACOF-36B	36	40	32.0	42.4	145	30
	PACOF-48B	48	50	43.9	54.1	150	30
	PACOF-70B	70	80	62.0	79.0	190	10

HL3 according to EN45545-2

NFPA 130 compliant

For machine building and plant construction

For trouble-free retrofitting and applicable for repairs

Can be opened and closed again in longitudinal direction any time

Good ductility

Good compression resistance

#### PACOF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire performance	UV Resistance
	-	-

#### Type PPCOF - Flexible, divisible

	Order no. (black)	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
		NW	Metric				
	PPCOF-07B	07	10	5.6	10.0	25	50
	PPCOF-10B	10	12	8.5	12.8	28	50
	PPCOF-12B	12	16	11.0	15.6	35	50
	PPCOF-17B	17	20	15.1	21.1	45	50
	PPCOF-23B	23	25	22.1	28.4	60	50
	PPCOF-29B	29	32	26.6	34.5	100	50
	PPCOF-36B	36	40	31.8	42.4	120	30
	PPCOF-48B	48	50	43.9	54.1	140	30
	PPCOF-70B	70	80	60.5	78.0	200	10

#### PPCOF Index

min.	max.
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building and plant construction

For trouble-free retrofitting and applicable for repairs

Can be opened and closed again in longitudinal direction any time

Good reversed bending resistance

Materials	Temperature range	Colour
Specially modified polypropylene PP	-20°C to +105°C	Black
Certification	Short-term to +150°C	
	Fire performance	UV Resistance
	-	-

## PMA Smart Line

### Type LLPO & LLPA conduit

#### Type LLPO - Very flexible, light-duty Smartline

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	LLPO-07A	LLPO-07S	07	10	T	6.2	10.0	15	50
	LLPO-10A	LLPO-10S	10	12	T	9.6	13.0	20	50
	LLPO-12A	LLPO-12S	12	16	T	12.0	15.8	30	50
	LLPO-17A	LLPO-17S	17	20	T	16.2	21.2	40	50
	LLPO-23A	LLPO-23S	23	25	T	22.6	28.5	45	50
	LLPO-29A	LLPO-29S	29	32	T	29.0	34.5	55	50
	LLPO-36A	LLPO-36S	36	40	T	36.5	42.5	60	30
	LLPO-48A	LLPO-48S	48	50	T	47.5	54.5	70	30

#### LLPO Index

For machine building and installation  
Excellent reversed bending characteristics  
Very good resistance against acids and hydrolysis

<b>min.</b>	<b>max.</b>
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyolefine	-20°C to +90°C	Black/Grey
Certification	Short-term to: +130°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Good flammability	-

#### Type LLPA - Very flexible, medium-duty Smartline

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	LLPA-07A	LLPA-07S	07	10	T	6.2	10.0	15	50
	LLPA-10A	LLPA-10S	10	12	T	9.6	13.0	20	50
	LLPA-12A	LLPA-12S	12	16	T	12.0	15.8	30	50
	LLPA-17A	LLPA-17S	17	20	T	16.2	21.2	40	50
	LLPA-23A	LLPA-23S	23	25	T	22.6	28.5	45	50
	LLPA-29A	LLPA-29S	29	32	T	29.0	34.5	55	50
	LLPA-36A	LLPA-36S	36	40	T	36.5	42.5	60	30
	LLPA-48A	LLPA-48S	48	50	T	47.5	54.5	70	30

	LLPAG-17A	LLPAG-17S	17	20	G	15.8	21.2	40	50
	LLPAG-23A	LLPAG-23S	23	25	G	21.9	28.5	45	50
	LLPAG-29A	LLPAG-29S	29	32	G	27.6	34.5	55	50
	LLPAG-36A	LLPAG-36S	36	40	G	36.0	42.5	60	30
	LLPAG-48A	LLPAG-48S	48	50	G	47.0	54.5	70	30
	LLPAG-56A	LLPAG-56S	56	68	G	56.3	67.2	120	30
	LLPAG-70A	LLPAG-70S	70	80	G	68.0	80.0	160	10
	LLPAG-95A	LLPAG-95S	95	106	G	91.9	106.0	210	10
	LLPAG-125A	LLPAG-125S	125	146	G	126.5	146.5	450	06

#### Approvals



#### LLPA Index

For machine building, installation and construction industries  
Good ductility  
Good mechanical characteristics

<b>min.</b>	<b>max.</b>
Ductility	
Fatigue reversed bending	
Compression resistance	
Low temperature performance	
Weathering resistance	

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Self extinguishing	UV Resistance
	acc. to UL 94 V2	-

## PMA Smart Line

### Type LLPF

Type LLPF - Very flexible, medium-duty

	Order no. (black)	Order no. (grey)	Conduit size			Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU (m)
			NW	Metric	Profile				
	LLPF-07A	LLPF-07S	7	10	T	6.2	10.0	15	50
	LLPF-10A	LLPF-10S	10	12	T	9.6	13.0	20	50
	LLPF-12A	LLPF-12S	12	16	T	12.0	15.8	30	50
	LLPF-17A	LLPF-17S	17	20	T	16.2	21.2	40	50
	LLPF-23A	LLPF-23S	23	25	T	22.6	28.5	45	50
	LLPF-29A	LLPF-29S	29	32	T	29.0	34.5	55	50
	LLPFG-17A	LLPFG-17S	17	20	G	15.8	21.2	40	50
	LLPFG-23A	LLPFG-23S	23	25	G	21.9	28.5	45	50
	LLPFG-29A	LLPFG-29S	29	32	G	27.6	34.5	55	50
	LLPFG-36A	LLPFG-36S	36	40	G	36.0	42.5	60	30
	LLPFG-48A	LLPFG-48S	48	50	G	47.0	54.5	70	30

#### LLPF Index

min.	max.
Ductility	Good pressure resistance
Fatigue reversed bending	Very good fire safety characteristics
Compression resistance	
Low temperature performance	
Weathering resistance	

For machine building, installation and construction industries  
For applications with high fire safety requirements  
UL 94 V0

Good pressure resistance  
Very good fire safety characteristics

Materials	Temperature range	Colour
Specially modified polyamide 6	-40°C to +105°C	Black/Grey
Certification	Short-term to: +160°C	
Free from halogens, REACH compliant and RoHS compliant	Fire protection	UV Resistance
	Self-extinguishing	-

## PMA overbraided conduits

### PMA stainless steel overbraiding for conduits

#### PMA stainless steel overbraiding for conduits

Order no. (black)	Conduit size		for conduit profile	fits to metal connector	braid spec (mm)	d1 Ø (mm)	d2 Ø (mm)	weight net without conduit (kg/100 m)	PU (m)
	NW	Metric							
xxxT-12x/S	12	16	T	MONK-M162	24 x 8 x 0.30	*	17.5	11.9	50
xxxT-17x/S	17	20	T	MONK-M207	32 x 7 x 0.30	*	23.0	13.8	50
xxxG-17x/S	17	20	G	MONK-M207	32 x 7 x 0.30	*	23.0	13.8	50
xxxG-23x/S	23	25	G	MONK-M253	36 x 8 x 0.30	*	31.0	17.8	50
xxxG-29x/S	29	32	G	MONK-M329	36 x 10 x 0.30	*	36.0	22.2	50
xxxG-36x/S	36	40	G	MONK-M406	36 x 12 x 0.30	*	44.5	26.7	30
xxxG-48x/S	48	50	G	MONK-M508	36 x 14 x 0.30	*	58.5	30.7	30

Our customer service or your local distribution partner will be pleased to help you concerning product availability and lead time

Application: in machine and railway construction; for high mechanical loads; in areas with hot swarf and flying sparks

Characteristics: increased mechanical conduit protection; extremely high abrasion resistance

Coverage: > 90%

Suitable for PMAFLEX, PMA Smart Line; Special metal fittings (MONK)

Materials	Temperature range	Colour
Braid made with stainless steel AISI	-70°C to +1000°C	Metal
Certification	Fire performance	UV Resistance
RoHS compliant	-	-



# PMAFIX Pro

## Introduction

Next generation cable protection. The extremely successful and technically proven PMAFIX System has been developed further to create the PMAFIX Pro product range.

The new generation fittings are the product of experience gained over many years in the most varied application areas. The PMAFIX Pro has two components, an outer body and an inner sealing element. The sealing element functions both as a seal and as a locking mechanism providing all ingress protection grades up to IP68 and IP69 even in applications where there is long term continuous movement. PMAFIX Pro is manufactured by using multiple component injection moulding process.

### Key features

- Meets all ingress protection categories up to and including IP68 and IP69 also when the conduit connection is continually in motion
- Manufactured with newest 2-component injection moulding technology
- Fulfills highest international quality and standard requirements
- Intelligent safety locking mechanism
- Allows simple “push-in” installation of conduits
- Due to the integrated conduit supports conduit remains centralised with little deformation even when bent sharply directly at the fitting





# PMAFIX Pro

## General technical details

—  
01 patent  
—  
02 Up to 100 bar

### Material

- Fittings made from specially modified polyamide 6
- Threads made from nickel-plated brass or polyamide 6
- Sealings made from cross linked polyester elastomer
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Temperature range: -50°C to +105°C, short-term to +160°C

### Characteristics

- Highest assembly reliability – the fitting only locks when the sealing element is fully inserted
- Highest operational safety assured through visual and acoustic correct assembly controls
- Excellent resistance to ultra violet rays and weathering
- Highest impact resistance through fully closed design
- Highest conduit pull out strength
- Vibration-proof connection to PMA conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembling only possible with a screwdriver



—  
01




—  
02

IP68 + IP69


### Static + dynamic

- Highest sealing through fully closed system also in highest dynamic applications
- Extra long ribbed sealing areas (cross linked material)
- 360° locking and sealing element shields against high pressure water jets (up to 100 bar)
- Content of delivery: Locking and sealing element and thread seal for male threads (O-Ring and/or flat gasket)

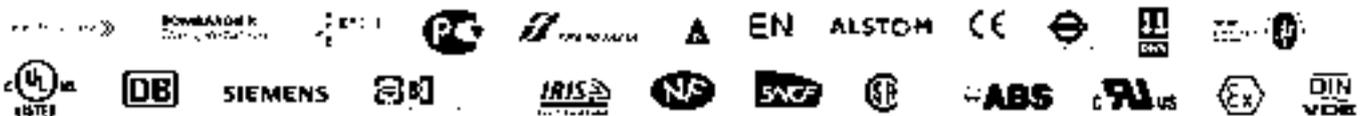


**PMAFIX Pro**

Part number codes

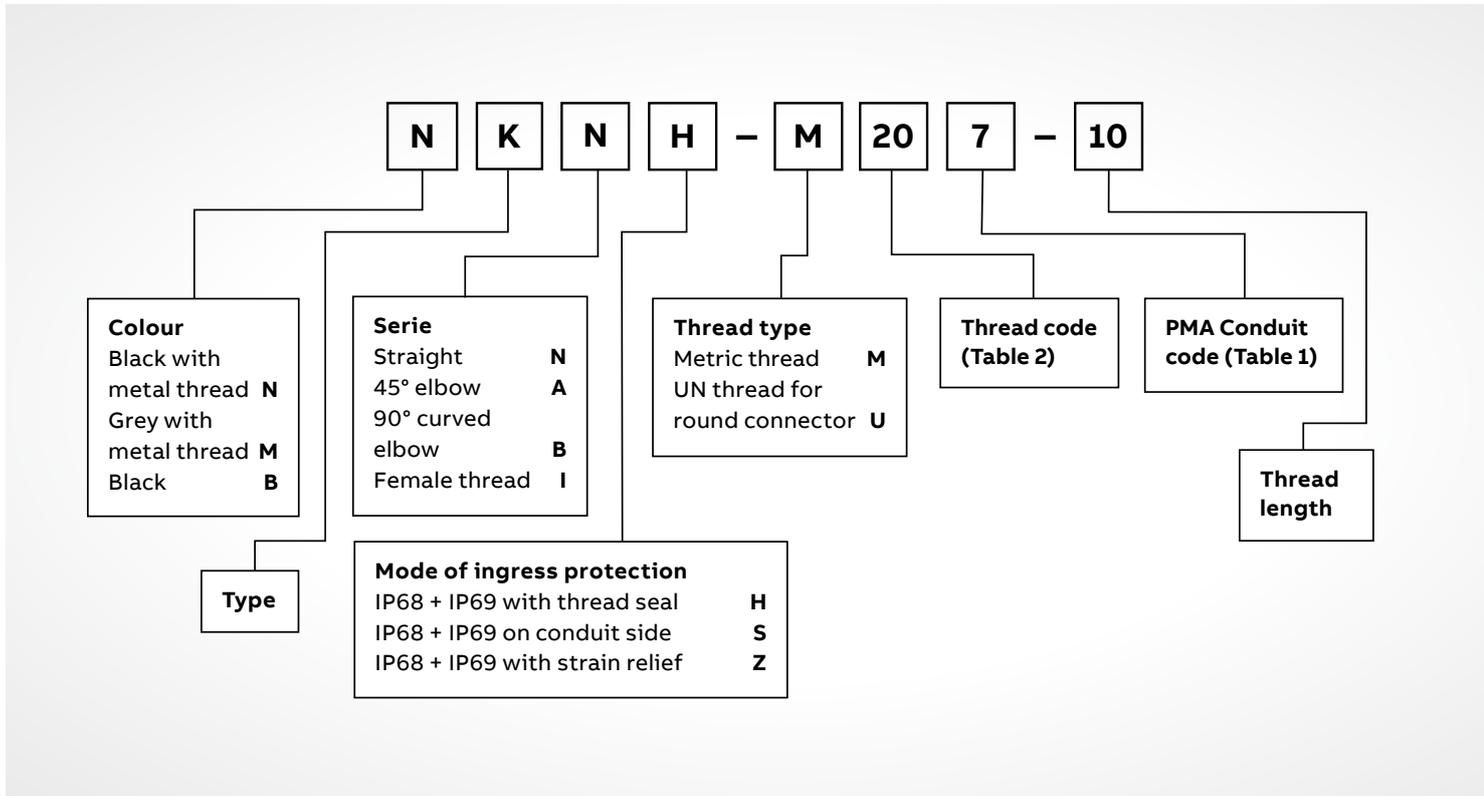

Connector series IP68 + IP69

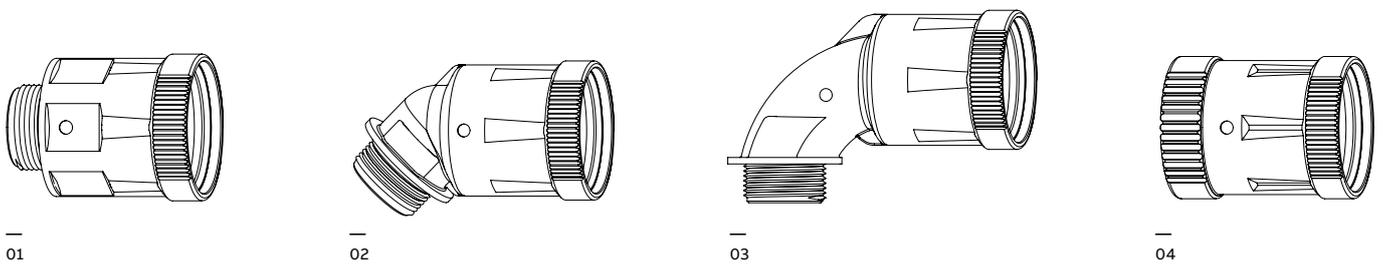

- 01 Straight (N)
- 02 45° elbow (A)
- 03 90° curved elbow (B)
- 04 Female thread (I)

# PMAFIX Pro

## Size codes, installation

Table 1: Conduit codes

Nominal width	Metric size	PMA code
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Table 2: Thread codes


Thread Metric	PMA code
M12x1.5	M12
M16x1.5	M16
M20x1.5	M20
M25x1.5	M25
M32x1.5	M32
M40x1.5	M40
M50x1.5	M50
M63x1.5	M63

Thread UN	PMA code
7/8-20 UNEF	U21
1-20 UNEF	U24
1 3/16-18 UNEF	U29
1 7/16-18 UNEF	U35
1 3/4-18 UNS	U43
2-18 UNS	U50
2 1/4-16 UN	U56

Additional code for female thread connectors


Type	PMA code
With O-ring groove (MIL C 5015)	G

## Installation IP68 + IP69

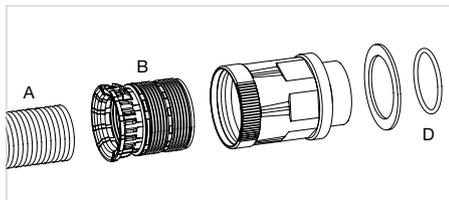


01

A = Corrugated conduit  
 B = Sealing and locking element  
 C = Fitting body  
 D = Thread seal (O-ring or flat gasket\*)

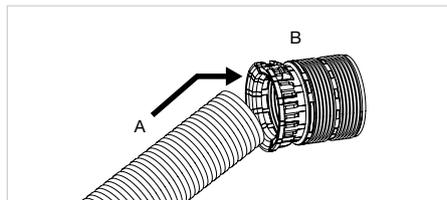


02

Place corrugated conduit (A) at a slight angle against the sealing element (B), then push right into the end.

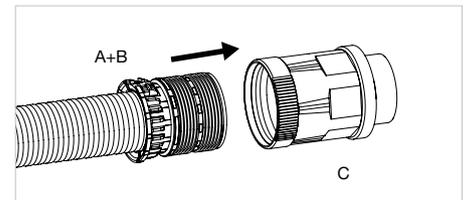


03

Push the conduit and sealing element (A+B) together into the outer body of the fitting (C). Water or a lubricating agent can help facilitate the push-in process.

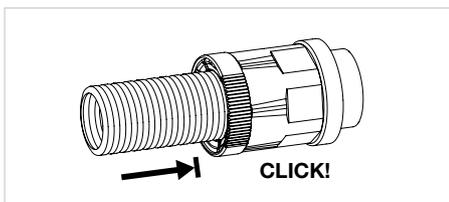


04

The locking mechanism engages when the sealing element is pushed in fully.

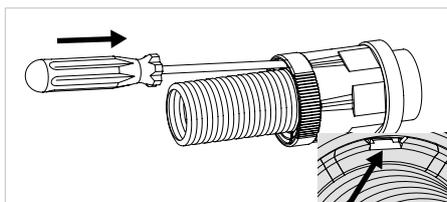

05

To disengage the locking mechanism introduce a size 1 screwdriver parallel to the conduit into the opening shown in the detail drawing.

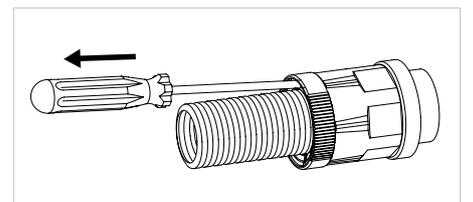


06


Pull the conduit and screwdriver out of the fitting together keeping the screwdriver parallel to the conduit.

**PMAFIX Pro**

Connectors metric, metal thread

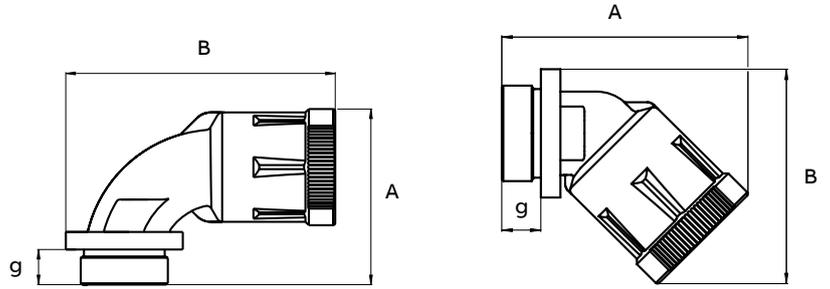

g = Thread length  
A x B = External dimensions

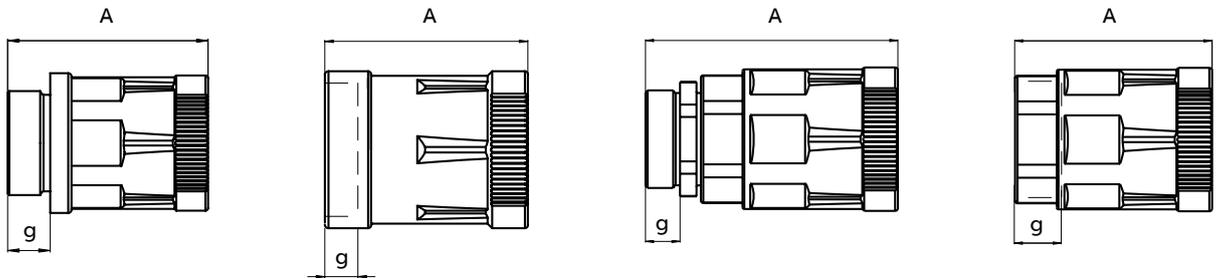

g = Thread length  
A = Overall length

**Type KNH - Connector straight, metric metal thread**

	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	NKNH-M120-10	MKNH-M120-10	M12 x 1.5	10	12	10.0	45.0
	NKNH-M160-10	MKNH-M160-10	M16 x 1.5	10	12	10.0	45.0
	NKNH-M162-10	MKNH-M162-10	M16 x 1.5	12	16	10.0	50.5
	NKNH-M202-10	MKNH-M202-10	M20 x 1.5	12	16	10.0	50.5
	NKNH-M207-10	MKNH-M207-10	M20 x 1.5	17	20	10.0	56.0
	NKNH-M257-11	MKNH-M257-11	M25 x 1.5	17	20	11.0	57.0
	NKNH-M253-11	MKNH-M253-11	M25 x 1.5	23	25	11.0	59.5
	NKNH-M323-13	MKNH-M323-13	M32 x 1.5	23	25	13.0	61.5
	NKNH-M329-13	MKNH-M329-13	M32 x 1.5	29	32	13.0	67.0
	NKNH-M409-13	MKNH-M409-13	M40 x 1.5	29	32	13.0	68.5
	NKNH-M406-13	MKNH-M406-13	M40 x 1.5	36	40	13.0	74.0
	NKNH-M506-14	MKNH-M506-14	M50 x 1.5	36	40	14.0	75.0
	NKNH-M508-14	MKNH-M508-14	M50 x 1.5	48	50	14.0	81.0
	NKNH-M638-14	MKNH-M638-14	M63 x 1.5	48	50	14.0	81.0

**Approvals**



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

## Connectors metric, metal thread

### Type KNZ

Type KNZ - Connector straight with strain relief, metric metal thread



KNZ, patent	Order no. IP68 + IP69 Compl., black	Order no. fitting*	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NKNZ-M120/P1	NKNZ-M120R/P	EK 150p7	M12 x 1.5	10	12	4.0–6.5	5.0	53.5
	NKNZ-M120/P2		EK 150p8	M12 x 1.5	10	12	5.0–8.0	5.0	53.5
	NKNZ-M120/P3		EK 150p9	M12 x 1.5	10	12	6.5–9.5	5.0	53.5
	NKNZ-M160/P1	NKNZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	6.0	54.5
	NKNZ-M160/P2		E 150p8	M16 x 1.5	10	12	5.0–8.0	6.0	54.5
	NKNZ-M160/P3		E 150p9	M16 x 1.5	10	12	6.5–9.5	6.0	54.5
	NKNZ-M202/P1	NKNZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	6.5	60.5
	NKNZ-M202/P3		E 152p9	M20 x 1.5	12	16	6.5–9.5	6.5	60.5
	NKNZ-M202/P4		E 152p11	M20 x 1.5	12	16	7.0–10.5	6.5	60.5
	NKNZ-M207/P3	NKNZ-M207R/P	E 152p9	M20 x 1.5	17	20	6.5–9.5	6.5	66.5
	NKNZ-M207/P4		E 152p11	M20 x 1.5	17	20	7.0–10.5	6.5	66.5
	NKNZ-M207/P5		E 152p13	M20 x 1.5	17	20	9.0–13.0	6.5	66.5
	NKNZ-M257/P4	NKNZ-M257R/P	E 153p11	M25 x 1.5	17	20	7.0–10.5	7.5	67.5
	NKNZ-M257/P5		E 153p13	M25 x 1.5	17	20	9.0–13.0	7.5	67.5
	NKNZ-M257/P6		E 153p16	M25 x 1.5	17	20	11.5–15.5	7.5	67.5
	NKNZ-M253/P5	NKNZ-M253R/P	EK 154p13	M25 x 1.5	23	25	9.0–13.0	7.5	75.0
	NKNZ-M253/P6	NKNZ-M253R1/P	EK 154p16	M25 x 1.5	23	25	11.5–15.5	7.5	75.0
	NKNZ-M323/P2	NKNZ-M323R/P	E 154p13	M32 x 1.5	23	25	9.0–13.0	8.0	76.0
	NKNZ-M323/P4		E 154p18	M32 x 1.5	23	25	14.0–18.0	8.0	76.0
	NKNZ-M323/P5	NKNZ-M323R1/P	E 154p20	M32 x 1.5	23	25	17.0–20.5	8.0	76.0
	NKNZ-M329/P2	NKNZ-M329R/P	EK 155p18	M32 x 1.5	29	32	14.0–18.0	8.0	83.0
	NKNZ-M329/P3		EK 155p20	M32 x 1.5	29	32	17.0–20.5	8.0	83.0
	NKNZ-M329/P4		EK 155p25	M32 x 1.5	29	32	20.0–25.0	8.0	83.0
	NKNZ-M409/P1	NKNZ-M409R/P	E 155p16	M40 x 1.5	29	32	11.5–15.5	8.0	83.0
	NKNZ-M409/P2		E 155p18	M40 x 1.5	29	32	14.0–18.0	8.0	83.0
	NKNZ-M409/P3		E 155p20	M40 x 1.5	29	32	17.0–20.5	8.0	83.0
	NKNZ-M409/P4		E 155p25	M40 x 1.5	29	32	20.0–25.0	8.0	83.0
	NKNZ-M409/P5		E 155p28	M40 x 1.5	29	32	24.0–28.0	8.0	83.0
	NKNZ-M406/P1	NKNZ-M406R/P	E 156p25HF	M40 x 1.5	36	40	20.0–25.0	9.0	87.5
	NKNZ-M406/P2		EK 156p28	M40 x 1.5	36	40	24.0–28.0	9.0	87.5
	NKNZ-M506/P1	NKNZ-M506R/P	E 156p32	M50 x 1.5	36	40	27.0–32.0	10.0	90.0
	NKNZ-M506/P3		E 156p36	M50 x 1.5	36	40	32.0–36.0	10.0	90.0
NKNZ-M508/P2	NKNZ-M508R/P	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	10.0	100.0	
NKNZ-M508/P3		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	10.0	100.0	
NKNZ-M638/P1	NKNZ-M638R/P	E 158pm1x35	M63 x 1.5	48	50	32.0–35.0	10.0	100.0	
NKNZ-M638/P2		E 158p44	M63 x 1.5	48	50	39.0–44.0	10.0	100.0	

\* without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

#### Approvals



## Connectors metric, metal thread

### Type KNZ

Type KNZ - Connector straight with strain relief, metric long metal thread



	Order no. IP68 + IP69 Compl., black	Order no. fitting*	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)	
					NW	Metric				
	KNZ, patent	NKNZ-M160/P1-L	NKNZ-M160R/P-L	E 150p7	M16 x 1.5	10	16	4.0–6.5	15.0	63.5
		NKNZ-M160/P2-L		E 150p8	M16 x 1.5	10	16	5.0–8.0	15.0	63.5
		NKNZ-M160/P3-L		E 150p9	M16 x 1.5	10	16	6.5–9.5	15.0	63.5
		NKNZ-M202/P1-L	NKNZ-M202R/P-L	E 152p7	M20 x 1.5	12	20	4.0–6.5	15.0	69.0
		NKNZ-M202/P3-L		E 152p9	M20 x 1.5	12	20	6.5–9.5	15.0	69.0
		NKNZ-M202/P4-L		E 152p11	M20 x 1.5	12	20	7.0–10.5	15.0	69.0
		NKNZ-M207/P3-L	NKNZ-M207R/P-L	E 152p9	M20 x 1.5	17	20	6.5–9.5	15.0	75.0
		NKNZ-M207/P4-L		E 152p11	M20 x 1.5	17	20	7.0–10.5	15.0	75.0
		NKNZ-M207/P5-L		E 152p13	M20 x 1.5	17	20	9.0–13.0	15.0	75.0
		NKNZ-M257/P5-L	NKNZ-M257R/P-L	E 153p13	M25 x 1.5	17	25	9.0–13.0	15.0	75.0
		NKNZ-M257/P6-L		E 153p16	M25 x 1.5	17	25	11.5–15.5	15.0	75.0
		NKNZ-M323/P2-L	NKNZ-M323R/P-L	E 154p13	M32 x 1.5	23	32	9.0–13.0	15.0	83.0
		NKNZ-M323/P4-L		E 154p18	M32 x 1.5	23	32	14.0–18.0	15.0	83.0
		NKNZ-M323/P5-L	NKNZ-M323R1/P-L	E 154p20	M32 x 1.5	23	32	17.0–20.5	15.0	83.0
		NKNZ-M329/P2-L	NKNZ-M329R/P-L	EK 155p18	M32 x 1.5	29	32	14.0–18.0	15.0	90.0
		NKNZ-M329/P3-L		EK 155p20	M32 x 1.5	29	40	17.0–20.5	15.0	90.0
		NKNZ-M409/P3-L	NKNZ-M409R/P-L	E 155p20	M40 x 1.5	29	40	17.0–20.5	15.0	90.0
		NKNZ-M409/P4-L		E 155p25	M40 x 1.5	29	40	20.0–25.0	15.0	90.0
		NKNZ-M409/P5-L		E 155p28	M40 x 1.5	29	50	24.0–28.0	15.0	90.0
		NKNZ-M506/P1-L	NKNZ-M506R/P-L	E 156p32	M50 x 1.5	36	50	27.0–32.0	15.0	95.0
	NKNZ-M506/P3-L		E 156p36	M50 x 1.5	36	50	32.0–36.0	15.0	95.0	
	NKNZ-M508/P2-L	NKNZ-M508R/P-L	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	15.0	105.0	
	NKNZ-M508/P3-L		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	15.0	105.0	
	NKNZ-M638/P1-L	NKNZ-M638R/P-L	E 158pm1x35	M63 x 1.5	48	63	32.0–35.0	15.0	105.0	
	NKNZ-M638/P2-L		E 158p44	M63 x 1.5	48	63	39.0–44.0	15.0	105.0	

\* without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

#### Approvals



## Connectors metric, metal thread

### Type KAH & KBH

#### Type KAH - Connector 45° elbow, metric metal thread

	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
KAH, patent 	NKAH-M120-10	MKAH-M120-10	M12 x 1.5	10	12	10.0	55.5 x 43.0
	NKAH-M160-10	MKAH-M160-10	M16 x 1.5	10	12	10.0	55.5 x 45.0
	NKAH-M162-10	MKAH-M162-10	M16 x 1.5	12	16	10.0	62.5 x 50.0
	NKAH-M202-10	MKAH-M202-10	M20 x 1.5	12	16	10.0	62.5 x 52.0
	NKAH-M207-10	MKAH-M207-10	M20 x 1.5	17	20	10.0	71.0 x 59.5
	NKAH-M257-11	MKAH-M257-11	M25 x 1.5	17	20	11.0	72.0 x 62.5
	NKAH-M253-11	MKAH-M253-11	M25 x 1.5	23	25	11.0	80.0 x 68.0
	NKAH-M323-13	MKAH-M323-13	M32 x 1.5	23	25	13.0	82.0 x 72.0
	NKAH-M329-13	MKAH-M329-13	M32 x 1.5	29	32	13.0	93.0 x 79.5
	NKAH-M409-13	MKAH-M409-13	M40 x 1.5	29	32	13.0	94.5 x 85.5
	NKAH-M406-13	MKAH-M406-13	M40 x 1.5	36	40	13.0	105.5 x 93.5
	NKAH-M506-14	MKAH-M506-14	M50 x 1.5	36	40	14.0	106.5 x 98.5
	NKAH-M508-14	MKAH-M508-14	M50 x 1.5	48	50	14.0	120.0 x 111.0
	NKAH-M638-14	MKAH-M638-14	M63 x 1.5	48	50	14.0	120.0 x 114.0

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

#### Type KBH - Connector 90° curved elbow, metric metal thread

	Order no. black IP68 + IP69	Order no. grey IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
KBH, patent 	NKBH-M120-10	MKBH-M120-10	M12 x 1.5	10	12	10.0	44.0 x 62.5
	NKBH-M160-10	MKBH-M160-10	M16 x 1.5	10	12	10.0	44.0 x 64.5
	NKBH-M162-10	MKBH-M162-10	M16 x 1.5	12	16	10.0	47.5 x 72.0
	NKBH-M202-10	MKBH-M202-10	M20 x 1.5	12	16	10.0	47.5 x 74.0
	NKBH-M207-10	MKBH-M207-10	M20 x 1.5	17	20	10.0	53.0 x 81.0
	NKBH-M257-11	MKBH-M257-11	M25 x 1.5	17	20	11.0	54.0 x 84.0
	NKBH-M253-11	MKBH-M253-11	M25 x 1.5	23	25	11.0	63.0 x 92.0
	NKBH-M323-13	MKBH-M323-13	M32 x 1.5	23	25	13.0	65.0 x 96.0
	NKBH-M329-13	MKBH-M329-13	M32 x 1.5	29	32	13.0	75.0 x 108.0
	NKBH-M409-13	MKBH-M409-13	M40 x 1.5	29	32	13.0	76.5 x 114.0
	NKBH-M406-13	MKBH-M406-13	M40 x 1.5	36	40	13.0	87.5 x 126.0
	NKBH-M506-14	MKBH-M506-14	M50 x 1.5	36	40	14.0	88.5 x 131.0
	NKBH-M508-14	MKBH-M508-14	M50 x 1.5	48	50	14.0	101.0 x 145.5
	NKBH-M638-14	MKBH-M638-14	M63 x 1.5	48	50	14.0	101.0 x 148.5

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength  
Smooth elbow allows easy threading of wires and cables

## Connectors, female polyamide UNEF thread

### Type KIHG

Type KIHG - Connector straight, UN female thread for MIL-C5015

	Order no. black IP68 + IP69	Thread UN	Shell size MIL	Fits to conduit size		Thread length (mm)	Overall length (mm)	
				NW	Metric			
	BKIHG-U212	7/8"-20 UNEF	16	12	16	9.0	47.0	
	BKIHG-U217	7/8"-20 UNEF	16	17	20	9.0	52.5	
	BKIHG-U242	1"-20 UNEF	18	12	16	9.0	47.0	
	BKIHG-U247	1"-20 UNEF	18	17	20	9.0	52.5	
	BKIHG-U243	1"-20 UNEF	18	23	23	9.0	55.5	
	BKIHG-U292	1 3/16"-18 UNEF	20	12	16	9.0	50.5	
	BKIHG-U297	1 3/16"-18 UNEF	20	17	20	9.0	52.5	
	BKIHG-U293	1 3/16"-18 UNEF	20	23	25	9.0	55.5	
	BKIHG-U299	1 3/16"-18 UNEF	20	29	32	9.0	61.0	
	BKIHG-U357	1 7/16"-18 UNEF	24	17	20	9.0	58.0	
	BKIHG-U353	1 7/16"-18 UNEF	24	23	25	9.0	55.5	
	BKIHG-U359	1 7/16"-18 UNEF	24	29	32	9.0	61.0	
	BKIHG-U433	1 3/4"-18 UNS	32	23	25	10.0	62.5	
	BKIHG-U439	1 3/4"-18 UNS	32	29	32	10.0	62.0	
	BKIHG-U503	2"-18 UNS	36	23	25	10.0	67.0	
	BKIHG-U509	2"-18 UNS	36	29	32	10.0	67.5	
	<b>Approvals</b>	BKIHG-U506	2"-18 UNS	36	36	40	10.0	67.0
		BKIHG-U508	2"-18 UNS	36	48	50	10.0	73.5
BKIHG-U566		2 1/4"-16 UN	40	36	40	10.0	72.0	
BKIHG-U568		2 1/4"-16 UN	40	48	50	10.0	73.5	

For applications in railway vehicles and heavy machine construction  
Suitable for MIL connector, series C5015

## Connectors metric, female metal thread

Type KIS

Type KIS - Connector straight, metric metal female thread

	Order no. black IP68 + IP69	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NKIS-M162	M16 x 1.5	12	16	9.0	49.0
	NKIS-M207	M20 x 1.5	17	20	10.5	56.0
	NKIS-M253	M25 x 1.5	23	25	10.5	58.5
	NKIS-M329	M32 x 1.5	29	32	11.0	65.5
	NKIS-M406	M40 x 1.5	36	40	13.5	72.0
	NKIS-M508	M50 x 1.5	48	50	15.0	83.0
	NKIS-M638	M63 x 1.5	48	50	17.5	84.0

### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength  
No seal on female thread side

## Connectors nylon straight fitting

### Type JKNH & JKBH

#### Type JKNH - Connector two-piece, straight, IP69, metric thread

	Order no. blue	Thread size metric	Fits to conduit size NW	Dimensions					Weight kg/100 pcs	Packing unit/pcs
				g (mm)	Ø ID (mm)	Ø D (mm)	L max. (mm)	sw (mm)		
	JKNH-M162	M16 x 1.5	12	11.0	11.0	28.5	47.5	25	0.8	10
	JKNH-M202	M20 x 1.5	12	12.5	11.0	28.5	47.5	25	0.9	10
	JKNH-M207	M20 x 1.5	17	14.5	11.0	35.0	53.5	32	1.4	10
	JKNH-M257	M25 x 1.5	17	16.5	12.0	35.0	54.5	32	1.5	10
	JKNH-M253	M25 x 1.5	23	19.0	12.0	42.0	57.0	38	1.7	10
	JKNH-M323	M32 x 1.5	23	23.0	15.0	43.0	60.5	38	2.0	10
	JKNH-M329	M32 x 1.5	29	26.0	15.0	51.5	65.5	46	3.2	10
	JKNH-M409	M40 x 1.5	29	29.0	19.0	51.5	69.5	46	3.7	10
	JKNH-M406	M40 x 1.5	36	32.0	19.0	65.0	75.0	60	5.9	10
	JKNH-M506	M50 x 1.5	36	37.5	19.0	65.0	75.0	60	6.2	10
	JKNH-M508	M50 x 1.5	48	42.0	19.0	75.0	81.0	70	7.5	10
	JKNH-M638	M63 x 1.5	48	48.5	19.0	75.0	81.0	70	7.8	10

#### Approvals



Very high impact resistance - easy push-in assembly  
Corrosion-free  
Excellent conduit pull-out strength  
IP69 system protection for indoor splash zone areas

#### Type JKBH - 90° curved elbow, IP69, metric thread

	Order no. blue	Thread size metric	Fits to conduit size NW	Dimensions									Weight kg/100 pcs	Packing unit/pcs
				g (mm)	d1 (mm)	d2 (mm)	d3 (mm)	SW (mm)	A (mm)	B (mm)	R (mm)			
	JKBH-M162	M16 x 1.5	12	11	8.0	28.5	24.0	15.0	44.5	72.0	28.0	1.5	10	
	JKBH-M202	M20 x 1.5	12	11	11.8	28.5	28.0	15.0	44.5	74.0	28.0	1.3	10	
	JKBH-M207	M20 x 1.5	17	11	11.5	35.0	29.0	20.0	50.0	81.0	29.5	2.5	10	
	JKBH-M257	M25 x 1.5	17	12	16.5	35.0	35.0	20.0	51.0	84.0	29.5	2.2	10	
	JKBH-M253	M25 x 1.5	23	12	16.0	43.0	35.0	26.0	59.5	92.0	35.0	3.9	10	
	JKBH-M323	M32 x 1.5	23	15	22.5	43.0	40.0	26.0	63.0	94.5	35.0	3.2	10	
	JKBH-M329	M32 x 1.5	29	15	23.0	51.5	43.0	33.0	73.0	108.0	41.5	6.8	10	
	JKBH-M409	M40 x 1.5	29	19	28.5	51.5	51.0	33.0	77.0	112.0	41.5	6.0	10	
	JKBH-M406	M40 x 1.5	36	19	29.5	60.5	55.0	41.0	87.5	126.0	49.0	11.0	10	
	JKBH-M506	M50 x 1.5	36	19	37.0	60.5	59.0	41.0	87.5	128.0	49.0	9.0	10	
	JKBH-M508	M50 x 1.5	48	19	38.5	73.0	69.0	46.0	100.5	145.5	55.5	18.0	10	
	JKBH-M638	M63 x 1.5	48	19	48.0	73.0	75.0	55.0	100.5	148.5	55.5	14.0	10	

#### Approvals



Very high impact resistance - easy push-in assembly  
Corrosion-free  
Excellent conduit pull-out strength  
IP69 system protection for indoor splash zone areas

# PMAFIX IP66, IP68 (IP69)

## General technical details

PMAFIX connectors. The designation PMAFIX describes a very large range of connectors for PMA conduits with the patented PMA safety clip system.

Connectors are available for degrees of ingress protection IP66 and IP68 according to IEC 60529. IP66 connectors are fitted with a pre-installed universal safety clip which ensures a quick “push-in” installation. IP68 connectors for increased requirements will be delivered with a special conduit seal cap. The new PMAFIX IP68GT fittings combine simplest push-in assembly with highest sealing performance. It is also possible to upgrade to IP69 by retrofitting water impact protection.

### Material

- Fittings made from specially formulated polyamide 6
- Threads made from nickel-plated brass or polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Very good chemical properties
- Temperature range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ , short-term to  $+160^{\circ}\text{C}$

### Characteristics

- Excellent conduit pull-out strength
- High impact resistance
- Vibration-proof connection to PMA corrugated conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembly is only possible with a screwdriver





## PMAFIX

### General technical details



—  
Patent

#### IP66

##### IP66 static

##### IP54 dynamic

- One piece fitting
- Conical sealing method
- Easy “push-in” installation
- Pre-installed safety clip AFN2
- Content of delivery: Connector with pre-installed safety clip



—  
Patent

#### IP68GT

##### IP68, IP69 static

##### IP67, IP69 dynamic

- The single piece PMAFIX IP68GT fitting with integrated sealing cap and pre-installed locking clip
- Simple push-in assembly (as with the proven PMAFIX IP66 system)
- The extra long sealing cap guarantees the highest level of ingress protection
- Identical approvals as for the PMAFIX IP68 system component version
- Fast modification of specification drawings through simple addition of “GT” to the existing order number (e.g. BVNV-M257 → BVNV-M257GT)
- Additional water protection ring WPS for IP69 ingress protection in conjunction with the IP68 system to be applied right after the IP68 connector onto the conduit
- Content of delivery: Connector with integrated sealing cap, pre-installed safety clip and thread seal for male thread (O-ring and/or flat gasket)



—  
Patent

#### IP68

##### IP68, IP69 static


##### IP67, IP69 dynamic

- High sealing through additional seal cap
- For highest dynamic applications
- Additional water protection ring WPS for IP69 ingress protection in conjunction with the IP68 system to be applied right after the IP68 connector onto the conduit
- Content of delivery: Connector with sealing cap, safety clip and thread seal for male thread (O-ring and/or flat gasket)

# PMAFIX connectors


## Part number codes

For part number explanation only, not to be used as a configuration tool.

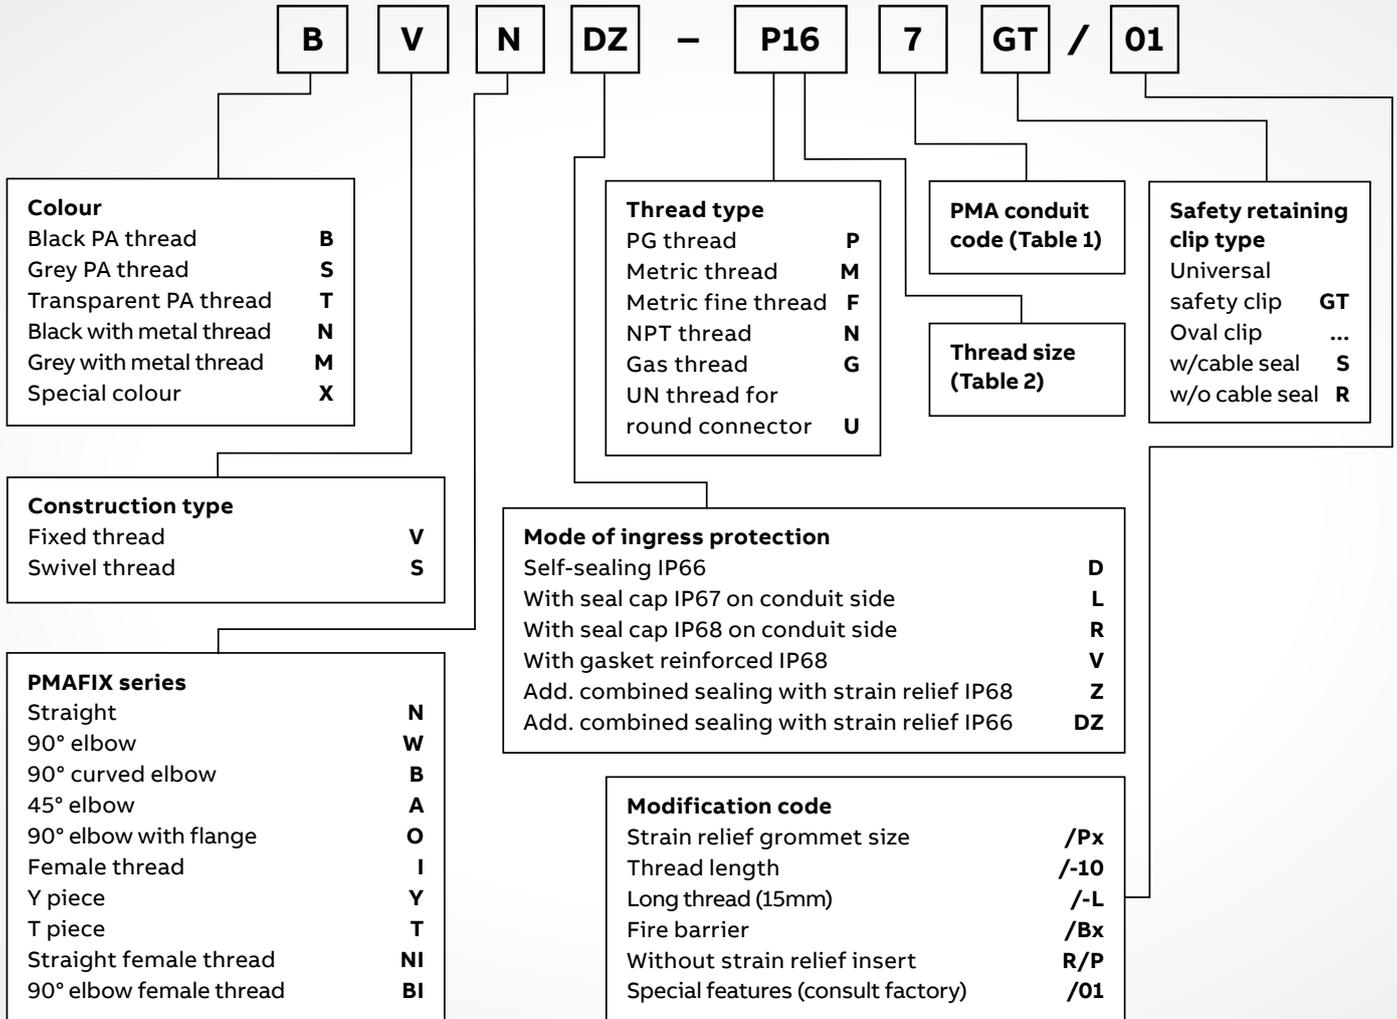

## Connector series

- 01 Serie N
- 02 Serie W
- 03 Serie B
- 04 Serie A
- 05 Serie O
- 06 Serie I
- 07 Serie Y
- 08 Serie T

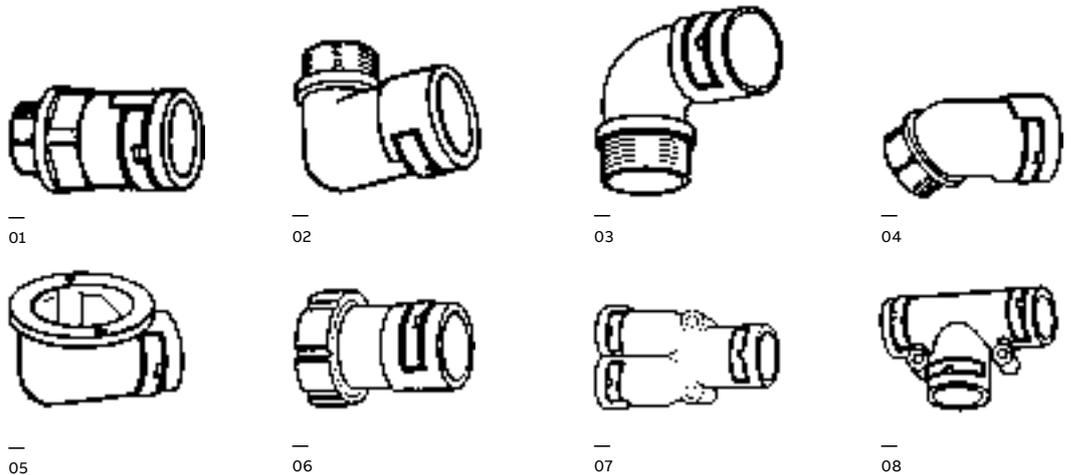

## PMAFIX

### Size codes

Table 1: Conduit codes

Nominal width	Metric size	PMA code
07	10	M
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Additional code for female thread connectors


Type	PMA code
AMP	A
Souriau (ex Burndy) UTG 6	B
With O-ring groove (MIL C 5015)	G
Souriau UTO/UTS	S

Table 2: Thread codes

Thread metric	PMA code	Thread PG	PMA code	Thread Gas	PMA code	Thread NPT	PMA code	Thread UN	PMA code
		PG07	P07	G ¼	G00				
M12 x 1.5	M12	PG09	P09	G ⅜	G01				
M16 x 1.5	M16	PG11	P11	G ½	G02	N ½	N02	½-28 UNEF	U12
M20 x 1.5	M20	PG13.5	P13	G ¾	G04	N ¾	N04	9/16-24 UNEF	U13
		PG16	P16	G 1	G06	N 1	N06	5/8-24 UNEF	U15
M25 x 1.5	M25	PG21	P21	G 1¼	G07	N 1¼	N07	11/16-24 UNEF	U16
M32 x 1.5	M32	PG29	P29	G 1½	G08	N 1½	N08	¾-20 UNEF	U18
M40 x 1.5	M40	PG36	P36	G 2	G09	N 2	N09	13/16-20 UNEF	U20
M50 x 1.5	M50	PG42	P42	G 2¼	G10			7/8-20 UNEF	U21
M63 x 1.5	M63	PG48	P48	G 2½	G11			15/16-20 UNEF	U23
								1-20 UNEF	U24
								1¼-18 UNEF	U26
M 8 x 1.0	F08							3/16-18 UNEF	U29
M12 x 1.0	F12							1/4-18 UNEF	U30
M18 x 1.0	F18							5/16-18 UNEF	U32
								3/8-18 UNEF	U34
								17/16-18 UNEF	U35
								15/8-18 UNEF	U40
								1¾-18 UNS	U43
								2-18 UNS	U50
								2¼-16 UN	U56
								25/8-12 UN	U57
								2½-12 UN	U62


**PMAFIX**  
Installation

Installation IP66

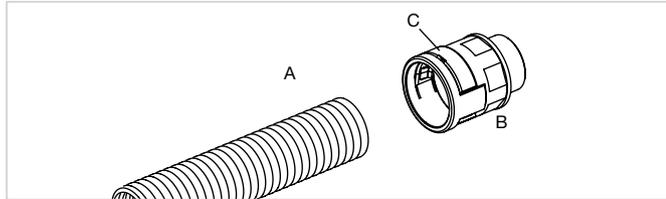


01

A = Conduit  
B = Fitting  
C = Universal safety clip

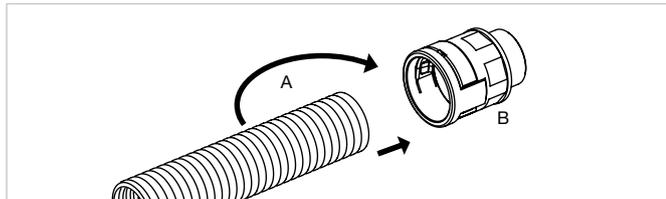

02

Push in the conduit (A) with a slight twist until the stop.

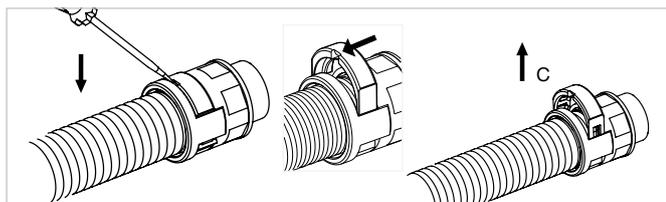


03

To re-open use a screwdriver.  
The screwdriver slot in the oval clip (C) should be on the conduit side.


Locking clip pre-installed in all IP66 connectors.

Installation IP68GT

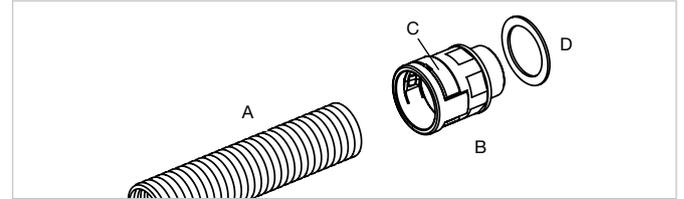


01

A = Conduit  
B = Fitting with integrated sealing cap  
C = Universal safety clip  
D = Thread seal (either O-ring or flat gasket\*, not both)

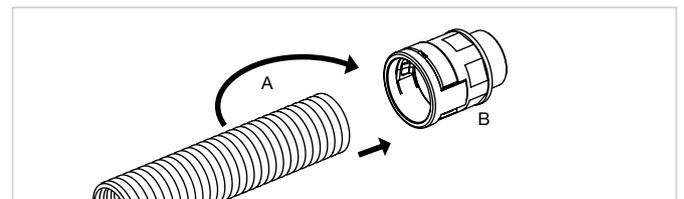

02

Push in the conduit (A) right into the end of the fitting (B) with a slight twist. Additional insertion resistance will be felt when the end of the fitting has been reached.

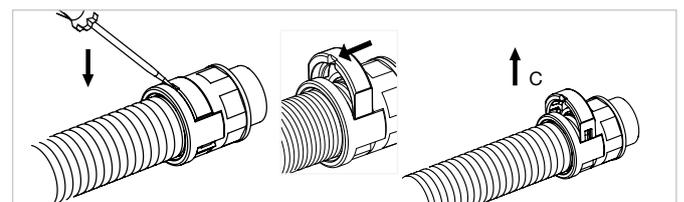

03


To re-open use a screwdriver.  
The screwdriver slot in the oval clip (C) should be on the conduit side.

Pre-installed sealing cap and locking clip in all IP68GT connectors.

\* Ensure to follow O-ring manufacturers guidelines when using O-rings for sealing purposes.


# PMAFIX Installation

## Installation IP68 (IP69)

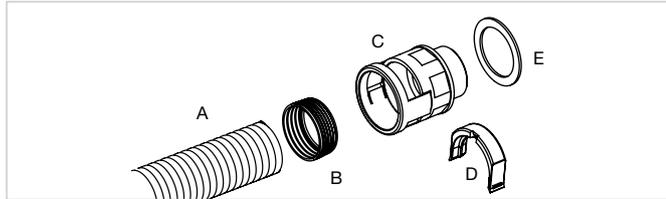


01

- A = Conduit
- B = Sealing cap
- C = Fitting
- D = Oval clip
- E = Thread seal (O-ring or flat seal\*)

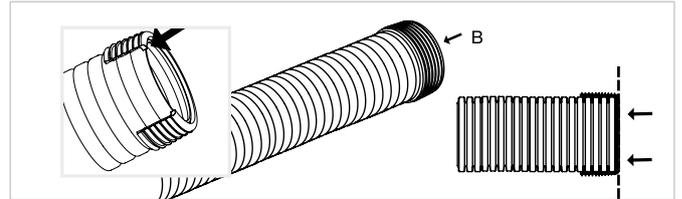


02

Push sealing cap (B) completely onto the conduit in order to achieve IP68.

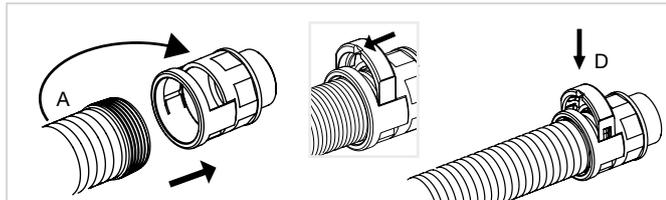


03

Push in the conduit (A) with a slight twist until the stop. Insert oval clip (D) in the locking element window and click into place. Screwdriver slot in the oval clip should be on conduit side.

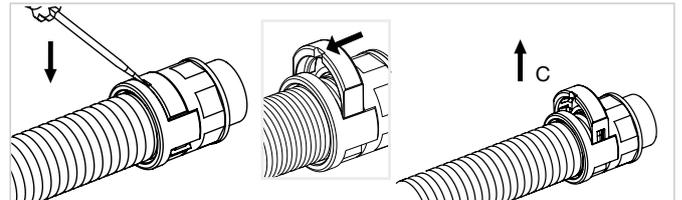


04

To re-open use a screwdriver.

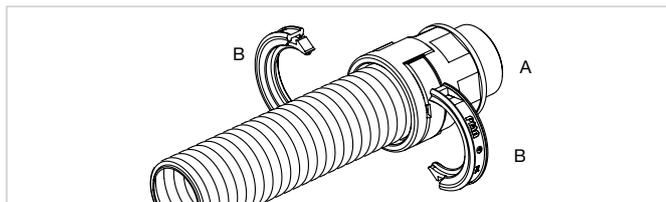

05

- For IP69:
- Based on IP68 System
- A = Conduit with IP68 fitting
- B = WPS half shells

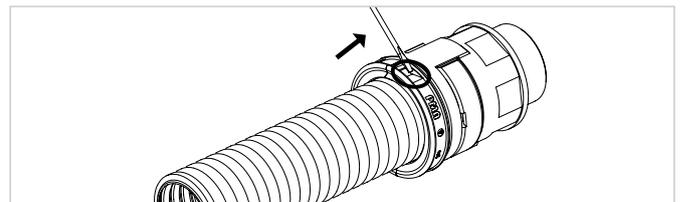


06

To re-open use a screwdriver.

\* For safety reasons, oval clip will not fit if seal cap is not fully installed.

Ensure to follow O-ring manufacturers guidelines when using O-rings for sealing purposes.

## Fitting dimensions

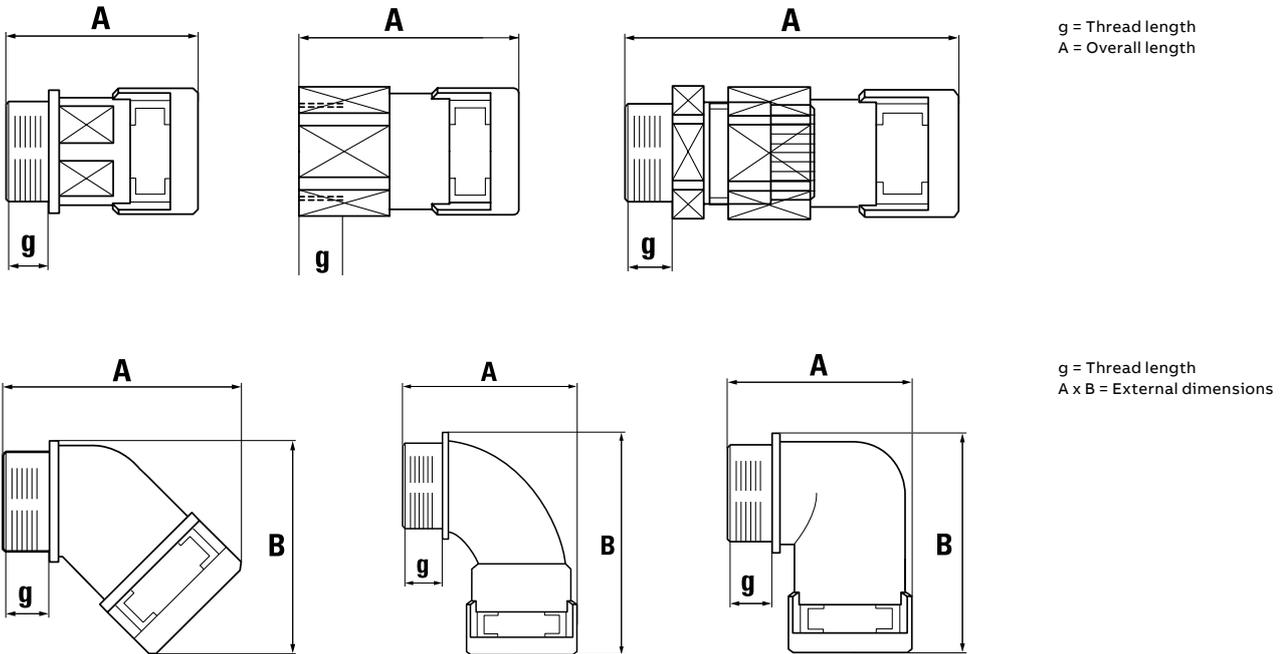

## PMAFIX

## Connectors metric, polyamide thread

## Type VN - Connector straight, metric thread

	Order no. IP66 ①	Order no. IP68* ① ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-M12MGT	BVNV-M12M	M12 x 1.5	07	10	11.0	34.5
	BVND-M120GT	BVNV-M120	M12 x 1.5	10	12	11.0	36.5
	BVND-M160GT	BVNV-M160	M16 x 1.5	10	12	11.0	36.5
	BVND-M162GT	BVNV-M162	M16 x 1.5	12	16	11.0	39.5
	BVND-M200GT	BVNV-M200	M20 x 1.5	10	12	11.0	36.5
	BVND-M202GT	BVNV-M202	M20 x 1.5	12	16	11.0	39.5
	BVND-M207GT	BVNV-M207	M20 x 1.5	17	20	11.0	47.5
	BVND-M203GT	BVNV-M203	M20 x 1.5	23	25	11.0	51.0
	BVND-M257GT	BVNV-M257	M25 x 1.5	17	20	12.0	48.5
	BVND-M253GT	BVNV-M253	M25 x 1.5	23	25	12.0	52.0
	BVND-M323GT	BVNV-M323	M32 x 1.5	23	25	15.0	55.5
	BVND-M329GT	BVNV-M329	M32 x 1.5	29	32	15.0	56.0
	BVND-M409GT	BVNV-M409	M40 x 1.5	29	32	19.0	60.0
	BVND-M406GT	BVNV-M406	M40 x 1.5	36	40	19.0	72.5
	BVND-M506GT	BVNV-M506	M50 x 1.5	36	40	19.0	72.0
	BVND-M508GT	BVNV-M508	M50 x 1.5	48	50	19.0	72.5
BVND-M638GT	BVNV-M638	M63 x 1.5	48	50	19.0	72.0	

## Approvals



For cable protection systems in a wide range of applications

- ① Please replace "B" for black with "S" for grey in front of the order no.  
② IP68GT available. Please add "GT" after the order no.

## Connectors metric, polyamide thread

### Type VNDZ/VNZ & VA

#### Type VNDZ/VNZ - Connector straight with strain relief, metric thread

	Order no. IP66 ①	Order no. IP68 ① ③	Thread metric	Fits to conduit size		Terminal range	Thread length (mm)	Overall length (mm)
				NW	Metric			
	BVNDZ-M160GT	–	M16 x 1.5	10	12	5.0–10.0	8.0	62.0
	BVNDZ-M162GT	BVNZ-M162S	M16 x 1.5	12	16	5.0–10.0	8.0	62.0
	BVNDZ-M207GT	BVNZ-M207S	M20 x 1.5	17	20	10.0–14.0	8.0	72.0
	BVNDZ-M253GT	BVNZ-M253S	M25 x 1.5	23	25	13.0–18.0	8.0	81.0
	BVNDZ-M329GT	BVNZ-M329S	M32 x 1.5	29	32	18.0–25.0	10.0	85.0
	BVNDZ-M406GT	BVNZ-M406S	M40 x 1.5	36	40	22.0–32.0	10.0	108.5
	BVNDZ-M508GT	BVNZ-M508S	M50 x 1.5	48	50	30.0–38.0	12.0	119.5
	BVNDZ-M638GT	BVNZ-M638S	M63 x 1.5	48	50	34.0–44.0	12.0	119.5

For machine and plant construction

For separation of damp and dry areas

Integrated strain relief optimally holds and seals cables

If several conductors are used with the connector multiple sealing inserts should be considered

**Note:** For several conductors multiple sealing inserts MDE are available

#### Type VA - Connector 45° elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVAD-M120GT	–	M12 x 1.5	10	12	11.0	43.5 x 37.0
	BVAD-M160GT	BVAV-M160	M16 x 1.5	10	12	11.0	43.5 x 38.0
	BVAD-M162GT	BVAV-M162	M16 x 1.5	12	16	11.0	48.0 x 40.0
	BVAD-M202GT	BVAV-M202	M20 x 1.5	12	16	11.0	48.0 x 41.5
	BVAD-M207GT	BVAV-M207	M20 x 1.5	17	20	11.0	55.5 x 51.5
	BVAD-M253GT	BVAV-M253	M25 x 1.5	23	25	12.0	65.0 x 58.5
	BVAD-M329GT	BVAV-M329	M32 x 1.5	29	32	15.0	73.5 x 66.5
	BVAD-M406GT	BVAV-M406	M40 x 1.5	36	40	19.0	92.5 x 85.5
	BVAD-M506GT	BVAV-M506	M50 x 1.5	36	40	19.0	92.5 x 89.5
	BVAD-M508GT	BVAV-M508	M50 x 1.5	48	50	19.0	100.0 x 96.0
	BVAD-M638GT	BVAV-M638	M63 x 1.5	48	50	19.0	100.0 x 104.0

#### Approvals



① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

③ IP68GT available. Please replace "S" at the end with "GT" (e.g. BVNZ-M207GT)

## Connectors metric, polyamide thread

### Type VB & VW

#### Type VB - Connector 90° curved elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVBD-M207GT	BVBV-M207	M20 x 1.5	17	20	11.0	47.5 x 73.0
	BVBD-M257GT	BVBV-M257	M25 x 1.5	17	20	12.0	48.5 x 76.0
	BVBD-M253GT	BVBV-M253	M25 x 1.5	23	25	12.0	57.5 x 83.0
	BVBD-M323GT	BVBV-M323	M32 x 1.5	23	25	15.0	61.0 x 87.5
	BVBD-M329GT	BVBV-M329	M32 x 1.5	29	32	15.0	70.5 x 93.0
	BVBD-M409GT	BVBV-M409	M40 x 1.5	29	32	19.0	74.5 x 98.5
	BVBD-M406GT	BVBV-M406	M40 x 1.5	36	40	19.0	85.0 x 121.0
	BVBD-M506GT	BVBV-M506	M50 x 1.5	36	40	19.0	85.0 x 125.0
	BVBD-M508GT	BVBV-M508	M50 x 1.5	48	50	19.0	98.5 x 130.0
	BVBD-M638GT	BVBV-M638	M63 x 1.5	48	50	19.0	98.5 x 138.0

#### Approvals



For cable protection systems in a wide range of applications  
Smooth elbow allows easy threading of wires and cables

**Note:** For smaller conduit sizes NW 10 to NW 12 appropriate standard elbows of type VW are also available

#### Type VW - Connector 90° elbow, metric thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-M12MGT	BVWV-M12M	M12 x 1.5	07	10	11.0	32.0 x 35.0
	BVWD-M120GT	BVWV-M120	M12 x 1.5	10	12	11.0	34.0 x 39.5
	BVWD-M160GT	BVWV-M160	M16 x 1.5	10	12	11.0	34.0 x 40.5
	BVWD-M162GT	BVWV-M162	M16 x 1.5	12	16	11.0	38.5 x 46.0
	BVWD-M200GT	–	M20 x 1.5	10	12	11.0	34.0 x 42.5
	BVWD-M202GT	BVWV-M202	M20 x 1.5	12	16	11.0	38.5 x 47.5
	BVWD-M207GT	BVWV-M207	M20 x 1.5	17	20	11.0	43.5 x 58.5
	BVWD-M253GT	BVWV-M253	M25 x 1.5	23	25	12.0	54.0 x 65.0
	BVWD-M329GT	BVWV-M329	M32 x 1.5	29	32	15.0	64.5 x 73.0
	BVWD-M406GT	BVWV-M406	M40 x 1.5	36	40	19.0	78.0 x 96.0
	BVWD-M508GT	BVWV-M508	M50 x 1.5	48	50	19.0	91.5 x 106.0

#### Approvals



For cable protection systems in a wide range of applications

**Note:** For sizes NW 17 to NW 48 curved elbows of type VB are also available

- ① Please replace "B" for black with "S" for grey in front of the order no.  
② IP68GT available. Please add "GT" after the order no.

## Connectors metric, metal thread

### Type VNV

#### Type VNV - Connector straight, NPT metal thread

	Order no. IP68, black <sup>4</sup>	Order no. IP68, grey <sup>4</sup>	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)	
				NW	Metric			
	NVNV-M120-10	MVNV-M120-10	M12 x 1.5	10	12	10.0	40.0	
	NVNV-M120-5	MVNV-M120-5	M12 x 1.5	10	12	5.0	35.0	
	NVNV-M160-10	MVNV-M160-10	M16 x 1.5	10	12	10.0	40.0	
	NVNV-M160-5	MVNV-M160-5	M16 x 1.5	10	12	5.0	35.0	
	NVNV-M162-10	MVNV-M162-10	M16 x 1.5	12	16	10.0	43.0	
	NVNV-M162-5	MVNV-M162-5	M16 x 1.5	12	16	5.0	38.0	
	NVNV-M202-10	MVNV-M202-10	M20 x 1.5	12	16	10.0	43.0	
	NVNV-M202-6	MVNV-M202-6	M20 x 1.5	12	16	6.0	39.0	
	NVNV-M207-10	MVNV-M207-10	M20 x 1.5	17	20	10.0	51.0	
	NVNV-M207-6	MVNV-M207-6	M20 x 1.5	17	20	6.0	47.0	
	NVNV-M257-11	MVNV-M257-11	M25 x 1.5	17	20	11.0	52.0	
	NVNV-M257-7	MVNV-M257-7	M25 x 1.5	17	20	7.0	48.0	
	NVNV-M253-11	MVNV-M253-11	M25 x 1.5	23	25	11.0	54.0	
	NVNV-M253-7	MVNV-M253-7	M25 x 1.5	23	25	7.0	50.0	
	NVNV-M323-13	MVNV-M323-13	M32 x 1.5	23	25	13.0	56.0	
	NVNV-M323-8	MVNV-M323-8	M32 x 1.5	23	25	8.0	51.0	
	NVNV-M329-13	MVNV-M329-13	M32 x 1.5	29	32	13.0	57.3	
	NVNV-M329-8	MVNV-M329-8	M32 x 1.5	29	32	8.0	52.3	
	NVNV-M409-13	MVNV-M409-13	M40 x 1.5	29	32	13.0	57.3	
	NVNV-M409-8	MVNV-M409-8	M40 x 1.5	29	32	8.0	52.3	
	NVNV-M406-13	MVNV-M406-13	M40 x 1.5	36	40	13.0	71.4	
	NVNV-M406-8	MVNV-M406-8	M40 x 1.5	36	40	8.0	66.4	
	NVNV-M506-14	MVNV-M506-14	M50 x 1.5	36	40	14.0	72.4	
	NVNV-M506-9	MVNV-M506-9	M50 x 1.5	36	40	9.0	67.4	
	<b>Approvals</b>	NVNV-M508-14	MVNV-M508-14	M50 x 1.5	48	50	14.0	72.4
		NVNV-M508-9	MVNV-M508-9	M50 x 1.5	48	50	9.0	67.4
		NVNV-M638-14	MVNV-M638-14	M63 x 1.5	48	50	14.0	72.4
		NVNV-M638-10	MVNV-M638-10	M63 x 1.5	48	50	10.0	68.4

For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

<sup>4</sup> IP68GT available. Please add  
"GT" prior to the thread length  
(for example NVNV-M120GT-10)

## Connectors NPT, metal thread

### Type VNV

#### Type VNV - Connector straight, metric metal thread

	Order no. IP68, black <sup>4</sup>	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVNV-N022	½"	12	16	15.4	48.1
	NVNV-N027	½"	17	20	15.4	56.4
	NVNV-N043	¾"	23	25	15.7	58.7
	NVNV-N069	1"	29	32	19.6	63.9
	NVNV-N076	1¼"	36	40	20.2	78.6
	NVNV-N088	1½"	48	50	20.6	79.0
	NVNV-N098	2"	48	50	21.4	79.8

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

<sup>4</sup> IP68GT available. Please add  
"GT" prior to the thread length  
(for example NVNV-N022GT)

## Connectors with strain relief, metric, metal thread

### Type VNZ

Type VNZ - Connector straight with strain relief, metric metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVNZ-M120S/P1	NVNZ-M120R/P	EK 150p7	M12 x 1.5	10	12	4.0–6.5	5.0	48.5
	NVNZ-M120S/P2		EK 150p8	M12 x 1.5	10	12	5.0–8.0	5.0	48.5
	NVNZ-M120S/P3		EK 150p9	M12 x 1.5	10	12	6.5–9.5	5.0	48.5
	NVNZ-M160S/P1	NVNZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	6.0	49.5
	NVNZ-M160S/P2		E 150p8	M16 x 1.5	10	12	5.0–8.0	6.0	49.5
	NVNZ-M160S/P3		E 150p9	M16 x 1.5	10	12	6.5–9.5	6.0	49.5
	NVNZ-M202S/P1	NVNZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	6.0	54.0
	NVNZ-M202S/P3		E 152p9	M20 x 1.5	12	16	6.5–9.5	6.0	54.0
	NVNZ-M202S/P4		E 152p11	M20 x 1.5	12	16	7.0–10.5	6.0	54.0
	NVNZ-M207S/P3	NVNZ-M207R/P	E 152p9	M20 x 1.5	17	20	6.5–9.5	6.5	60.0
	NVNZ-M207S/P4		E 152p11	M20 x 1.5	17	20	7.0–10.5	6.5	60.0
	NVNZ-M207S/P5		E 152p13	M20 x 1.5	17	20	9.0–13.0	6.5	60.0
	NVNZ-M253S/P5	NVNZ-M253R/P	EK 154p13	M25 x 1.5	23	25	9.0–13.0	7.5	72.5
	NVNZ-M253S/P6		EK 154p16	M25 x 1.5	23	25	11.5–15.5	7.5	72.5
	NVNZ-M257S/P4	NVNZ-M257R/P	E 153p11	M25 x 1.5	17	20	7.0–10.5	7.5	61.5
	NVNZ-M257S/P5		E 153p13	M25 x 1.5	17	20	9.0–13.0	7.5	61.5
	NVNZ-M257S/P6		E 153p16	M25 x 1.5	17	20	11.5–15.5	7.5	61.5
	NVNZ-M323S/P4	NVNZ-M323R/P	E 154p18	M32 x 1.5	23	25	14.0–18.0	8.0	73.0
	NVNZ-M323S/P5	NVNZ-M323R1/P	E 154p20	M32 x 1.5	23	25	17.0–20.5	8.0	73.0
	NVNZ-M329S/P2	NVNZ-M329R/P	EK 155p18	M32 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M329S/P3		EK 155p20	M32 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M329S/P4		EK 155p25	M32 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M406S/P1	NVNZ-M406R/P	E 156p25HF	M40 x 1.5	36	40	20.0–25.0	9.0	87.0
	NVNZ-M406S/P2		EK 156p28	M40 x 1.5	36	40	24.0–28.0	9.0	87.0
	NVNZ-M409S/P1	NVNZ-M409R/P	E 155p16	M40 x 1.5	29	32	11.5–15.5	8.0	73.0
	NVNZ-M409S/P2		E 155p18	M40 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M409S/P3		E 155p20	M40 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M409S/P4		E 155p25	M40 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M409S/P5		E 155p28	M40 x 1.5	29	32	24.0–28.0	8.0	73.0
	NVNZ-M506S/P1	NVNZ-M506R/P	E 156p32	M50 x 1.5	36	40	27.0–32.0	9.0	89.5
NVNZ-M506S/P3		E 156p36	M50 x 1.5	36	40	32.0–36.0	9.0	89.5	
NVNZ-M508S/P2	NVNZ-M508R/P	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	9.0	92.0	
NVNZ-M508S/P3		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	9.0	92.0	
NVNZ-M638S/P1	NVNZ-M638R/P	E 158pm1x35	M63 x 1.5	48	50	32.0–35.0	10.0	90.5	
NVNZ-M638S/P2		E 158p44	M63 x 1.5	48	50	39.0–44.0	10.0	90.5	

\*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available. R/P version of fitting has to be used in combination with multiple sealing inserts

⑤ IP68GT available. Please replace "S" or "R" with "GT" (e.g. NVNZ-M120GT/P1, NVNZ-M120GT/P)

## Fire barrier connectors with strain relief, metric, metal thread

### Type VNZ

Type VNZ - Fire barrier connector straight with strain relief, metric metal thread



	Order no. IP68 Compl., black ⑤	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
			NW	Metric			
	NVNZ-M120S/B1	M12 x 1.5	10	12	4.0–6.5	5.0	48.5
	NVNZ-M120S/B2	M12 x 1.5	10	12	5.0–8.0	5.0	48.5
	NVNZ-M120S/B3	M12 x 1.5	10	12	6.5–9.5	5.0	48.5
	NVNZ-M160S/B1	M16 x 1.5	10	12	4.0–6.5	6.0	49.5
	NVNZ-M160S/B2	M16 x 1.5	10	12	5.0–8.0	6.0	49.5
	NVNZ-M160S/B3	M16 x 1.5	10	12	6.5–9.5	6.0	49.5
	NVNZ-M202S/B1	M20 x 1.5	12	16	4.0–6.5	6.0	54.0
	NVNZ-M202S/B3	M20 x 1.5	12	16	6.5–9.5	6.0	54.0
	NVNZ-M202S/B4	M20 x 1.5	12	16	7.0–10.5	6.0	54.0
	NVNZ-M207S/B1	M20 x 1.5	17	20	4.0–6.5	6.5	60.0
	NVNZ-M207S/B2	M20 x 1.5	17	20	5.0–8.0	6.5	60.0
	NVNZ-M207S/B3	M20 x 1.5	17	20	6.5–9.5	6.5	60.0
	NVNZ-M207S/B4	M20 x 1.5	17	20	7.0–10.5	6.5	60.0
	NVNZ-M207S/B5	M20 x 1.5	17	20	9.0–13.0	6.5	60.0
	NVNZ-M253S/B5	M25 x 1.5	23	25	9.0–13.0	7.5	72.5
	NVNZ-M253S/B6	M25 x 1.5	23	25	11.5–15.5	7.5	72.5
	NVNZ-M257S/B4	M25 x 1.5	17	20	7.0–10.0	7.5	61.5
	NVNZ-M257S/B5	M25 x 1.5	17	20	9.0–13.0	7.5	61.5
	NVNZ-M257S/B6	M25 x 1.5	17	20	11.5–15.5	7.5	61.5
	NVNZ-M323S/B4	M32 x 1.5	23	25	14.0–18.0	8.0	73.0
	NVNZ-M323S/B5	M32 x 1.5	23	25	17.0–20.5	8.0	73.0
	NVNZ-M329S/B2	M32 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M329S/B3	M32 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M329S/B4	M32 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M406S/B1	M40 x 1.5	36	40	20.0–25.0	9.0	87.0
	NVNZ-M406S/B2	M40 x 1.5	36	40	24.0–28.0	9.0	87.0
	NVNZ-M409S/B1	M40 x 1.5	29	32	11.5–15.5	8.0	73.0
	NVNZ-M409S/B2	M40 x 1.5	29	32	14.0–18.0	8.0	73.0
	NVNZ-M409S/B3	M40 x 1.5	29	32	17.0–20.5	8.0	73.0
	NVNZ-M409S/B4	M40 x 1.5	29	32	20.0–25.0	8.0	73.0
	NVNZ-M409S/B5	M40 x 1.5	29	32	24.0–28.0	8.0	73.0
	NVNZ-M506S/B1	M50 x 1.5	36	40	27.0–32.0	9.0	89.5
	NVNZ-M506S/B3	M50 x 1.5	36	40	32.0–36.0	9.0	89.5
NVNZ-M508S/B2	M50 x 1.5	48	50	32.0–36.0	9.0	92.0	
NVNZ-M508S/B3	M50 x 1.5	48	50	36.0–40.0	9.0	92.0	
NVNZ-M638S/B1	M63 x 1.5	48	50	32.0–35.0	10.0	90.5	
NVNZ-M638S/B2	M63 x 1.5	48	50	39.0–44.0	10.0	90.5	

\*without insert

Fire barrier function, according to standard EN45545-2/-3

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from T80S

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: -40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available.

R/P version of fitting has to be used in combination with multiple sealing inserts

⑤ IP68GT available. Please  
replace "S" or "R" with "GT"  
(e.g. NVNZ-M120GT/P1,  
NVNZ-M120GT/P)

## Connectors with strain relief, metric, long metal thread

### Type VNZ

Type VNZ - Connector straight with strain relief, metric long metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
VNZ	NVNZ-M120S/P1-L	NVNZ-M120R/P-L	EK 150p7	M12 x 1.5	10	12	4.0–6.5	15.0	66.5
	NVNZ-M120S/P3-L			M12 x 1.5	10	12	6.5–9.5	15.0	66.5
	NVNZ-M160S/P1-L	NVNZ-M160R/P-L	E 150p7	M16 x 1.5	10	12	4.0–6.5	15.0	58.5
	NVNZ-M160S/P2-L		E 150p8	M16 x 1.5	10	12	5.0–8.0	15.0	58.5
	NVNZ-M160S/P3-L		E 150p9	M16 x 1.5	10	12	6.5–9.5	15.0	58.5
	NVNZ-M202S/P1-L	NVNZ-M202R/P-L	E 152p7	M20 x 1.5	12	16	4.0–6.5	15.0	62.5
	NVNZ-M202S/P3-L		E 152p9	M20 x 1.5	12	16	6.5–9.5	15.0	62.5
	NVNZ-M202S/P4-L		E 152p11	M20 x 1.5	12	16	7.0–10.5	15.0	62.5
	NVNZ-M207S/P3-L	NVNZ-M207R/P-L	E 152p9	M20 x 1.5	17	20	6.5–9.5	15.0	68.5
	NVNZ-M207S/P4-L		E 152p11	M20 x 1.5	17	20	7.0–10.5	15.0	68.5
	NVNZ-M207S/P5-L		E 152p13	M20 x 1.5	17	20	9.0–13.0	15.0	68.5
	NVNZ-M257S/P5-L	NVNZ-M257R/P-L	E 153p13	M25 x 1.5	17	20	9.0–13.0	15.0	69.0
	NVNZ-M257S/P6-L		E 153p16	M25 x 1.5	17	20	11.5–15.5	15.0	69.0
	NVNZ-M323S/P4-L	NVNZ-M323R/P-L	E 154p18	M32 x 1.5	23	25	14.0–18.0	15.0	80.0
	NVNZ-M323S/P5-L	NVNZ-M323R1/P-L	E 154p20	M32 x 1.5	23	25	17.0–20.5	15.0	80.0
	NVNZ-M329S/P2-L	NVNZ-M329R/P-L	E 155p18	M32 x 1.5	29	32	14.0–18.0	15.0	91.0
	NVNZ-M329S/P3-L		E 155p20	M32 x 1.5	29	32	17.0–20.5	15.0	91.0
	NVNZ-M409S/P3-L	NVNZ-M409R/P-L	E 155p20	M40 x 1.5	29	32	17.0–20.5	15.0	80.0
	NVNZ-M409S/P4-L		E 155p25	M40 x 1.5	29	32	20.0–25.0	15.0	80.0
	NVNZ-M409S/P5-L		E 155p28	M40 x 1.5	29	32	24.0–28.0	15.0	80.0
	NVNZ-M506S/P1-L	NVNZ-M506R/P-L	E 156p32	M50 x 1.5	36	40	27.0–32.0	15.0	94.5
	NVNZ-M506S/P3-L		E 156p36	M50 x 1.5	36	40	32.0–36.0	15.0	94.5
	NVNZ-M508S/P2-L	NVNZ-M508R/P-L	E 157p36HF	M50 x 1.5	48	50	32.0–36.0	15.0	97.0
	NVNZ-M508S/P3-L		E 157p40HF	M50 x 1.5	48	50	36.0–40.0	15.0	97.0
	NVNZ-M638S/P1-L	NVNZ-M638R/P-L	E 158pm1X35	M63 x 1.5	48	50	32.0–35.0	15.0	95.5
	NVNZ-M638S/P2-L		E 158p44	M63 x 1.5	48	50	39.0–44.0	15.0	95.5

\*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: –40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available

R/P version of fitting has to be used in combination with multiple sealing inserts

⑤ IP68GT available. Please replace “S” or “R” with “GT” (e.g. NVNZ-M120GT/P1-L)

## Connectors metric, metal thread

### Type VAV

#### Type VAV - Connector 45° elbow, metric metal thread

	Order no. IP68, black <sup>4</sup>	Order no. IP68, grey <sup>4</sup>	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVAV-M120-10	MVAV-M120-10	M12 x 1.5	10	12	10.0	48.5 x 37.0
	NVAV-M120-5	MVAV-M120-5	M12 x 1.5	10	12	5.0	43.5 x 37.0
	NVAV-M162-10	MVAV-M162-10	M16 x 1.5	12	16	10.0	53.0 x 40.5
	NVAV-M162-5	MVAV-M162-5	M16 x 1.5	12	16	5.0	48.0 x 40.5
	NVAV-M207-10	MVAV-M207-10	M20 x 1.5	17	20	10.0	60.5 x 51.5
	NVAV-M207-6	MVAV-M207-6	M20 x 1.5	17	20	6.0	56.5 x 51.5
	NVAV-M253-11	MVAV-M253-11	M25 x 1.5	23	25	11.0	70.0 x 60.5
	NVAV-M253-7	MVAV-M253-7	M25 x 1.5	23	25	7.0	66.0 x 60.5
	NVAV-M329-13	MVAV-M329-13	M32 x 1.5	29	32	13.0	77.0 x 68.0
	NVAV-M329-8	MVAV-M329-8	M32 x 1.5	29	32	8.0	72.0 x 68.0
	NVAV-M406-13	MVAV-M406-13	M40 x 1.5	36	40	13.0	94.0 x 87.5
	NVAV-M406-8	MVAV-M406-8	M40 x 1.5	36	40	8.0	89.0 x 87.5
	NVAV-M508-14	MVAV-M508-14	M50 x 1.5	48	50	14.0	102.0 x 101.0
	NVAV-M508-9	MVAV-M508-9	M50 x 1.5	48	50	9.0	97.0 x 101.0
	NVAV-M638-14	MVAV-M638-14	M63 x 1.5	48	50	14.0	102.0 x 104.0
NVAV-M638-10	MVAV-M638-10	M63 x 1.5	48	50	10.0	98.0 x 104.0	

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

<sup>4</sup> IP68GT available. Please add "GT" prior to the thread length (e.g. NVAV-M120GT-10, NVBV-M120GT-10)

## Connectors metric, metal thread

### Type VBV

#### Type VBV - Connector 90° curved elbow, metric metal thread

	Order no. IP68, black ⑤	Order no. IP68, grey ⑤	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVBV-M207-10	MVBV-M207-10	M20 x 1.5	17	20	10.0	51.0 x 73.0
	NVBV-M207-6	MVBV-M207-6	M20 x 1.5	17	20	6.0	47.0 x 73.0
	NVBV-M257-11	MVBV-M257-11	M25 x 1.5	17	20	11.0	52.0 x 76.0
	NVBV-M257-7	MVBV-M257-7	M25 x 1.5	17	20	7.0	48.0 x 76.0
	NVBV-M253-11	MVBV-M253-11	M25 x 1.5	23	25	11.0	62.5 x 85.0
	NVBV-M253-7	MVBV-M253-7	M25 x 1.5	23	25	7.0	58.5 x 85.0
	NVBV-M323-13	MVBV-M323-13	M32 x 1.5	23	25	13.0	64.5 x 89.0
	NVBV-M323-8	MVBV-M323-8	M32 x 1.5	23	25	8.0	59.5 x 89.0
	NVBV-M329-13	MVBV-M329-13	M32 x 1.5	29	32	13.0	74.0 x 94.5
	NVBV-M329-8	MVBV-M329-8	M32 x 1.5	29	32	8.0	69.0 x 94.5
	NVBV-M409-13	MVBV-M409-13	M40 x 1.5	29	32	13.0	75.5 x 100.5
	NVBV-M409-8	MVBV-M409-8	M40 x 1.5	29	32	8.0	70.5 x 100.5
	NVBV-M406-13	MVBV-M406-13	M40 x 1.5	36	40	13.0	86.5 x 123.0
	NVBV-M406-8	MVBV-M406-8	M40 x 1.5	36	40	8.0	81.5 x 123.0
	NVBV-M506-14	MVBV-M506-14	M50 x 1.5	36	40	14.0	87.5 x 130.0
	NVBV-M506-9	MVBV-M506-9	M50 x 1.5	36	40	9.0	82.5 x 130.0
	NVBV-M508-14	MVBV-M508-14	M50 x 1.5	48	50	14.0	100.5 x 135.0
	NVBV-M508-9	MVBV-M508-9	M50 x 1.5	48	50	9.0	95.5 x 135.0
	NVBV-M638-10	MVBV-M638-10	M63 x 1.5	48	50	14.0	100.5 x 138.0
NVBV-M638-14	MVBV-M638-14	M63 x 1.5	48	50	10.0	96.5 x 138.0	

#### Approvals



For applications in railway vehicles and heavy machine construction

High thread and system connection strength

Smooth elbow allows easy threading of wires and cables

**Note:** Appropriate standard elbows of type VW are available for smaller conduit sizes NW 10 to NW 12

⑤ IP68GT available. Please add "GT" prior to the thread length (e.g. NVAV-M120GT-10, NVBV-M120GT-10)

## Connectors metric, metal thread

### Type VWV

#### Type VWV - Connector 90° elbow, metric metal thread

	Order no. IP68, black <sup>④</sup>	Order no. IP68, grey <sup>④</sup>	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVWV-M120-10	MVWV-M120-10	M12 x 1.5	10	12	10.0	37.5 x 39.5
	NVWV-M120-5	MVWV-M120-5	M12 x 1.5	10	12	5.0	32.5 x 39.5
	NVWV-M160-10	MVWV-M160-10	M16 x 1.5	10	12	10.0	37.5 x 41.5
	NVWV-M160-5	MVWV-M160-5	M16 x 1.5	10	12	5.0	32.5 x 41.5
	NVWV-M162-10	MVWV-M162-10	M16 x 1.5	12	16	10.0	42.0 x 46.5
	NVWV-M162-5	MVWV-M162-5	M16 x 1.5	12	16	5.0	37.0 x 46.5
	NVWV-M202-10	MVWV-M202-10	M20 x 1.5	12	16	10.0	42.0 x 49.0
	NVWV-M202-6	MVWV-M202-6	M20 x 1.5	12	16	6.0	38.0 x 49.0
	NVWV-M207-10	MVWV-M207-10	M20 x 1.5	17	20	10.0	47.0 x 58.5
	NVWV-M207-6	MVWV-M207-6	M20 x 1.5	17	20	6.0	43.0 x 58.5
	NVWV-M253-11	MVWV-M253-11	M25 x 1.5	23	25	11.0	59.0 x 67.0
	NVWV-M253-7	MVWV-M253-7	M25 x 1.5	23	25	7.0	55.0 x 67.0
	NVWV-M329-13	MVWV-M329-13	M32 x 1.5	29	32	13.0	68.0 x 74.5
	NVWV-M329-8	MVWV-M329-8	M32 x 1.5	29	32	8.0	63.0 x 74.5
	NVWV-M406-13	MVWV-M406-13	M40 x 1.5	36	40	13.0	80.5 x 98.0
	NVWV-M406-8	MVWV-M406-8	M40 x 1.5	36	40	8.0	75.5 x 98.0
	NVWV-M508-14	MVWV-M508-14	M50 x 1.5	48	50	14.0	95.5 x 111.0
	NVWV-M508-9	MVWV-M508-9	M50 x 1.5	48	50	9.0	90.5 x 111.0
NVWV-M638-14	MVWV-M638-14	M63 x 1.5	48	50	14.0	94.5 x 114.0	
NVWV-M638-10	MVWV-M638-10	M63 x 1.5	48	50	10.0	90.5 x 114.0	

#### Approvals



For applications in railway vehicles and heavy machine construction

High thread and system connection strength

**Note:** Curved elbows of type VB are also available for sizes NW 17 to NW 48

<sup>④</sup> IP68GT available. Please add  
"GT" prior to the thread length  
(e.g. NVWV-M120GT-10)

## Connectors with strain relief, metric, metal thread

### Type VWZ

Type VWZ - Connector 90° elbow with strain relief, metric metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread metric	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVWZ-M160S/P1	NVWZ-M160R/P	E 150p7	M16 x 1.5	10	12	4.0–6.5	8.0	65.0
	NVWZ-M160S/P2	–	E 150p8	M16 x 1.5	10	12	5.0–8.0	8.0	65.0
	NVWZ-M160S/P3	–	E 150p9	M16 x 1.5	10	12	6.5–9.5	8.0	65.0
	NVWZ-M202S/P1	NVWZ-M202R/P	E 152p7	M20 x 1.5	12	16	4.0–6.5	8.0	74.5
	NVWZ-M202S/P3	–	E 152p9	M20 x 1.5	12	16	6.5–9.5	8.0	74.5
	NVWZ-M202S/P4	–	E 152p11	M20 x 1.5	12	16	7.0–10.5	8.0	74.5
	NVWZ-M207S/P1	NVWZ-M207R/P	E 152p7	M20 x 1.5	17	20	4.0–6.5	8.0	81.0
	NVWZ-M207S/P3	–	E 152p9	M20 x 1.5	17	20	6.5–9.5	8.0	81.0
	NVWZ-M207S/P4	–	E 152p11	M20 x 1.5	17	20	7.0–10.5	8.0	81.0
	NVWZ-M207S/P5	–	E 152p13	M20 x 1.5	17	20	9.0–13.0	8.0	81.0
	NVWZ-M257S/P5	NVWZ-M257R/P	E 153p13	M25 x 1.5	17	20	9.0–13.0	8.0	84.0
	NVWZ-M257S/P6	–	E 153p16	M25 x 1.5	17	20	11.5–15.5	8.0	84.0

\*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Straight connector: Specially formulated polyamide 6

90° elbow: Zinc diecast

Female thread and locknut: Nickel-plated brass

Pflitsch sealing insert: TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: –40°C to +135°C

⑤ IP68GT available. Please  
replace “S” or “R” with “GT”  
(e.g. NVWZ-M160GT/P1)

## Connectors PG, polyamide thread

### Type VN

Type VN - Connector straight, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVND-P07MGT-11	BVNV-P07M	07	07	10	11.0	34.5
	BVND-P07MGT-8	-	07	07	10	8.0	31.5
	BVND-P070GT-11	BVNV-P070	07	10	12	11.0	36.5
	BVND-P070GT-8	-	07	10	12	8.0	33.5
	BVND-P072GT-11	BVNV-P072	07	12	16	11.0	39.0
	BVND-P072GT-8	-	07	12	16	8.0	36.0
	BVND-P09MGT-11	BVNV-P09M	09	07	10	11.0	34.5
	BVND-P09MGT-8	-	09	07	10	8.0	31.5
	BVND-P090GT-11	BVNV-P090	09	10	12	11.0	36.5
	BVND-P090GT-8	-	09	10	12	8.0	33.5
	BVND-P092GT-11	BVNV-P092	09	12	16	11.0	39.0
	BVND-P092GT-8	-	09	12	16	8.0	36.0
	BVND-P097GT-11	BVNV-P097	09	17	20	11.0	47.5
	BVND-P097GT-8	-	09	17	20	8.0	44.5
	BVND-P11MGT-11	BVNV-P11M	11	07	10	11.0	34.5
	BVND-P11MGT-8	-	11	07	10	8.0	31.5
	BVND-P110GT-11	BVNV-P110	11	10	12	11.0	36.5
	BVND-P110GT-8	-	11	10	12	8.0	33.5
	BVND-P112GT-11	BVNV-P112	11	12	16	11.0	39.0
	BVND-P112GT-8	-	11	12	16	8.0	36.0
	BVND-P117GT-11	BVNV-P117	11	17	20	11.0	47.5
	BVND-P117GT-8	-	11	17	20	8.0	44.5
	BVND-P13MGT-11	BVNV-P13M	13.5	07	10	11.0	34.5
	BVND-P13MGT-8	-	13.5	07	10	8.0	31.5
	BVND-P130GT-11	BVNV-P130	13.5	10	12	11.0	36.5
	BVND-P130GT-8	-	13.5	10	12	8.0	33.5
	BVND-P132GT-11	BVNV-P132	13.5	12	16	11.0	39.0
	BVND-P132GT-8	-	13.5	12	16	8.0	36.0
	BVND-P137GT-11	BVNV-P137	13.5	17	20	11.0	47.5
	BVND-P137GT-8	-	13.5	17	20	8.0	44.5
	BVND-P160GT-11	-	16	10	12	11.0	36.5
	BVND-P160GT-8	-	16	10	12	8.0	33.5
	BVND-P162GT-11	BVNV-P162	16	12	16	11.0	39.0
	BVND-P163GT-11	BVNV-P163	16	23	25	11.0	51.0
	BVND-P163GT-8	-	16	23	25	8.0	48.0
	BVND-P167GT-11	BVNV-P167	16	17	20	11.0	47.5
	BVND-P167GT-8	-	16	17	20	8.0	44.5
	BVND-P213GT	BVNV-P213	21	23	25	12.0	52.0
	BVND-P296GT	BVNV-P296	29	36	40	12.0	67.5
	BVND-P299GT	BVNV-P299	29	29	32	12.0	53.0
BVND-P366GT	BVNV-P366	36	36	40	13.0	66.0	
BVND-P368GT	BVNV-P368	36	48	50	13.0	68.5	
BVND-P428GT	BVNV-P428	42	48	50	13.0	68.5	
BVND-P488GT	BVNV-P488	48	48	50	13.0	66.5	

#### Approvals



① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

For cable protection systems in a wide range of applications

## Connectors PG, polyamide thread

### Type VNDZ/VNZ & VA

#### Type VNDZ/VNZ - Connector straight with strain relief, PG thread

	Order no. IP66 ①	Order no. IP68 ① ③	Thread PG	Fits to conduit size		Terminal range	Thread length (mm)	Overall length (mm)
				NW	Metric			
	BVNDZ-P090GT	BVNZ-P090S	09	10	12	4.0–8.0	7.5	56.0
	BVNDZ-P112GT	BVNZ-P112S	11	12	16	5.0–10.0	8.0	60.5
	BVNDZ-P132GT	BVNZ-P132S	13.5	12	16	6.0–12.0	9.0	62.0
	BVNDZ-P137GT	BVNZ-P137S	13.5	17	20	6.0–12.0	9.0	69.0
	BVNDZ-P167GT	BVNZ-P167S	16	17	20	10.0–14.0	10.0	72.0
	BVNDZ-P163GT	BVNZ-P163S	16	23	25	10.0–14.0	10.0	79.0
	BVNDZ-P213GT	BVNZ-P213S	21	23	25	13.0–18.0	11.0	82.0
	BVNDZ-P299GT	BVNZ-P299S	29	29	32	18.0–25.0	11.0	85.0
	BVNDZ-P366GT	BVNZ-P366S	36	36	40	22.0–32.0	13.0	112.0
	BVNDZ-P488GT	BVNZ-P488S	48	48	50	34.0–44.0	14.0	112.0

For machine and plant construction

For separation of damp and dry areas

Integrated strain relief optimally holds and seals cables

If several conductors are used with the connector multiple sealing inserts should be considered

**Note:** For several conductors multiple sealing inserts MDE are available

#### Type VA - Connector 45° elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVAD-P090GT	BVAV-P090	09	10	12	11.0	43.5 x 37.0
	BVAD-P112GT	BVAV-P112	11	12	16	11.0	48.0 x 40.0
	BVAD-P132GT	BVAV-P132	13.5	12	16	11.0	48.0 x 41.5
	BVAD-P137GT	BVAV-P137	13.5	17	20	11.0	55.5 x 51.5
	BVAD-P167GT	BVAV-P167	16	17	20	11.0	55.5 x 51.5
	BVAD-P213GT	BVAV-P213	21	23	25	11.0	63.0 x 58.0
	BVAD-P299GT	BVAV-P299	29	29	32	12.0	69.0 x 66.0
	BVAD-P366GT	BVAV-P366	36	36	40	13.0	86.0 x 86.0
	BVAD-P488GT	BVAV-P488	48	48	50	13.0	94.0 x 100.0

#### Approvals



For cable protection systems in a wide range of applications

① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

③ IP68GT available. Please replace "S" at the end with "GT" (e.g. BVNZ-P167GT).

## Connectors PG, polyamide thread

### Type VB

#### Type VB - Connector 90° curved elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVBD-P167GT	BVBV-P167	16	17	20	11.0	47.5 x 73.0
	BVBD-P213GT	BVBV-P213	21	23	25	12.0	57.5 x 85.0
	BVBD-P299GT	BVBV-P299	29	29	32	12.0	67.5 x 96.0
	BVBD-P366GT	BVBV-P366	36	36	40	13.0	79.0 x 123.0
	BVBD-P488GT	BVBV-P488	48	48	50	13.0	92.5 x 135.0

#### Approvals



For cable protection systems in a wide range of applications  
Smooth elbow allows easy threading of wires and cables

**Note:** For smaller conduit sizes NW 07 to NW 12 appropriate standard elbows of type VW are also available

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

## Connectors PG, polyamide thread

### Type VW

#### Type VW - Connector 90° elbow, PG thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-P07MGT-11	BVWV-P07M	07	07	10	11.0	32.0 x 35.0
	BVWD-P07MGT-8	-	07	07	10	8.0	29.0 x 35.0
	BVWD-P070GT-11	BVWV-P070	07	10	12	11.0	34.0 x 39.5
	BVWD-P070GT-8	-	07	10	12	8.0	31.0 x 39.5
	BVWD-P072GT-11	BVWV-P072	07	12	16	11.0	38.5 x 44.5
	BVWD-P072GT-8	-	07	12	16	8.0	35.5 x 44.5
	BVWD-P09MGT-11	BVWV-P09M	09	07	10	11.0	32.0 x 36.5
	BVWD-P09MGT-8	-	09	07	10	8.0	29.0 x 36.5
	BVWD-P090GT-11	BVWV-P090	09	10	12	11.0	34.0 x 39.5
	BVWD-P090GT-8	-	09	10	12	8.0	31.0 x 39.5
	BVWD-P092GT-11	BVWV-P092	09	12	16	11.0	38.5 x 44.5
	BVWD-P092GT-8	-	09	12	16	8.0	35.5 x 44.5
	BVWD-P11MGT-11	BVWV-P11M	11	07	10	11.0	32.0 x 38.0
	BVWD-P11MGT-8	-	11	07	10	8.0	29.0 x 38.0
	BVWD-P110GT-11	BVWV-P110	11	10	12	11.0	34.0 x 41.0
	BVWD-P110GT-8	-	11	10	12	8.0	31.0 x 41.0
	BVWD-P112GT-11	BVWV-P112	11	12	16	11.0	38.5 x 46.0
	BVWD-P112GT-8	-	11	12	16	8.0	35.5 x 46.0
	BVWD-P13MGT-11	BVWV-P13M	13.5	07	10	11.0	32.0 x 39.5
	BVWD-P13MGT-8	-	13.5	07	10	8.0	29.0 x 39.5
	BVWD-P130GT-11	BVWV-P130	13.5	10	12	11.0	34.0 x 42.5
	BVWD-P130GT-8	-	13.5	10	12	8.0	31.0 x 42.5
	BVWD-P132GT-11	BVWV-P132	13.5	12	16	11.0	38.5 x 47.5
	BVWD-P132GT-8	-	13.5	12	16	8.0	35.5 x 47.5
	BVWD-P137GT-11	BVWV-P137	13.5	17	20	11.0	43.5 x 58.5
	BVWD-P137GT-8	-	13.5	17	20	8.0	40.5 x 58.5
	BVWD-P167GT-11	BVWV-P167	16	17	20	11.0	43.5 x 58.5
	BVWD-P167GT-8	-	16	17	20	8.0	40.5 x 58.5
	BVWD-P213GT	BVWV-P213	21	23	25	12.0	54.0 x 67.0
	BVWD-P299GT	BVWV-P299	29	29	32	12.0	61.5 x 74.5
	BVWD-P366GT	BVWV-P366	36	36	40	13.0	72.0 x 98.0
	BVWD-P488GT	BVWV-P488	48	48	50	13.0	85.5 x 111.0

#### Approvals



For cable protection systems in a wide range of applications

**Note:** For sizes NW 17 to NW 48 curved elbows of type VB are also available

- ① Please replace "B" for black with "S" for grey in front of the order no.
- ② IP68GT available. Please add "GT" after the order no.

## Connectors PG, metal thread

### Type VNV

#### Type VNV - Connector straight, PG metal thread

	Order no. IP68, black <sup>②</sup>	Order no. IP68, grey <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	NVNV-P090	MVNV-P090	09	10	12	12.0	42.0
	NVNV-P112	MVNV-P112	11	12	16	12.0	45.0
	NVNV-P137	MVNV-P137	13.5	17	20	13.0	54.0
	NVNV-P167	MVNV-P167	16	17	20	13.0	54.0
	NVNV-P213	MVNV-P213	21	23	25	14.0	57.0
	NVNV-P293	MVNV-P293	29	23	25	14.0	57.0
	NVNV-P299	MVNV-P299	29	29	32	14.0	58.5
	NVNV-P366	MVNV-P366	36	36	40	17.0	75.5
	NVNV-P488	MVNV-P488	48	48	50	17.0	75.5

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

<sup>②</sup> IP68GT available. Please add  
"GT" after the order no.

## Connectors PG, with strain relief, metal thread

### Type VNZ

Type VNZ - Connector straight with strain relief, PG metal thread



	Order no. IP68 Compl., black ⑤	Order no. fitting* ⑤	Order no. insert	Thread PG	Fits to conduit size		Terminal range (mm)	Thread length (mm)	Overall length (mm)
					NW	Metric			
	NVNZ-P090S/P1	NVNZ-P090R/P	E 150p7	09	10	12	4.0–6.5	6.0	49.5
	NVNZ-P090S/P3	–	E 150p9	09	10	12	6.5–9.5	6.0	49.5
	NVNZ-P110S/P1	NVNZ-P110R/P	E 151p7	11	10	12	4.0–6.5	6.0	52.0
	NVNZ-P110S/P3	–	E 151p9	11	10	12	6.5–9.5	6.0	52.0
	NVNZ-P112S/P1	NVNZ-P112R/P	E 151p7	11	12	16	4.0–6.5	6.0	53.5
	NVNZ-P112S/P3	–	E 151p9	11	12	16	6.5–9.5	6.0	53.5
	NVNZ-P112S/P4	–	E 151p11	11	12	16	7.0–10.5	6.0	53.5
	NVNZ-P160S/P1	NVNZ-P160R/P	E 152p11	16	10	12	4.0–6.5	6.5	52.5
	NVNZ-P167S/P3	NVNZ-P167R/P	E 153p9	16	17	20	6.5–9.5	6.5	61.0
	NVNZ-P167S/P4	–	E 153p11	16	17	20	7.0–10.5	6.5	61.0
	NVNZ-P167S/P5	–	E 153p13	16	17	20	9.0–13.0	6.5	61.0
	NVNZ-P167S/P6	–	E 153p16	16	17	20	11.5–15.5	6.5	61.0
	NVNZ-P213S/P1	NVNZ-P213R/P	E 154p11	21	23	25	7.0–10.5	7.0	72.0
	NVNZ-P213S/P4	–	E 154p18	21	23	25	14.0–18.0	7.0	72.0
	NVNZ-P213S/P5	NVNZ-P213R1/P	E 154p20	21	23	25	17.0–20.5	7.0	72.0
	NVNZ-P299S/P3	NVNZ-P299R/P	E 155p20	29	29	32	17.0–20.5	8.0	73.5
	NVNZ-P299S/P4	–	E 155p25	29	29	32	20.0–25.0	8.0	73.5
	NVNZ-P299S/P5	–	E 155p28	29	29	32	24.0–28.0	8.0	73.5
	NVNZ-P366S/P1	NVNZ-P366R/P	E 156p32	36	36	40	27.0–32.0	9.0	88.0
	NVNZ-P366S/P2	–	E 156p34	36	36	40	29.0–34.0	9.0	88.0
NVNZ-P366S/P3	–	E 156p36	36	36	40	32.0–36.0	9.0	88.0	
NVNZ-P488S/P1	NVNZ-P488R/P	E 158pm 1x35	48	48	50	32.0–35.0	10.0	90.5	
NVNZ-P488S/P2	–	E 158p44	48	48	50	39.0–44.0	10.0	90.5	

\*without insert

For applications in railway vehicles and heavy machine construction

For the separation of damp and dry areas

Sealing inserts are made from TPE-V

With integrated strain relief and optimal ingress protection at the cable (up to IP68/10 bar)

High thread and system connection strength

Temperature range sealing insert Pflitsch: –40°C to +135°C

**Note:** For several conductors multiple sealing inserts MDE are available

R/P version of fitting has to be used in combination with multiple sealing inserts

## Connectors PG, metal thread

### Type VAV & VBV

#### Type VAV - Connector 45° elbow, PG metal thread

	Order no. IP68, black <sup>②</sup>	Order no. IP68, grey <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVAV-P090	MVAV-P090	09	10	12	12.0	50.5 x 37.0
	NVAV-P112	MVAV-P112	11	12	16	12.0	55.0 x 40.5
	NVAV-P137	MVAV-P137	13.5	17	20	13.0	63.5 x 50.0
	NVAV-P167	MVAV-P167	16	17	20	13.0	63.5 x 50.0
	NVAV-P213	MVAV-P213	21	23	25	14.0	73.0 x 60.5
	NVAV-P299	MVAV-P299	29	29	32	14.0	78.0 x 68.0
	NVAV-P366	MVAV-P366	36	36	40	17.0	98.0 x 87.5
	NVAV-P488	MVAV-P488	48	48	50	17.0	105.0 x 101.0

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

#### Type VBV - Connector 90° curved elbow, PG metal thread

	Order no. IP68, black <sup>②</sup>	Order no. IP68, grey <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVBV-P167	MVBV-P167	16	17	20	13.0	54.0 x 73.0
	NVBV-P213	MVBV-P213	21	23	25	14.0	65.5 x 85.0
	NVBV-P299	MVBV-P299	29	29	32	14.0	75.0 x 96.0
	NVBV-P366	MVBV-P366	36	36	40	17.0	90.5 x 123.0
	NVBV-P488	MVBV-P488	48	48	50	17.0	103.5 x 135.0

#### Approvals



For applications in railway vehicles and heavy machine construction  
High thread and system connection strength

Smooth elbow allows easy threading of wires and cables

**Note:** For smaller conduit sizes NW 10 to NW 12 appropriate standard elbows of type VW are also available

<sup>②</sup> IP68GT available. Please add  
"GT" after the order no.

## Connectors PG, metal thread

### Type VWV

#### Type VWV - Connector 90° elbow, PG metal thread

	Order no. IP68, black <sup>②</sup>	Order no. IP68, grey <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	NVWV-P090	MVWV-P090	09	10	12	12.0	39.5 x 39.5
	NVWV-P112	MVWV-P112	11	12	16	12.0	45.5 x 45.0
	NVWV-P137	MVWV-P137	13.5	17	20	13.0	50.0 x 58.5
	NVWV-P167	MVWV-P167	16	17	20	13.0	50.0 x 58.5
	NVWV-P213	MVWV-P213	21	23	25	14.0	62.0 x 67.0
	NVWV-P299	MVWV-P299	29	29	32	14.0	69.0 x 74.5
	NVWV-P366	MVWV-P366	36	36	40	17.0	83.5 x 98.0
	NVWV-P488	MVWV-P488	48	48	50	17.0	96.5 x 111.0

#### Approvals



For applications in railway vehicles and heavy machine construction

High thread and system connection strength

**Note:** Curved elbows of type VB are also available for sizes NW 17 to NW 48

<sup>②</sup> IP68GT available. Please add  
"GT" after the order no.

## Connectors GAS, polyamide thread

### Type VN & VW

#### Type VN - Connector straight, GAS thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread GAS	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-G00MGT	BVNV-G00M	¼"	07	10	11.0	34.5
	BVND-G000GT	BVNV-G000	¼"	10	12	11.0	36.5
	BVND-G010GT	BVNV-G010	⅜"	10	12	11.0	36.5
	BVND-G012GT	BVNV-G012	⅜"	12	16	11.0	39.0
	BVND-G022GT	BVNV-G022	½"	12	16	13.0	41.0
	BVND-G027GT	BVNV-G027	½"	17	20	13.0	49.5
	BVND-G043GT	BVNV-G043	¾"	23	25	14.0	54.0
	BVND-G069GT	BVNV-G069	1"	29	32	15.0	56.0
	BVND-G076GT	BVNV-G076	1¼"	36	40	18.0	71.0
	BVND-G088GT	BVNV-G088	1½"	48	50	18.0	71.5
	BVND-G098GT	BVNV-G098	2"	48	50	18.0	71.5

For cable protection systems in a wide range of applications

#### Type VW - Connector 90° elbow, GAS thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread GAS	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-G00MGT	BVWV-G00M	¼"	07	10	11.0	32.0 x 36.5
	BVWD-G000GT	BVWV-G000	¼"	10	12	11.0	34.0 x 39.5
	BVWD-G010GT	BVWV-G010	⅜"	10	12	11.0	34.0 x 40.5
	BVWD-G012GT	BVWV-G012	⅜"	12	16	11.0	38.5 x 46.0
	BVWD-G022GT	BVWV-G022	½"	12	16	13.0	40.5 x 47.5
	BVWD-G027GT	BVWV-G027	½"	17	20	13.0	45.5 x 58.5
	BVWD-G043GT	BVWV-G043	¾"	23	25	14.0	56.0 x 66.5
	BVWD-G069GT	BVWV-G069	1"	29	32	15.0	64.5 x 73.5
	BVWD-G076GT	BVWV-G076	1¼"	36	40	18.0	77.0 x 96.0
	BVWD-G088GT	BVWV-G088	1½"	48	50	18.0	90.5 x 106.0
	BVWD-G098GT	BVWV-G098	2"	48	50	18.0	90.5 x 111.0

For cable protection systems in a wide range of applications

① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

## Connectors NPT, polyamide thread

### Type VN & VA

#### Type VN - Connector straight, NPT thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVND-N022GT	BVNV-N022	½"	12	16	13.0	41.5
	BVND-N027GT	BVNV-N027	½"	17	20	13.0	49.5
	BVND-N043GT	BVNV-N043	¾"	23	25	14.0	54.0
	BVND-N069GT	BVNV-N069	1"	29	32	15.0	56.0
	BVND-N076GT	BVNV-N076	1¼"	36	40	18.0	71.0
	BVND-N088GT	BVNV-N088	1½"	48	50	18.0	71.5
	BVND-N098GT	BVNV-N098	2"	48	50	18.0	71.5

#### Approvals



For cable protection systems in a wide range of applications

#### Type VA - Connector 45° elbow, NPT thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVAD-N022GT	BVAV-N022	½"	12	16	13.0	50.0 x 41.5
	BVAD-N027GT	BVAV-N027	½"	17	20	13.0	57.5 x 51.5
	BVAD-N043GT	BVAV-N043	¾"	23	25	14.0	67.0 x 60.0
	BVAD-N069GT	BVAV-N069	1"	29	32	15.0	73.5 x 67.0
	BVAD-N076GT	BVAV-N076	1¼"	36	40	18.0	91.5 x 85.5
	BVAD-N088GT	BVAV-N088	1½"	48	50	18.0	99.0 x 96.0
	-	BVAV-N098	2"	48	50	18.0	99.0 x 101.0

#### Approvals



For cable protection systems in a wide range of applications

- ① Please replace "B" for black with "S" for grey in front of the order no.  
 ② IP68GT available. Please add "GT" after the order no.

## Connectors NPT, polyamide thread

### Type VW

#### Type VW - Connector 90° elbow, NPT thread

	Order no. IP66 ①	Order no. IP68 ① ②	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	BVWD-N022GT	BVWV-N022	½"	12	16	13.0	40.5 x 47.5
	BVWD-N027GT	BVWV-N027	½"	17	20	13.0	45.5 x 58.5
	BVWD-N043GT	BVWV-N043	¾"	23	25	14.0	56.0 x 66.5
	BVWD-N069GT	BVWV-N069	1"	29	32	15.0	64.5 x 73.5
	BVWD-N076GT	BVWV-N076	1¼"	36	40	18.0	77.0 x 96.0
	BVWD-N088GT	BVWV-N088	1½"	48	50	18.0	90.5 x 106.0
	BVWD-N098GT	BVWV-N098	2"	48	50	18.0	90.5 x 111.0

#### Approvals



For applications in railway vehicles and heavy machine construction

High thread and system connection strength

**Note:** Curved elbows of type VB are also available for sizes NW 17 to NW 48

① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" after the order no.

## Swivel connectors, metric/PG/NPT metal thread

### Type SBV & SWV/SBV

#### Type SBV - Swivel connector 90° curved elbow, metric/PG metal thread

	Order no. IP68, black <sup>4</sup>	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
	NSBV-M207-10	M20 x 1.5	17	20	10.0	62.5 x 74.5
	NSBV-M253-11	M25 x 1.5	23	25	11.0	73.0 x 87.5
	NSBV-M329-13	M32 x 1.5	29	32	13.0	86.5 x 98.0
	NSBV-M406-13	M40 x 1.5	36	40	13.0	98.5 x 127.5
	NSBV-M409-13	M40 x 1.5	29	32	13.0	86.5 x 98.0
	NSBV-M508-14	M50 x 1.5	48	50	14.0	113.5 x 139.0
	NSBV-M638-14	M63 x 1.5	48	50	14.0	110.0 x 139.0

	Order no. IP68, black <sup>4</sup>	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
<b>Approvals</b>  	NSBV-P167-6.5	16	17	20	6.5	58.0 x 74.5
	NSBV-P213-7	21	23	25	7.0	69.0 x 87.5
	NSBV-P299-8	29	29	32	8.0	80.0 x 98.0
	NSBV-P366-9	36	36	40	9.0	91.5 x 127.5
	NSBV-P488-10	48	48	50	10.0	106.0 x 139.0

For applications with high technical requirements mainly in machine building  
 Suitable for occasional rotation  
 Thread and integrated swivel adapter made from nickel-plated brass  
 High thread and system connection strength  
 Smooth elbow allows easy threading of wires and cables

#### Type SWV/SBV - Swivel connector 90° curved elbow, NPT metal thread

	Order no. IP68, black <sup>4</sup>	Thread NPT	Fits to conduit size		Thread length (mm)	External dimensions (mm)
			NW	Metric		
	NSWV-N022/01	½"	12	16	15.4	57.0 x 48.5
	NSBV-N027/01	½"	17	20	15.4	66.5 x 74.5
	NSBV-N043/01	¾"	23	25	15.7	77.5 x 87.5
	NSBV-N069/01	1"	29	32	19.6	92.0 x 98.0
	NSBV-N076/01	1¼"	36	40	20.2	104.5 x 125.5
	NSBV-N088/01	1½"	48	50	20.6	118.5 x 138.5
	NSBV-N098/01	2"	48	50	21.4	119.5 x 138.5

#### Approvals



For applications with high technical requirements mainly in heavy machine building and rail applications  
 Suitable for occasional rotation  
 Thread and integrated swivel adapter made from colourless anodized aluminium  
 High thread and system connection strength  
 Smooth elbow allows easy threading of wires and cables

<sup>4</sup> IP68GT available. Please add  
 "GT" prior to the thread length  
 (for example NSBV-M329GT-13)

## Swivel connectors, metric/NPT metal thread

### Type SNV

#### Type SNV - Swivel connector, straight, IP68 metric metal thread

	Order no. IP68, black <sup>4</sup>	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNV-M120-10	M12 x 1.5	10	12	10.0	50.5
	NSNV-M162-10	M16 x 1.5	12	16	10.0	53.5
	NSNV-M207-10	M20 x 1.5	17	20	10.0	62.5
	NSNV-M253-11	M25 x 1.5	23	25	11.0	67.5
	NSNV-M329-13	M32 x 1.5	29	32	13.0	72.0
	NSNV-M329-7	M32 x 1.5	29	32	7.0	66.0
	NSNV-M406-13	M40 x 1.5	36	40	13.0	85.5
	NSNV-M406-7	M40 x 1.5	36	40	7.0	79.5
	NSNV-M409-13	M40 x 1.5	29	32	13.0	72.0
	NSNV-M508-14	M50 x 1.5	48	50	14.0	87.5
NSNV-M638-14	M63 x 1.5	48	50	14.0	84.0	

#### Approvals



For applications in railway vehicles and heavy machine construction  
 Specially formulated polyamide 6  
 Thread and integrated swivel adapter made from nickel-plated brass  
 Very high impact resistance. High thread and system connection strength. Suitable for occasional rotation  
 Easy introduction of wires and cables  
 Vibration-proof connection to PMAFLEX conduits  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits both conduit profiles – fine (T) and coarse (G)  
 IP68, IP69

#### Type SNV - Swivel connector, straight, NPT metal thread

	Order no. IP68, black <sup>4</sup>	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNV-N022/01	½"	12	16	15.4	58.0
	NSNV-N027/01	½"	17	20	15.4	66.5
	NSNV-N043/01	¾"	23	25	15.7	72.0
	NSNV-N069/01	1"	29	32	19.6	77.5
	NSNV-N076/01	1¼"	36	40	20.2	91.5
	NSNV-N088/01	1½"	48	50	20.6	92.0
	NSNV-N098/01	2"	48	50	21.4	93.0

#### Approvals



For applications with high technical requirements mainly in machine building  
 Specially formulated polyamide 6  
 Thread and integrated swivel adapter made from colourless anodized aluminium  
 Very high impact resistance. High thread and system connection strength. Suitable for occasional rotation  
 Easy introduction of wires and cables  
 Vibration-proof connection to PMAFLEX conduits  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits both conduit profiles – fine (T) and coarse (G)  
 IP68, IP69

<sup>4</sup> IP68GT available. Please add "GT" prior to the thread length (for example NSBV-M329GT-13)

## Swivel connectors with female NPT metal thread

### Type SNIV & SBIV

#### Type SNIV - Swivel connector straight, female NPT metal thread, IP68

	Order no. black <sup>4</sup>	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSNIV-N022/01	½"	12	16	13.6	59.0
	NSNIV-N027/01	½"	17	20	13.6	67.0
	NSNIV-N043/01	¾"	23	25	14.1	72.5
	NSNIV-N069/01	1"	29	32	16.8	76.5
	NSNIV-N076/01	1¼"	36	40	17.3	91.5
	NSNIV-N088/01	1½"	48	50	17.3	93.5
	NSNIV-N098/01	2"	48	50	17.8	93.0

#### Approvals



For applications with high technical requirements mainly in machine building

#### Type SBIV - 360° Swivel connector, 90° curved elbow, IP68, female NPT metal thread

	Order no. IP68, black <sup>4</sup>	Thread NPT	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NSWIV-N022/01	½"	12	16	13.6	48.5 x 46.5
	NSBIV-N027/01	½"	17	20	13.6	67.0 x 74.5
	NSBIV-N043/01	¾"	23	25	14.1	78.0 x 87.5
	NSBIV-N069/01	1"	29	32	16.8	91.0 x 98.0
	NSBIV-N076/01	1¼"	36	40	17.3	104.5 x 125.5
	NSBIV-N088/01	1½"	48	50	17.3	119.5 x 138.5
	NSBIV-N098/01	2"	48	50	17.8	119.0 x 138.5

#### Approvals



Technical requirements mainly in heavy machine building and rail applications  
 Suitable for occasional rotation  
 Specially formulated polyamide 6  
 Thread and integrated swivel adapter made from colourless anodized aluminium  
 Very high impact resistance  
 High thread and system connection strength  
 Suitable for occasional rotation  
 Easy introduction of wires and cables  
 Vibration-proof connection to PMAFLEX conduits  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits both conduit profiles – fine (T) and coarse (G)  
 IP68, IP69

<sup>4</sup> IP68GT available. Please add "GT" prior to the thread length (for example NSBV-M329GT-13)

## Flanges, connectors with female, metric thread

### Type VO & VI

#### Type VO - Flange 90°

	Order no. IP66 ①	Order no. IP68 ① ②	Fits to conduit size		Width x Length x Depth (mm)	Screw sizes
			NW	Metric		
	BVOD-P167GT	BVOV-P167	17	20	46.0 x 66.0 x 35.5	2 x M5
	BVOD-P213GT	BVOV-P213	23	25	65.5 x 70.0 x 43.0	2 x M6
	BVOD-P299GT	BVOV-P299	29	32	67.0 x 78.0 x 49.5	4 x M6
	BVOD-P366GT	BVOV-P366	36	40	85.0 x 102.0 x 65.5	4 x M6
	BVOD-P488GT	BVOV-P488	48	50	86.0 x 119.0 x 77.5	4 x M6

For cable protection systems in a wide range of applications  
 Flange seal FGO4 made from EPDM, flange seal FGO4/01 made from NBR  
 Temperature range with FGO4: -40°C to +105°C  
 Temperature range with FGO4/01: -25°C to +70°C

#### Type VI - Connector straight, female metric thread

	Order no. IP66, black	Order no. IP68, black ②	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVID-M12MGT	-	M12 x 1.5	07	10	8.0	32.0
	BVID-M160GT	BVIR-M160	M16 x 1.5	10	12	8.0	33.5
	BVID-M162GT	BVIR-M162	M16 x 1.5	12	16	8.0	36.5
	-	BVIR-M202	M20 x 1.5	12	16	8.0	36.5
	BVID-M207GT	BVIR-M207	M20 x 1.5	17	20	8.0	44.5
	BVID-M253GT	BVIR-M253	M25 x 1.5	23	25	8.0	48.5
	-	BVIR-M257	M25 x 1.5	17	20	8.0	44.5
	BVID-M329GT	BVIR-M329	M32 x 1.5	29	32	10.0	51.5
	BVID-M406GT	BVIR-M406	M40 x 1.5	36	40	10.0	65.5
	BVID-M508GT	BVIR-M508	M50 x 1.5	48	50	10.0	65.5
	BVID-M638GT	BVIR-M638	M63 x 1.5	48	50	10.0	65.5

#### Approvals



For cable protection systems in a wide range of applications  
 VID: IP66 static/IP54 dynamic, conduit side  
 VIR: IP68 static/IP67 dynamic, conduit side  
 No seal on female thread side

① Please replace "B" for black with "S" for grey in front of the order no.  
 ② IP68GT available. Please add "GT" after the order no.

## Connectors with female, metric metal thread

### Type VIR

#### Type VIR - Connector straight, female metric metal thread

	Order no. IP68, black <sup>②</sup>	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVIR-M120	M12 x 1.5	10	12	7.5	35.0
	NVIR-M160	M16 x 1.5	10	12	9.0	40.5
	NVIR-M162	M16 x 1.5	12	16	9.0	42.0
	NVIR-M207	M20 x 1.5	17	20	10.0	50.0
	NVIR-M253	M25 x 1.5	23	25	10.0	56.0
	NVIR-M329	M32 x 1.5	29	32	11.0	55.5
	NVIR-M406	M40 x 1.5	36	40	13.0	71.0
	NVIR-M508	M50 x 1.5	48	50	15.0	75.0
	NVIR-M638	M63 x 1.5	48	50	17.5	76.0

#### Approvals



For applications in railway vehicles and heavy machine construction  
 High thread and system connection strengths  
 VIR: IP68 static/IP67 dynamic, conduit side  
 No seal on female thread side

<sup>①</sup> Please replace "B" for black with "S" for grey in front of the order no.

<sup>②</sup> IP68GT available. Please add "GT" after the order no.

## Connector straight, PG female thread

### Type FIL/VIR & VIZR

#### Type FIL/VIR - Connector straight, female PG thread

	Order no. IP67, black	Order no. IP68, black <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BFIL-P07M	-	07	07	10	8.0	29.0
	BFIL-P070	-	07	10	12	8.0	34.5
	-	BVIR-P070	07	10	12	8.0	33.5
	BFIL-P090	-	09	10	12	8.0	32.5
	-	BVIR-P090	09	10	12	8.0	33.5
	BFIL-P112	-	11	12	16	8.0	32.5
	-	BVIR-P112	11	12	16	8.0	36.5
	BFIL-P117	-	11	17	20	8.0	35.0
	BFIL-P132	-	13.5	12	16	8.0	32.5
	BFIL-P137	-	13.5	17	20	8.0	33.5
	BFIL-P160	-	16	10	12	7.0	37.0
	BFIL-P167	-	16	17	20	8.0	33.5
	-	BVIR-P167	16	17	20	8.0	44.5
	BFIL-P217	-	21	17	20	10.5	35.5
	BFIL-P213	-	21	23	25	8.0	39.0
	BFIL-P293	-	29	23	25	9.0	42.0
	BFIL-P299	-	29	29	32	9.0	43.0
	BFIL-P369	-	36	29	32	16.0	52.0
	BFIL-P366	-	36	36	25	13.0	64.0
	BFIL-P488	-	48	48	50	13.0	65.0

For cable protection systems in a wide range of applications

VIR: IP68 static/IP67 dynamic, conduit side

FIL: IP67 static/IP65 dynamic, conduit side

No seal on female thread side

#### Type VIZR - Connector straight, female PG metal thread

	Order no. IP68, black <sup>②</sup>	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	NVIZR-P07M	07	07	10	6.0	35.0
	NVIZR-P090	09	10	12	9.0	38.5
	NVIZR-P110	11	10	12	9.0	41.0
	NVIZR-P112	11	12	16	9.0	42.0
	NVIZR-P137	13.5	17	20	8.0	46.5
	NVIZR-P167	16	17	20	9.5	48.0
	NVIZR-P213	21	23	25	10.0	58.0
	NVIZR-P299	29	29	32	12.5	57.0
	NVIZR-P366	36	36	40	13.0	76.0
	NVIZR-P488	48	48	50	14.0	75.0

For applications in railway vehicles and heavy machine construction

High thread and system connection strengths

VIZR: IP68 static/IP67 dynamic, conduit side

No seal on female thread side

<sup>②</sup> IP68GT available. Please add  
"GT" after the order no.

## Connectors with female UNEF thread

### Type VI

#### Type VI - Connector straight, UNEF female thread for AMP connectors

	Order no. IP66, black	Order no. IP68, black ②	Thread UNEF	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	BVIDA-U15MGT	BVIRA-U15M	5/8"-24	07	10	8.0	31.5
	BVIDA-U150GT	BVIRA-U150	5/8"-24	10	12	8.0	33.5
	BVIDA-U152GT	BVIRA-U152	5/8"-24	12	16	8.0	36.5
	BVIDA-U180GT	BVIRA-U180	3/4"-20	10	12	8.0	33.5
	BVIDA-U182GT	BVIRA-U182	3/4"-20	12	16	8.0	36.5
	BVIDA-U187GT	BVIRA-U187	3/4"-20	17	20	8.0	44.5
	BVIDA-U232GT	BVIRA-U232	1 5/16"-20	12	16	8.0	38.5
	BVIDA-U237GT	BVIRA-U237	1 5/16"-20	17	20	8.0	46.5
	BVIDA-U233GT	BVIRA-U233	1 5/16"-20	23	25	8.0	48.5
	BVIDA-U347GT	BVIRA-U347	1 3/8"-18	17	20	8.0	46.5
	BVIDA-U343GT	BVIRA-U343	1 3/8"-18	23	25	8.0	48.5
	BVIDA-U402GT	BVIRA-U402	1 5/8"-18	12	16	7.0	55.5
	BVIDA-U407GT	BVIRA-U407	1 5/8"-18	17	20	7.0	61.5
	BVIDA-U403GT	BVIRA-U403	1 5/8"-18	23	25	7.0	60.5

For cable protection systems in a wide range of applications

Suitable for the AMP connector serie CPC

VIDA: IP66 static/IP54 dynamic, conduit side. VIRA: IP68 static/IP67 dynamic, conduit side

No seal on female thread side

#### Type VI - Connector straight, UNEF female thread for Souriau connectors

	Order no. IP66, black	Order no. IP68, black ②	Thread UNEF	Fits to NW	Shell size UTG-6	Thread length (mm)	Overall length (mm)
BVIDB-U202GT	BVIRB-U202	1 3/16"-20	12	14-12	4.5	44.0	
BVIDB-U232GT	BVIRB-U232	1 5/16"-20	12	16-19	4.5	49.0	
BVIDB-U237GT	BVIRB-U237	1 5/16"-20	17	16-19	4.5	52.0	
BVIDB-U267GT	BVIRB-U267	1 1/16"-18	17	18-23	4.5	52.0	
BVIDB-U297GT	BVIRB-U297	1 3/16"-18	17	20-28	6.5	55.5	
BVIDB-U293GT	BVIRB-U293	1 3/16"-18	23	20-28	6.5	52.0	
BVIDB-U323GT	BVIRB-U323	1 5/16"-18	23	22-35	6.5	52.0	
BVIDB-U357GT	BVIRB-U357	1 7/16"-18	17	24-48	6.5	58.5	
BVIDB-U353GT	BVIRB-U353	1 7/16"-18	23	24-48	6.5	54.0	
BVIDB-U359GT	BVIRB-U359	1 7/16"-18	29	24-48	6.5	50.5	

For cable protection systems in a wide range of applications

Suitable for the Souriau connector series UTG-6/ITT Cannon Trident

VIDB: IP66 static/IP54 dynamic, conduit side. VIRB: IP68 static/IP67 dynamic, conduit side

No seal on female thread side

	Order no. IP68, black ②	Thread UNEF	Fits to NW	Shell size UTG-6	Thread length (mm)	Overall length (mm)
	BVIRS-U162	1 1/16"-24	12	12	9.4	47.5
	BVIRS-U202	1 3/16"-20	12	14	9.4	47.5
	BVIRS-U237	1 5/16"-20	17	16	10.0	56.0
	BVIRS-U267	1 1/16"-18	17	18	9.2	55.5
	BVIRS-U293	1 3/16"-18	23	20	9.8	56.0
	BVIRS-U323	1 5/16"-18	23	22	9.8	56.0
	BVIRS-U359	1 7/16"-18	29	24	9.7	55.5

For cable protection systems in a wide range of applications

Suitable for the Souriau connector series UTO and UTS

VIRS: IP68 static/IP67 dynamic, conduit side. No seal on female thread side

② IP68GT available. Please add "GT" after the order no.

## Connectors with female UN thread

### Type VI

#### Type VI - Connector straight, UN female thread for MIL-C5015

	Order no. IP66, black	Order no. IP68, black ②	Thread UN	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	-	BVIVG-U152*	5/8" -24 UNEF	12	16	8.0	36.5
	-	BVIVG-U187*	3/4" -20 UNEF	17	20	9.0	46.5
	-	BVIVG-U210*	7/8" -20 UNEF	10	07	9.0	37.0
	BVIDG-U212GT	BVIVG-U212*	7/8" -20 UNEF	12	16	9.0	38.5
	BVIDG-U217GT	BVIVG-U217*	7/8" -20 UNEF	17	20	9.0	46.5
	BVIDG-U242GT	BVIVG-U242*	1" -20 UNEF	12	16	9.0	40.5
	-	BVIVG-U243*	1" -20 UNEF	23	25	9.0	55.0
	BVIDG-U247GT	BVIVG-U247*	1" -20 UNEF	17	20	9.0	47.5
	-	BVIVG-U292*	1 3/16" -18 UNEF	12	16	9.0	40.5
	BVIDG-U293GT	BVIVG-U293*	1 3/16" -18 UNEF	23	25	9.0	55.0
	BVIDG-U297GT	BVIVG-U297*	1 3/16" -18 UNEF	17	20	9.0	47.5
	-	BVIVG-U299*	1 3/16" -18 UNEF	29	32	9.0	47.0
	-	BVIVG-U349*	1 3/8" -18 UNEF	29	32	9.0	52.0
	-	BVIVG-U352*	1 7/16" -18 UNEF	12	16	9.0	39.0
	BVIDG-U353GT	BVIVG-U353*	1 7/16" -18 UNEF	23	25	9.0	52.0
	-	BVIVG-U356*	1 7/16" -18 UNEF	36	40	9.0	63.0
	BVIDG-U357GT	BVIVG-U357*	1 7/16" -18 UNEF	17	20	9.0	46.5
	BVIDG-U359GT	BVIVG-U359*	1 7/16" -18 UNEF	29	29	9.0	52.0
	BVIDG-U433GT	BVIVG-U433*	1 3/4" -18 UNS	23	25	10.0	52.0
	BVIDG-U436GT	BVIVG-U436*	1 3/4" -18 UNS	36	40	10.0	62.5
	-	BVIVG-U437*	1 3/4" -18 UNS	17	20	10.0	46.5
	BVIDG-U439GT	BVIVG-U439*	1 3/4" -18 UNS	29	32	10.0	51.5
	-	BVIVG-U503*	2" -18 UNS	23	25	10.0	51.5
	BVIDG-U506GT	BVIVG-U506*	2" -18 UNS	36	40	10.0	62.5
	-	BVIVG-U508*	2" -18 UNS	48	50	10.0	64.5
	BVIDG-U509GT	BVIVG-U509*	2" -18 UNS	29	32	10.0	55.0
	-	BVIVG-U563*	2 1/4" -16 UN	23	25	10.0	51.0
	BVIDG-U566GT	BVIVG-U566*	2 1/4" -16 UN	36	40	10.0	62.0
-	BVIVG-U568*	2 1/4" -16 UN	48	50	10.0	64.0	
BVIDG-U569GT	BVIVG-U569*	2 1/4" -16 UN	29	32	10.0	51.0	
-	BVIVG-U628*	2 1/2" -16 UN	48	50	10.0	64.0	

#### Approvals



For applications in machine, vehicle and traction building industries

Suitable for MIL connector series C5015

VIDG: IP66 static/IP54 dynamic, conduit- and thread side

VIVG: IP68 static/IP67 dynamic, conduit- and thread side

No seal on female thread side

\* UL Recognition according to UL 1619

② IP68GT available. Please add  
"GT" after the order no.

## Y, T pieces, conduit adapters

### Type VY & VT

#### Type VY - Y piece

	Order no. IP66 ①	Order no. IP68 ① ②	1 x conduit size		2 x conduit size	
			NW	Metric	NW	Metric
	BVYD-100707GT	BVYR-100707	10	12	07	10
	BVYD-121010GT	BVYR-121010	12	16	10	12
	BVYD-171212GT	BVYR-171212	17	20	12	16
	BVYD-231717GT	BVYR-231717	23	25	17	20
	BVYD-292323GT	BVYR-292323	29	32	23	25
	BVYD-362929GT	BVYR-362929	36	40	29	32
	BVYD-483636GT	BVYR-483636	48	50	36	40

#### Approvals



Sizes can be adapted with AV conduit adapters to fit smaller conduit dimensions

#### Type VT - T piece

	Order no. IP66 ①	Order no. IP68 ① ②	3 x conduit size	
			NW	Metric
	BVTD-101010GT	BVTR-101010	10	12
	BVTD-121212GT	BVTR-121212	12	16
	BVTD-171717GT	BVTR-171717	17	20
	BVTD-232323GT	BVTR-232323	23	25
	BVTD-292929GT	BVTR-292929	29	32
	BVTD-363636GT	BVTR-363636	36	40
	BVTD-484848GT	BVTR-484848	48	50

#### Approvals



Sizes can be adapted with AV conduit adapters to fit smaller conduit dimensions

① Please replace "B" for black with "S" for grey in front of the order no.  
 ② IP68GT available. Please add "GT" after the order no.

## Y, T pieces, conduit adapters

### Type AV

#### Type AV - Conduit adapter

	Order no. IP66, black	Order no. IP68, black	Fits to fitting for		Fits to fitting size		Overall length (mm)
			NW	Metric	NW	Metric	
AV	–	BAVR-10/07	10	12	07	10	43.0
	BAVD-12/10GT	BAVR-12/10	12	16	10	12	46.0
	BAVD-17/10GT	BAVR-17/10	17	20	10	12	53.0
	BAVD-17/12GT	BAVR-17/12	17	20	12	16	54.0
	BAVD-23/10GT	BAVR-23/10	23	25	10	12	54.0
	BAVD-23/12GT	BAVR-23/12	23	25	12	16	53.0
	BAVD-23/17GT	BAVR-23/17	23	25	17	20	62.0
	BAVD-29/10GT	BAVR-29/10	29	32	10	12	56.5
	BAVD-29/12GT	BAVR-29/12	29	32	12	16	55.0
	BAVD-29/17GT	BAVR-29/17	29	32	17	20	61.0
	BAVD-29/23GT	BAVR-29/23	29	32	23	25	64.0
	BAVD-36/29GT	BAVR-36/29	36	40	29	32	81.0
	BAVD-48/36GT	BAVR-48/36	48	50	36	40	88.5

#### Approvals



Allows conduit size reduction of PMA connectors, particularly of T and Y pieces

## Connections, connection splices, metric, PG

### Type VNR-REM & VSG

#### Type VNR-REM - Connection to solid metal tube, metric/PG

	Order no. IP66 without clamp ① ②	Order no. IP68 with clamp ① ②	Fits to conduit size		Steel tube metric	Inside Ø (mm)	Overall length (mm)
			NW	Metric			
	BVNR-REM162	BVNR-REM162-24	12	16	M16	16.0	54.0
	BVNR-REM187	BVNR-REM187-28	17	20	M18	18.5	65.0
	BVNR-REM207	BVNR-REM207-28	17	20	M20	20.0	65.0
	BVNR-REM253	BVNR-REM253-32	23	25	M25	26.0	71.0
	BVNR-REM329	BVNR-REM329-44	29	32	M32	32.0	71.0
	BVNR-REM406	BVNR-REM406-50	36	40	M40	40.0	90.0
	BVNR-REM508	BVNR-REM508-65	48	50	M50	50.0	90.0

	Order no. IP66 without clamp ① ②	Order no. IP68 with clamp ① ②	Fits to conduit size		Steel tube PG	Inside Ø (mm)	Overall length (mm)
			NW	Metric			
	BVNR-RE12	BVNR-RE12-24	12	16	PG11	18.5	56.0
	BVNR-RE1317	BVNR-RE1317-28	17	20	PG13	20.4	65.0
	BVNR-RE17	BVNR-RE17-28	17	20	PG16	22.5	65.0
	BVNR-RE23	BVNR-RE23-32	23	25	PG21	28.5	71.0
	BVNR-RE29	BVNR-RE29-44	29	32	PG29	37.0	71.0
	BVNR-RE36	BVNR-RE36-50	36	40	PG36	47.0	84.0
	BVNR-RE48	BVNR-RE48-65	48	50	PG48	59.3	90.0

Quick connection of solid metal tubes with flexible PMA conduits

Jubilee clip made of galvanised bright steel

Available with or without jubilee clip

IP68 on corrugated conduit side, on tube side up to IP68 with sealant

#### Type VSG - Connection splice for flexible conduits

	Order no. IP66 ①	Order no. IP68 ①	Fits to conduit size		Inside Ø (mm)	Overall length (mm)
			NW	Metric		
	BVSGD-1212GT	BVSGR-1212	12	16	23.5	66.0
	BVSGD-1717GT	BVSGR-1717	17	20	29.5	87.0
	BVSGD-2323GT	BVSGR-2323	23	25	37.0	103.0
	BVSGD-2929GT	BVSGR-2929	29	32	44.0	100.0
	BVSGD-3636GT	BVSGR-3636	36	40	53.5	130.0
	BVSGD-4848GT	BVSGR-4848	48	50	66.0	133.0

#### Approvals



Designed for optimal connection of PMA conduits

① Please replace "B" for black with "S" for grey in front of the order no.

② IP68GT available. Please add "GT" to order no. or insert before clamp size (e.g. BVNR-REM162GT, BVNR-REM162GT-24)

## PMA FIXPlus fittings with metric threads

### Type UNV-M-UL & UAV-M-UL

#### Type UNV-M-UL - Connector straight, metric thread

	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	BUNV-M207-UL	SUNV-M207-UL	M20 x 1.5	17	11.0	29.5	47.5
	BUNV-M257-UL	SUNV-M257-UL	M25 x 1.5	17	12.0	32.0	48.5
	BUNV-M253-UL	SUNV-M253-UL	M25 x 1.5	23	12.0	37.0	52.0
	BUNV-M323-UL	SUNV-M323-UL	M32 x 1.5	23	15.0	43.0	55.5
	BUNV-M329-UL	SUNV-M329-UL	M32 x 1.5	29	15.0	44.0	56.0
	BUNV-M409-UL	SUNV-M409-UL	M40 x 1.5	29	19.0	49.0	60.0
	BUNV-M406-UL	SUNV-M406-UL	M40 x 1.5	36	19.0	55.0	72.5
	BUNV-M506-UL	SUNV-M506-UL	M50 x 1.5	36	19.0	59.0	72.0
	BUNV-M508-UL	SUNV-M508-UL	M50 x 1.5	48	19.0	69.0	72.5
	BUNV-M638-UL	SUNV-M638-UL	M63 x 1.5	48	19.0	75.0	72.0

#### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPlus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nut delivered with the fitting

#### Type UAV-M-UL - Connector 45° elbow, metric thread

	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
	BUAV-M207-UL	SUAV-M207-UL	M20 x 1.5	17	11.0	29.5	55.5	51.5
	BUAV-M253-UL	SUAV-M253-UL	M25 x 1.5	23	12.0	37.0	65.0	58.5
	BUAV-M329-UL	SUAV-M329-UL	M32 x 1.5	29	15.0	44.0	73.5	66.5
	BUAV-M406-UL	SUAV-M406-UL	M40 x 1.5	36	19.0	53.5	92.5	85.5
	BUAV-M506-UL	SUAV-M506-UL	M50 x 1.5	36	19.0	53.5	92.5	89.5
	BUAV-M508-UL	SUAV-M508-UL	M50 x 1.5	48	19.0	66.0	100.0	96.0
	BUAV-M638-UL	SUAV-M638-UL	M63 x 1.5	48	19.0	66.0	100.0	104.0

#### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPlus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nut delivered with the fitting

## PMA FIXPLus fittings with metric threads

Type UWV-M-UL

Type UWV-M-UL - Connector 90° elbow, metric thread

	Order no. black	Order no. grey	Thread metric	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
UNV-M-UL	BUWV-M207-UL	SUWV-M207-UL	M20 x 1.5	17	11.0	29.5	58.5	43.5
	BUWV-M253-UL	SUWV-M253-UL	M25 x 1.5	23	12.0	37.0	65.0	54.0
	BUWV-M329-UL	SUWV-M329-UL	M32 x 1.5	29	15.0	44.0	73.0	64.5
	BUWV-M406-UL	SUWV-M406-UL	M40 x 1.5	36	19.0	53.5	69.0	78.0
	BUWV-M508-UL	SUWV-M508-UL	M50 x 1.5	48	19.0	66.0	106.0	91.5

### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPLus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nut delivered with the fitting

## PMA FIXPlus fittings with NPT threads

### Type UNV-N-UL & UAV-N-UL

#### Type UNV-N-UL - Connector straight, NPT thread

	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	BUNV-N027-UL	SUNV-N027-UL	½"	17	13.0	29.5	49.5
	BUNV-N043-UL	SUNV-N043-UL	¾"	23	14.0	37.0	54.0
	BUNV-N069-UL	SUNV-N069-UL	1"	29	15.0	44.0	56.0
	BUNV-N076-UL	SUNV-N076-UL	1¼"	36	18.0	55.0	71.0
	BUNV-N088-UL	SUNV-N088-UL	1½"	48	18.0	69.0	71.5
	BUNV-N098-UL	SUNV-N098-UL	2"	48	18.0	69.0	71.5

#### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPlus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nuts available on request

#### Type UAV-N-UL - Connector 45° elbow, metric thread

	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
	BUAV-N027-UL	SUAV-N027-UL	½"	17	13.0	29.5	57.5	51.5
	BUAV-N043-UL	SUAV-N043-UL	¾"	23	14.0	37.0	67.0	60.0
	BUAV-N069-UL	SUAV-N069-UL	1"	29	15.0	44.0	73.5	67.0
	BUAV-N076-UL	SUAV-N076-UL	1¼"	36	18.0	53.5	91.5	85.5
	BUAV-N088-UL	SUAV-N088-UL	1½"	36	18.0	66.0	99.0	96.0
	BUAV-N098-UL	SUAV-N097-UL	2"	48	18.0	66.0	99.0	101.0

#### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPlus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nuts available on request

## PMA FIXPLus fittings with NPT threads

### Type UWV-M-UL

#### Type UWV-M-UL - Connector 90° elbow, NPT thread

	Order no. black	Order no. grey	Thread size NPT	Fits to conduit size NW	Thread length (mm)	Outside Ø (mm)	Overall length (mm)	Overall height (mm)
UNV-N-UL	BUWV-N027-UL	SUWV-N027-UL	½"	17	13.0	29.5	58.5	45.5
	BUWV-N043-UL	SUWV-N043-UL	¾"	23	14.0	37.0	66.5	56.0
	BUWV-N069-UL	SUWV-N069-UL	1"	29	15.0	44.0	73.5	64.5
	BUWV-N076-UL	SUWV-N076-UL	1¼"	36	18.0	53.5	96.0	77.0
	BUWV-N088-UL	SUWV-N088-UL	1½"	48	18.0	66.0	106.0	90.5
	BUWV-N098-UL	SUWV-N098-UL	2"	48	18.0	66.0	111.0	90.5

#### Approvals



Extremely high impact resistance  
 Vibration-resistant connection to PMA FLEXPLus conduits  
 Easy installation  
 High conduit pull-out strength  
 Very good chemical properties  
 Free from halogens and cadmium  
 Fits conduit profile coarse (G)  
 Lock nuts available on request




---

# Special connectors

## Introduction

Meet the demands of our customers. We are always looking for ways to offer our best services.

In addition to the broad ranges of connectors offered within the PMAFIX Pro, PMAFIX and Smartline product lines, PMA offers further application specific connector solutions such as the MPNK-M series for high temperatures applications, JENQ-M series for Food and Beverage applications and the MONK-M to terminate an overbraided conduit.

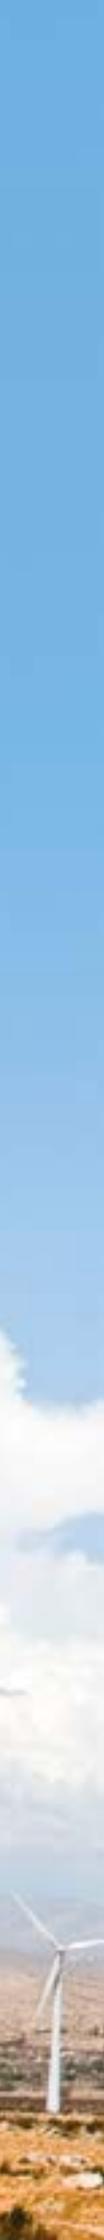



## Metal connectors, metric

### Type MPNK & MONK

#### Type MPNK - Metal connector for PMA conduits, metric thread

	Order no. metal	Thread metric	Fits to conduit size NW	Fits to conduit size profile	Inside Ø min. (mm)	Thread length (mm)
	MPNK-M160	M16 x 1.5	10	T	12.0	12.0
	MPNK-M162	M16 x 1.5	12	T	12.0	12.0
	MPNK-M207	M20 x 1.5	17	T	15.8	14.0
	MPNK-M253	M25 x 1.5	23	G	19.0	15.0
	MPNK-M329	M32 x 1.5	29	G	26.5	18.0

For high temperature applications  
 Suitable for high mechanical loads  
 Nickel-plated brass  
 Seals made from silicon  
 Easy introduction of wires and cables  
 Vibration-proof connection to PMAFLEX conduits  
 Very good chemical properties  
 IP68

#### Type MONK - Metal connector for overbraided conduits, metric thread

	Order no. metal	Thread metric	Fits to conduit size NW	Fits to conduit profile	Inside Ø min. (mm)	Thread length (mm)
	MONK-M162	M16 x 1.5	12	T	12.0	12.0
	MONK-M207	M20 x 1.5	17	T	16.0	14.0
	MONK-M253	M25 x 1.5	23	G	19.0	15.0
	MONK-M329	M32 x 1.5	29	G	26.5	18.0
	MONK-M406	M40 x 1.5	36	G	35.0	15.0
	MONK-M508	M50 x 1.5	48	G	45.0	16.0

For termination of overbraided conduits  
 For high temperature applications and applications in areas with hot metal shavings and flying sparks  
 Nickel-plated brass  
 Seals made from silicon

## Stainless steel liquid tight fitting

### Type JENQ

Type JENQ - for overextruded conduit, IP69

	Order no.	Thread size metric	Fits to conduit size NW	Thread length (mm)	Inside Ø min. (mm)	Ø D (mm)	Wrench size (mm)	sw
JENQ	JENQ-M162-10	M16 x 1.5	12	10.0	9.2	31.9	35.9	30.0
	JENQ-M207-10	M20 x 1.5	17	10.0	13.0	35.0	36.9	32.0
	JENQ-M253-11	M25 x 1.5	23	11.0	18.3	44.5	41.6	40.0
	JENQ-M329-13	M32 x 1.5	29	13.0	24.0	55.5	48.7	50.0
	JENQ-M406-13	M40 x 1.5	36	13.0	32.4	61.5	51.2	57.0
	JENQ-M506-14	M50 x 1.5	48	14.0	42.3	78.0	57.4	74.0



#### Approvals



IP 69 rating  
 For termination of overextruded conduits  
 For high hygienic requirements  
 Suitable for food & beverage industry  
 Unique single piece design Stainless Steel 316L material  
 Seals made from FDA compliant material  
 Easy cleaning  
 High thread and system connection strengths  
 High resistance to chemicals and cleaning agents  
 Easy assembly

# Accessories

## Introduction

For flexible and application friendly solutions. PMA offers a vast array of practical accessories in order to complete the PMA cable protection system.

We offer lock nuts produced from polyamide or metal, thread reducers and enlargers, conduit adapters, swivel adapters as well as different mounting clips for conduits. All this practical products will help to create the PMA line for our customers even more flexible and application friendly.





## Flat gaskets, metric, PG, NPT, GAS

### Type SVN4

#### Type SVN4 - Flat thread gasket, metric/NPT/PG/GAS

Order no.	Fits to thread metric	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4				
SVN4-M12	M12 x 1.5	12.0	20.0	1.5
SVN4-M12/02	M12 x 1.5	12.0	23.0	1.5
SVN4-M16	M16 x 1.5	16.0	22.0	1.5
SVN4-M16/02	M16 x 1.5	16.0	25.0	1.5
SVN4-M20	M20 x 1.5	20.0	27.0	1.5
SVN4-M20/02	M20 x 1.5	20.0	33.0	1.5
SVN4-M25	M25 x 1.5	25.0	35.0	1.5
SVN4-M25/01	M25 x 1.5	25.0	31.0	1.5
SVN4-M25/02	M25 x 1.5	25.0	39.0	1.5
SVN4-M32	M32 x 1.5	32.0	43.0	1.5
SVN4-M32/02	M32 x 1.5	32.0	49.0	1.5
SVN4-M40	M40 x 1.5	40.0	55.0	1.5
SVN4-M40/01	M40 x 1.5	40.0	51.0	1.5
SVN4-M40/02	M40 x 1.5	40.0	64.0	1.5
SVN4-M50	M50 x 1.5	50.0	69.0	1.5
SVN4-M50/01	M50 x 1.5	50.0	59.0	1.5
SVN4-M50/02	M50 x 1.5	50.0	74.0	1.5
SVN4-M63	M63 x 1.5	63.0	75.0	1.5



Order no.	Fits to thread PG	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-07	07	12.5	16.5	1.5
SVN4-09	07	15.2	20.0	1.5
SVN4-11	11	18.6	24.0	1.5
SVN4-13	13.5	20.4	31.0	1.5
SVN4-16	16	22.5	31.0	1.5
SVN4-21	21	28.3	37.0	1.5
SVN4-29	29	37.0	48.0	1.5
SVN4-36	36	47.0	57.0	1.5
SVN4-42	42	54.0	60.0	1.5
SVN4-48	48	59.3	69.0	1.5

Order no.	Fits to thread PG	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-N02/01	½"	28.0	21.6	1.5
SVN4-N04/01	¾"	36.0	27.0	1.5
SVN4-N06/01	1"	46.0	33.7	1.5
SVN4-N07/01	1¼"	55.0	42.5	1.5
SVN4-N08/01	1½"	70.0	48.6	1.5
SVN4-N09/01	2"	70.0	60.7	1.5

Order no.	Fits to thread GAS	Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
SVN4-G00	¼"	13.2	20.0	1.5
SVN4-G01	⅜"	16.7	22.0	1.5
SVN4-G02	½"	21.0	28.0	1.5
SVN4-G04	¾"	26.5	34.0	1.5
SVN4-G06	1"	33.3	42.0	1.5
SVN4-G07	1¼"	41.9	53.0	1.5
SVN4-G08	1½"	47.8	62.0	1.5
SVN4-G09	2"	59.6	69.0	1.5

For sealing of polyamide or metal threads of PMA fittings. For ingress protection at the thread up to IP68

For solid sealing of uneven rough contact areas around the thread hole or when no constructive measures for O-Rings are provided

NBR reinforced with aramide fibres (asbestos-free). Temperature range: -50°C to +200°C, short-term to +350°C

**Note:** Depending on flange sizes flat thread gaskets can have different widths. Please indicate fitting for which gasket is needed for replacement orders

## Locking clips, water impact protection

### Type AFN2, OVN2 & WPS

#### Type AFN2 - Universal safety clip

	Order no. dark grey	Fits to conduit size		Width (mm)	Length (mm)	Thickness (mm)
		NW	Profile			
	AFN2-07GT	07	G + T	14.0	14.0	7.0
	AFN2-10GT	10	G + T	17.5	17.0	8.0
	AFN2-12GT	12	G + T	20.5	20.0	7.3
	AFN2-17GT	17	G + T	26.5	22.0	8.0
	AFN2-23GT	23	G + T	34.0	27.5	11.8
	AFN2-29GT	29	G + T	40.5	32.0	11.8
	AFN2-36GT	36	G + T	50.0	39.0	9.5
	AFN2-48GT	48	G + T	62.0	47.0	9.5

Pre-installed in PMA connectors IP66 and IP68GT  
Allows simple push-in assembly of PMA conduits

#### Type OVN2 - Oval clip

	Order no. dark grey	Fits to conduit size		Width (mm)	Length (mm)	Thickness (mm)
		NW	Profile			
	OVN2-07	07	G + T	14.0	14.0	6.0
	OVN2-10	10	G + T	17.5	17.0	7.0
	OVN2-12	12	G + T	21.0	19.0	6.0
	OVN2-17	17	G + T	26.5	22.5	7.0
	OVN2-23	23	G + T	34.0	27.5	10.5
	OVN2-29	29	G + T	40.5	32.0	10.5
	OVN2-36	36	G + T	49.5	39.0	8.5
	OVN2-48	48	G + T	62.0	47.0	8.5

Provides reliable fixation of PMA conduits within PMA IP68 fittings

#### Type WPS - Water impact protection

	Order no. black	Fits to conduit size		Outside Ø (mm)	Thickness (mm)
		NW	Profile		
	WPS-NW10	10	G + T	22.0	8.0
	WPS-NW12	12	G + T	26.0	8.0
	WPS-NW17	17	G + T	33.0	8.0
	WPS-NW23	23	G + T	40.0	9.0
	WPS-NW29	29	G + T	47.0	9.5
	WPS-NW36	36	G + T	59.0	10.0
	WPS-NW48	48	G + T	71.0	10.0

Increased protection of PMAFIX fittings against water jet impact – increased protection up to IP69

For increased ingress protection requirements regarding high pressure/steam jet cleaning

Based on PMAFIX IP68 system

Two-piece water impact protection with click cap

Retrofit installation possible

## Sealing caps

### Type NVN3, NFN3 & NR

#### Type NVN3 - Sealing cap, reinforced

	Order no.	Fits to conduit size		Length (mm)
		NW	Metric	
	NVN3-07	07	10	9.0
	NVN3-09	10	12	9.0
	NVN3-11	12	16	12.0
	NVN3-16	17	23	16.5
	NVN3-21	23	25	13.0
	NVN3-29	29	32	14.0
	NVN3-36	36	40	17.5
	NVN3-48	48	50	17.5

In connection with PMAFIX connectors ("V" series) and PMA corrugated conduits

For ingress protection IP68 static/IP67 dynamic

Specially modified polyesterelastomer

Free from halogens and cadmium

Fits both conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

#### Type NFN3 - Sealing cap

	Order no.	Fits to conduit size		Length (mm)
		NW	Profile	
	NFN3-07	07	10	9.0
	NFN3-09	10	12	9.0
	NFN3-11	12	16	9.0
	NFN3-16	17	23	9.0
	NFN3-21	23	25	9.0
	NFN3-29	29	32	9.0
	NFN3-36	36	40	11.0
	NFN3-48	48	50	11.0

In connection with PMAFIX connectors ("F" series) and PMA corrugated conduits

For ingress protection IP67 static/IP65 dynamic

Specially modified polyesterelastomer

Free from halogens and cadmium

Fits conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

#### Type KNH2 - PMAFIX Pro sealing and locking element

	Order no.	Fits to conduit size		Outside Ø (mm)	Overall length (mm)
		NW	Metric		
	KNH2-NW10	10	12	22.0	28.0
	KNH2-NW12	12	16	25.5	33.5
	KNH2-NW17	17	20	31.5	38.5
	KNH2-NW23	23	25	38.5	41.0
	KNH2-NW29	29	32	46.5	46.5
	KNH2-NW36	36	40	55.5	50.5
	KNH2-NW48	48	50	68.0	56.5

For use in connection with PMAFIX PRO connectors PMA corrugated conduits for ingress protection IP68 and IP69 static and dynamic

Specially modified PA6/Polyester-elastomer

Free from halogens and cadmium

Fits conduit profiles: fine (T) and coarse (G)

Temperature range: -40°C to +105°C

## Enlargers, reducers, metric and PG

### Type ME, MR & NR

#### Type ME - Enlarger, brass, metric thread

	Order no.	Thread outside		Thread inside		Wrench size (mm)	Inside Ø (mm)	Overall length (mm)
		Metric	Length (mm)	Metric	Length (mm)			
	M12M16M	M12 x 1.5	5.0	M16 x 1.5	7.0	18	8.0	16.0
	M16M20M	M16 x 1.5	5.0	M20 x 1.5	7.5	22	12.0	16.5
	M20M25M	M20 x 1.5	6.0	M25 x 1.5	8.0	27	15.0	18.5
	M25M32M	M25 x 1.5	7.0	M32 x 1.5	9.0	34	21.0	20.5
	M32M40M	M32 x 1.5	8.0	M40 x 1.5	10	42	26.0	23.5
	M40M50M	M40 x 1.5	8.0	M50 x 1.5	13	52	34.0	30.0
	M50M63M	M50 x 1.5	9.0	M63 x 1.5	16	65	44.0	32.5

For enlargement of an existing thread  
 Nickel-plated brass  
 Hexagonal form  
 Temperature range: -60°C to +200°C

#### Type MR - Reducer, brass, metric thread

	Order no. standard	Order no. hexagonal	Thread outside metric	Thread inside metric
	M16M12M	M16M12M/6	M16 x 1.5	M12 x 1.5
	M20M12M	M20M12M/6	M20 x 1.5	M12 x 1.5
	M20M16M	M20M16M/6	M20 x 1.5	M16 x 1.5
	M25M16M	M25M16M/6	M25 x 1.5	M16 x 1.5
	M25M20M	M25M20M/6	M25 x 1.5	M20 x 1.5
	M32M20M	M32M20M/6	M32 x 1.5	M20 x 1.5
	M32M25M	M32M25M/6	M32 x 1.5	M25 x 1.5
	M40M25M	M40M25M/6	M40 x 1.5	M25 x 1.5
	M40M32M	M40M32M/6	M40 x 1.5	M32 x 1.5
	M50M32M	M50M32M/6	M50 x 1.5	M32 x 1.5
	M50M40M	M50M40M/6	M50 x 1.5	M40 x 1.5
	M63M40M	M63M40M/6	M63 x 1.5	M40 x 1.5
	M63M50M	M63M50M/6	M63 x 1.5	M50 x 1.5

Reduction of threaded or clearance holes to smaller thread sizes  
 Nickel-plated brass  
 Temperature range: -60°C to +200°C  
 Round form without O-ring, XXXX/6 hexagonal form with O-ring

#### Type NR - Reducer, PG

	Order no.	Thread outside PG	Thread inside PG	Length (mm)	Inside Ø (mm)	Outside Ø (mm)
	1109N	11	09	22.5	10.5	24.5
	1309N	13.5	09	15.0	10.0	26.0
	1311N	13.5	11	24.0	11.5	26.0
	1609N	16	09	16.0	10.0	29.0
	1611N	16	11	16.0	11.5	29.0
	1613N	16	13.5	27.0	13.5	29.0
	2113N	21	13.5	16.0	13.5	35.5
	2116N	21	16	16.0	15.5	35.5
	2921N	29	21	17.0	22.0	43.0
	3629N	36	29	24.0	30.5	54.0

Reduction of threaded or clearance holes to smaller PG thread sizes  
 High-grade, glass fibre reinforced Polyamid 6  
 Temperature range: -30°C to +100°C

## Enlargers, reducers, PG

### Type ME & MR

#### Type ME - Enlarger, brass, PG thread

	Order no. metal, standard	Thread outside		Thread inside		Outside Ø (mm)	Overall length (mm)
		PG	Length (mm)	PG	Length (mm)		
	0709M	07	5.0	09	07	17.0	15.0
	0911M	09	6.0	11	07	20.0	16.5
	0913M	09	6.0	13	7.5	22.0	17.5
	1113M	11	6.0	13	08	22.0	17.5
	1116M	11	6.5	16	8.5	24.0	19.0
	1121M	11	6.5	21	10	30.0	21.0
	1316M	13.5	6.5	16	7.5	24.0	19.0
	1321M	13.5	6.5	21	8.5	30.0	21.0
	1621M	16	6.5	21	8.5	30.0	21.0
	1629M	16	6.5	29	11	39.0	22.5
	2129M	21	7.0	29	11.5	39.0	23.0
	2936M	29	8.0	36	12	50.0	27.5
	4248M	42	10.0	48	17	64.0	33.0

For enlargement of an existing thread  
Nickel-plated brass  
Temperature range: -60°C to +200°C

#### Type MR - Reducer, brass, PG thread

	Order no. metal, standard	Thread outside		Thread inside PG	Outside Ø (mm)	Overall length (mm)
		PG	Length (mm)			
	0907M	09	6.0	07	17.0	8.5
	1107M	11	6.0	07	20.0	8.5
	1109M	11	6.0	09	20.0	8.5
	1307M	13.5	6.5	07	22.0	9.0
	1309M	13.5	6.5	09	22.0	9.0
	1311M	13.5	6.5	11	22.0	9.0
	1607M	16	6.5	07	24.0	9.5
	1609M	16	6.5	09	24.0	9.5
	1611M	16	6.5	11	24.0	9.5
	1613M	16	6.5	13.5	24.0	9.5
	2111M	21	7.0	11	30.0	10.0
	2113M	21	7.0	13.5	30.0	10.0
	2116M	21	7.0	16	30.0	10.0
	2916M	29	8.0	16	39.0	11.5
	2921M	29	8.0	21	39.0	11.5
	3621M	36	9.0	21	50.0	12.5
	3629M	36	9.0	29	50.0	12.5
	4229M	42	10	29	57.0	14.0
	4236M	42	10	36	57.0	14.0
	4836M	48	10	36	64.0	14.0
4842M	48	10	42	64.0	14.0	

Reduction of threaded or clearance holes to smaller thread sizes  
Nickel-plated brass  
Temperature range: -60°C to +200°C

## Plug screws, metric, PG

### Type 514

#### Type 514 - Plug screw, metric/PG thread

	Order no. grey	Fits to thread metric	Outside Ø (mm)	Height (mm)	Thread length (mm)
	514-M12	M12 x 1.5	15.0	10.0	6.0
	514-M16	M16 x 1.5	20.0	10.5	6.0
	514-M20	M20 x 1.5	24.0	10.5	6.0
	514-M25	M25 x 1.5	30.0	13.0	8.0
	514-M32	M32 x 1.5	37.0	13.5	8.0
	514-M40	M40 x 1.5	46.0	14.0	8.0
	514-M50	M50 x 1.5	56.0	16.5	10.0
	514-M63	M63 x 1.5	70.0	17.0	12.0
		Order no. grey	Fits to thread PG	Outside Ø (mm)	Height (mm)
	514-07	07	15.0	10.0	6.0
	514-09	09	19.0	10.0	6.0
	514-11	11	22.0	10.0	6.0
	514-13	13.5	25.0	10.0	6.0
	514-16	16	27.0	10.0	6.0
	514-21	21	33.0	12.5	8.0
	514-29	29	44.5	13.0	8.0
	514-36	36	55.5	15.0	10.0
	514-48	48	69.5	17.0	12.0

For closing off unused threaded holes  
 Polyamide 6 glass fibre reinforced  
 Free from halogens and cadmium  
 IP54  
 Temperature range: -30°C to +100°C

## Lock nuts, metric, PG

### Type MN

#### Type MN - Hexagonal lock nut, polyamide, metric/PG thread

	Order no. black	Order no. grey	Fits to thread metric	Wrench size (mm)	Height (mm)
	BMN-M12	GMN-M12	M12 x 1.5	17	5.0
	BMN-M16	GMN-M16	M16 x 1.5	22	5.0
	BMN-M20	GMN-M20	M20 x 1.5	26	5.6
	BMN-M25	GMN-M25	M25 x 1.5	32	6.0
	BMN-M32	GMN-M32	M32 x 1.5	41	7.0
	BMN-M40	GMN-M40	M40 x 1.5	50	7.0
	BMN-M50	GMN-M50	M50 x 1.5	60	8.0
	BMN-M63	GMN-M63	M63 x 1.5	75	8.0
	Order no. black	Order no. grey	Fits to thread PG	Wrench size (mm)	Height (mm)
	BMN-07	GMN-07	07	19	5.0
	BMN-09	GMN-09	09	22	5.0
	BMN-11	GMN-11	11	24	5.0
	BMN-13	GMN-13	13.5	27	6.0
	BMN-16	GMN-16	16	30	6.0
	BMN-21	GMN-21	21	36	7.0
	BMN-29	GMN-29	29	46	7.0
	BMN-36	GMN-36	36	60	8.0
	BMN-48	GMN-48	48	70	8.0

Glass fibre reinforced Polyamid 6  
High tightening torques

## Lock nuts, metric, PG

### Type MM

#### Type MM - Hexagonal lock nut, brass, metric/PG thread

	Order no.	Fits to thread metric	Wrench size (mm)	Height (mm)
	GMM-M12	M12 x 1.5	15	2.8
	GMM-M16	M16 x 1.5	19	2.8
	GMM-M20	M20 x 1.5	24	3.0
	GMM-M25	M25 x 1.5	30	3.5
	GMM-M32	M32 x 1.5	36	4.0
	GMM-M40	M40 x 1.5	46	4.5
	GMM-M50	M50 x 1.5	60	5.0
	GMM-M63	M63 x 1.5	70	5.5
	Order no.	Fits to thread PG	Wrench size (mm)	Height (mm)
	GMM-07	07	15	2.8
	GMM-09	09	18	2.8
	GMM-11	11	21	3.0
	GMM-13	13.5	23	3.0
	GMM-16	16	26	3.0
	GMM-21	21	32	3.5
	GMM-29	29	41	4.0
	GMM-36	36	51	5.0
	GMM-42	42	60	5.0
	GMM-48	48	64	5.5

Nickel-plated brass

Maximum possible torque

Safe system connection

## System supports, half-shells

### Type VH & GN

#### Type VH - System support

	Order no. support ①	Order no. clip ①	Order no. complete ①	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
				NW	Metric		
	BVH-17-010	BVH-17-020	BVH-17-000	17	20	35 x 36 x 36	6 x M5
	BVH-23-010	BVH-23-020	BVH-23-000	23	25	35 x 44 x 36	6 x M5
	BVH-29-010	BVH-29-020	BVH-29-000	29	32	46 x 52 x 40	6 x M5
	BVH-36-010	BVH-36-020	BVH-36-000	36	40	53 x 58 x 60	6 x M5
	BVH-48-010	BVH-48-020	BVH-48-000	48	50	66 x 72 x 60	6 x M5

For applications in machine building and installation  
 Optimal axial strain relief due to integrated rib  
 Variable fixation possible due to six holes, safe against turning  
 With safety lid suitable for overhead installation  
 High retention forces  
 PA 6

#### Type GN - Half shell

	Order no. fine profile, black	Order no. coarse profile, black	Fits to conduit size		Outside Ø (mm)	Width (mm)
			NW	Metric		
	BGN-S12T	–	12	16	26.5	34.0
	BGN-S17T	BGN-S17G	17	20	32.0	34.0
	BGN-S23T	BGN-S23G	23	25	39.5	34.0
	BGN-S29T	BGN-S29G	29	32	47.0	34.0
	BGN-S36T	–	36	40	55.0	36.5
	–	BGN-S36G	36	40	55.0	34.0
	BGN-S48T	–	48	50	66.5	36.5
	–	BGN-S48G	48	50	66.5	34.0
	–	BGN-S70G	70	80	93.5	38.0

For conduit fixation in conjunction with beam systems, particularly in traction and machine applications  
 Fixes conduit against axial movements  
 Allows radial turning of conduit  
 Especially suitable for dynamic applications due to rounded edges  
 PA 6

① Please replace “B” for black with “S” for grey in front of the order no.

## System supports, rails for system supports

### Type FH-0 & FHS

#### Type FH-0 - System support, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
			NW	Metric		
	BFH-07-0	SFH-07-0	07	10	17.0 x 21.5 x 20.0	1 x M4
	BFH-10-0	SFH-10-0	10	12	20.5 x 24.5 x 20.0	1 x M5
	BFH-12-0	SFH-12-0	12	16	24.0 x 27.0 x 20.0	1 x M5
	BFH-17-0	SFH-17-0	17	20	30.0 x 34.0 x 20.0	1 x M6
	BFH-23-0	SFH-23-0	23	25	38.5 x 42.0 x 20.0	1 x M6
	BFH-29-0	SFH-29-0	29	32	45.5 x 48.0 x 20.0	1 x M6
	BFH-36-0	SFH-36-0	36	40	55.5 x 56.0 x 20.0	1 x M6
	BFH-48-0	SFH-48-0	48	50	67.5 x 68.0 x 20.0	1 x M6

For applications in machine building and installation  
 Optimal axial strain relief due to integrated rib  
 Suitable for overhead installations due to safety lid  
 High retention forces  
 Quick mounting due to single hole fixing  
 Fits to rail for system support FHS  
 PA 6

#### Type FHS - Rail for system support

	Order no. black	Order no. grey	Fits to system supports	Length x Height x Depth (mm)
FHS	BFHS-00	SFHS-00	FH-NW-0	275.0 x 15.5 x 25.0
	Additional position supports or distance spacers			
	BFHS-PH	SFHS-PH	Position support with screws	
	BFHS-PH1	SFHS-PH1	Distance spacers	

For flexible assembly of one-piece system supports and/or fixation of various conduit sizes  
 Glass fibre reinforced polyamide 6  
 Extremely robust construction  
 High stiffness  
 Positioning and distance spacers available  
 Glass fibre reinforced PA6

## Tube clamps

### Type GL & GH

#### Type GL - Tube clamp, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Fixing screws
			NW	Metric		
	BGL-07	SGL-07	07	10	25.0	1 x M4
	BGL-10	SGL-10	10	12	27.0	1 x M4
	BGL-12	SGL-12	12	16	31.0	1 x M4
	BGL-17	SGL-17	17	20	39.5	1 x M5
	BGL-23	SGL-23	23	25	49.0	1 x M5
	BGL-29	SGL-29	29	32	57.0	1 x M6

Used in general machine and installation applications  
 Integrated rib provides axial strain relief  
 Allows turning of the conduit, thus avoiding torsion stresses  
 Pre-fixation on the conduit possible  
 PA 6

#### Type GH - Tube clamp, one-piece

	Order no. black	Order no. grey	Thread outside		Width (mm)	Fixing screws
			NW	Metric		
	BGH-23	SGH-23	23	25	16.0	2 x M5
	BGH-29	SGH-29	29	32	19.0	2 x M6
	BGH-36	SGH-36	36	40	24.0	2 x M6
	BGH-48	SGH-48	48	50	24.0	2 x M6
	BGH-56	SGH-56	56	68	26.0	2 x M8
	BGH-70	SGH-70	70	80	30.0	2 x M8
	BGH-95	SGH-95	95	106	30.0	2 x M8

Used in general machine and installation applications  
 Integrated rib provides axial strain relief  
 Allows turning of the conduit, thus avoiding torsion stresses  
 Pre-fixation on the conduit possible  
 Allows solid fixation with 2 screws  
 PA 6

## Tube clamps

### Type SGB & SGS

#### Type SGB - Tube clamp

	Order no. black	Fits to conduit size		Width (mm)	Fixing screws
		NW	Metric		
	SGB-07	07	10	13.0	1 x M4
	SGB-09	10	12	13.0	1 x M4
	SGB-11	12	16	13.0	1 x M4
	SGB-16	17	20	16.0	1 x M5
	SGB-21	23	25	16.0	1 x M5
	SGB-29	29	32	19.0	1 x M6
	SGB-36	36	40	19.0	1 x M6
	SGB-48	48	50	19.0	1 x M6

For fixation of static conduits  
Galvanized steel  
Elastomer profile (EPDM) free from halogens  
Smooth connection to PMA conduits  
Good resistance to ozone and ageing  
Temperature range: -40°C to +120°C

#### Type SGS - Tube clamp

	Order no. black	Fits to conduit size		Width x Height x Depth (mm)	Fixing screws
		NW	Metric		
	SGS-36	36	40	80.0 x 48.0 x 19.0	2 x M6
	SGS-48	48	50	94.0 x 58.0 x 19.0	2 x M6
	SGS-56	56	68	118.0 x 72.0 x 24.0	2 x M8
	SGS-70	70	80	130.0 x 85.0 x 24.0	2 x M8
	SGS-95	95	106	156.0 x 110.0 x 24.0	2 x M8
	SGS-125	125	146	200.0 x 152.0 x 24.0	2 x M8

For fixation of static conduits  
Galvanized steel  
Elastomer profile (EPDM) free from halogens  
Smooth connection to PMA conduits  
Good resistance to ozone and ageing  
Temperature range: -40°C to +120°C  
Galvanized steel/EPDM

## System supports

### Type GPS, GP & BGP-3x48

#### Type GPS - System support, one-piece, stackable

	Order no.	Fits to conduit size			Width (mm)	Height (mm)	Depth (mm)
		NW	Metric	DIN-NW			
	BGPS-12/01*	12	16	2	70.0	51.0	30.0
	BGPS-17	17	20	2	70.0	51.0	30.0
	BGPS-23	23	25	2	70.0	51.0	30.0
	BGPS-29	29	32	3	85.0	65.0	30.0
	BGPS-36	36	40	3	85.0	65.0	30.0
	BGPS-48	48	50	4	115.0	92.5	30.0
	BGPS-56	56	68	4	115.0	92.5	30.0

\*This size will be delivered with a half-shell insert

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Heavy design, high retention forces. Applicable with standard metal C rails

Clasp for easy pre-mounting and final assembly. Especially suitable for dyn. applic. due to rounded edges

The following nominal widths can be combined for stacking: NW 12 with NW 17 + 23, NW 17 with NW 23,

NW 29 with NW 36, NW 48 with NW 56

Content of delivery: System support and 2 screws for securing of the lid (optional); without mounting accessories

PA 6

#### Type GP - System support, stackable

	Order no. ①	Thread outside		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
	BGP-12/01*	12	16	48.0	66.0	36.0
	BGP-17	17	20	48.0	66.0	36.0
	BGP-23	23	25	48.0	66.0	36.0
	BGP-29	29	32	62.0	66.0	36.0
	BGP-36	36	40	62.0	66.0	36.0
	BGP-48	48	50	76.0	66.0	36.0
	BGP-56G	56	68	87.0	78.0	36.0

\*This size will be delivered with a half-shell insert

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Variable stacking possibilities, due to the "Block"-system a high rigidity is guaranteed

Fixes conduit against axial movements. Allows radial turning of conduit

Especially suitable for dyn. applic. due to rounded edges. Variety of support possibilities

Content of delivery: System support with assembling screws; without mounting accessories

PA 6

#### Type BGP-3x48- Multiple system support

	Order no.	Thread outside			Width (mm)	Height (mm)	Length (mm)
		NW	Metric	Profile			
	BGP-3x48	48	50	G and T	30.0	84.0	214.0

In railway vehicle construction, heavy machine building industry and other applications with increased mechanical requirements

Multiple system support for 3 x NW48 max. conduits

Axial fixation of conduit. Conduit rotation possible (avoids torsion)

Especially suitable for dynamic applications due to rounded edges

PA 6

① Please replace "B" for black with "S" for grey in front of the order no.

## Conduit terminations

### Type RKS & CT

#### Type RKS - Conduit terminal sleeve

	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Length (mm)
		NW	Metric			
	RKS-07	07	10	4.5	12.5	16.0
	RKS-10	10	12	8.0	15.5	16.0
	RKS-12	12	16	10.0	19.0	20.0
	RKS-17	17	20	13.0	24.0	21.0
	RKS-23	23	25	20.0	32.0	22.0
	RKS-29	29	32	25.0	38.0	22.0
	RKS-36	36	40	33.0	46.0	25.0
	RKS-48	48	50	45.0	58.0	25.0
	RKS-56	56	68	54.0	71.0	28.0

For clean conduit end termination where no fitting is required  
PA 6

#### Type CT - Conduit termination

	Order no. black	Fits to conduit size		Clamping range (mm)	Length (mm)	Height (mm)
		NW	Metric			
	BCT-10	10	12	4-8	28.0	13.0
	BCT-12	12	16	5-9	35.0	16.0
	BCT-17	17	20	7-14	42.0	21.0
	BCT-23	23	25	14-22	51.0	28.0
	BCT-29	29	32	16-22	53.0	34.0
	BCT-36	36	40	16-29	55.0	42.0

For sealing of cables and wires at the exit from PMA corrugated conduits  
Avoids ingress of dirt and liquids  
Can be fixed additionally with cable ties  
Neoprene rubber  
Temperature range: -30°C to +120°C

## Abrasion protection sleeves, tools

### Type SS/SV & EWZ

#### Type SS/SV - Abrasion protection sleeve

	Order no.	Fits to conduit size		Outside Ø (mm)	Length (mm)
		NW	Metric		
	BSS-17	17	20	42.0	22.0
	BSS-23	23	25	49.0	26.0
	BSS-29	29	32	55.0	26.0
	BSS-36	36	40	63.0	30.0
	BSS-48	48	50	75.0	30.0
	BSS-56G	56	68	90.0	33.0
	BSV-70G	70	80	108.0	60.0

Abrasion protection for corrugated conduits in positions exposed to chafing  
Increases the life time of moving conduits  
PA 6

#### Type EWZ - Draw-in tool

	Order no. black with hole	Order no. black with handle	Fits to conduit size NW	Width x Length x Depth (mm)
EWZ	EWZ-02	EWZ-03	7.5–34	117.7 x 45.2 x 71.9



Suitable for drawing in cables or wires into PMA Divisible System conduits or other slit conduits  
Designed in a handy shape and equipped with a practical hand grip for wedging or with hole for direct holding of the wires  
Polyamide 6.6  
Colour: black

## Tools

### Type PMACUT

#### Type PMACUT - Cutting tool for conduits, NW 07-48

	Order no. Cutting tool	Order no. Spare blade	Cutting range	For conduit size NW
PMACUT	PMACUT-38	FP-38	0-38	07-29
	PMACUT-52	FP-52	0-52	23-48



Can be used to cut all PMA conduits  
 Enables a precise and straight cut around the corrugation  
 Metal  
 Colour: Red

#### Type PMACUT - Cutting tool for conduits, NW 56-125

PMACUT	Order no. black	Fits to conduit size		Length x Width x Depth (mm)
		NW	Metric	
	PMACUT-NW56	56	68	337 x 101 x 15
	PMACUT-NW70	70	80	350 x 110 x 15
	PMACUT-NW95	95	106	400 x 142 x 20
	PMACUT-NW125	125	146	443 x 182 x 20



Can be used to cut all PMA conduits with large nominal widths  
 Enables a precise and straight cut at the top of the corrugation  
 High level of safety through retractable blade  
 Aluminium

## Elbow adapters, metric

### Type MAVI & MAVIK

#### Type MAVI - Special 45° elbow adapter, metric thread

	Order no.	Thread metric		Thread length outside (mm)	Outside Ø (mm)	Overall length (mm)
		Inside	Outside			
	MAVI-M20/01	M20 x 1.5	M20 x 1.5	10.0	35.0	45.0
	MAVI-M25/01	M25 x 1.5	M25 x 1.5	11.0	39.0	51.0
	MAVI-M32/01	M32 x 1.5	M32 x 1.5	13.0	46.0	54.0
	MAVI-M40/01	M40 x 1.5	M40 x 1.5	13.0	55.0	62.0
	MAVI-M50/01	M50 x 1.5	M50 x 1.5	14.0	65.0	75.0
	MAVI-M63/01	M63 x 1.5	M63 x 1.5	14.0	80.0	84.0

Where a certain cable outlet angle is required

In connection with PMA connectors, especially connectors with strain relief VNZ

Enables different mounting positions: With a lock nut behind a clearance hole / In threaded holes (lock nut on MAVI side for positioning) / With SCA spin-coupler

Nickel-plated aluminium (other materials e.g. stainless steel or nickel-plated brass available on request)

High thread and system connection strength

IP68 static/IP67 dynamic

Temperature range: -60°C to +105°C

#### Type MAVIK - Positioning 45° elbow adapter, metric thread

	Order no.	Thread metric		Thread length outside (mm)	Outside Ø (mm)	Overall length (mm)
		Inside	Outside			
	MAVIK-M20/01	M20 x 1.5	M20 x 1.5	10.0	35.0	52.0
	MAVIK-M25/01	M25 x 1.5	M25 x 1.5	11.0	39.0	58.0
	MAVIK-M32/01	M32 x 1.5	M32 x 1.5	13.0	46.0	61.0
	MAVIK-M40/01	M40 x 1.5	M40 x 1.5	13.0	55.0	69.5
	MAVIK-M50/01	M50 x 1.5	M50 x 1.5	14.0	65.0	83.0
	MAVIK-M63/01	M63 x 1.5	M63 x 1.5	14.0	80.0	92.0

Where a certain cable outlet angle is required

In connection with PMA connectors, especially connectors with strain relief VNZ

The counter nut allows accurate positioning of the outlet direction in threaded holes

Adapter made from nickel-plated aluminium (other materials e.g. stainless steel or nickel-plated brass available on request), counter nut made from nickel-plated brass

High thread and system connection strength

IP68 static/IP67 dynamic

Temperature range: -60°C to +105°C

## Swivel and positioning adapters, metric, PG

### Type SWA & SCA

#### Type SWA - Swivel adapter with special sealing, metric/PG metal thread

	Order no.	Thread metric	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SWA-M16-10	M16 x 1.5	10.0	23.0	37.5
	SWA-M20-10	M20 x 1.5	10.0	27.0	38.5
	SWA-M25-11	M25 x 1.5	11.0	32.0	41.0
	SWA-M32-13	M32 x 1.5	13.0	45.0	46.5
	SWA-M40-13	M40 x 1.5	13.0	55.0	47.5
	SWA-M50-14	M50 x 1.5	14.0	59.0	49.5
	SWA-M63-14	M63 x 1.5	14.0	75.0	52.0
	Order no.	Thread PG	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SWA-P09	09	15.0	23.0	44.5
	SWA-P11	11	15.0	27.0	45.5
	SWA-P16	16	15.0	32.0	48.0
	SWA-P21	21	15.0	40.0	51.0
	SWA-P29	29	15.0	50.0	52.0
	SWA-P36	36	15.0	59.0	55.0
	SWA-P48	48	15.0	70.0	55.0

Allow PMA connectors to swivel freely in applications where such movement is occasionally necessary

In connection with PMA connectors with metal thread

Nickel-plated brass with thread edge protection

IP68 and IP69

Temperature range: -40°C to +105°C

#### Type SCA - Positioning adapter, metric/PG metal thread

	Order no.	Thread metric	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SCA-M16-10	M16 x 1.5	10.0	22.0	32.0
	SCA-M20-10	M20 x 1.5	10.0	26.0	33.0
	SCA-M25-11	M25 x 1.5	11.0	32.0	35.0
	SCA-M32-13	M32 x 1.5	13.0	39.0	39.5
	SCA-M40-13	M40 x 1.5	13.0	50.0	41.0
	SCA-M50-14	M50 x 1.5	14.0	59.0	43.5
	SCA-M63-14	M63 x 1.5	14.0	75.0	45.5
	Order no.	Thread PG	Thread length (mm)	Outside Ø (mm)	Overall length (mm)
	SCA-P09	09	12.0	22.0	35.0
	SCA-P11	11	12.0	26.0	36.0
	SCA-P16	16	13.0	29.0	38.0
	SCA-P21	21	14.0	39.0	41.0
	SCA-P29	29	14.0	44.0	42.5
	SCA-P36	36	17.0	59.0	49.0
	SCA-P48	48	17.0	69.0	50.5

Allows easy positioning of elbow connectors with metal thread

In connection with PMA connectors with metal thread (Metric: Metal long thread)

Nickel-plated brass

High fastening torque with thread edge protection

P68 and IP69

Temperature range: -40°C to +105°C

# PMA JUMBO sizes

## General technical details

Larger sizes for big solutions. When you need conduits with larger sizes for your cable protection, we provide you with a comprehensive selection of large size conduits including connectors and flanges.

—  
\* All conduits are REACH and RoHS compliant

The PMA JUMBO product line includes a range of large size cable protection products. Seven different conduit types using a variety of raw materials to provide optimal performance in various applications and compatible fittings.

- PMA JUMBO conduits polyamide and polyurethane conduits in the large nominal width sizes NW56, 70, 95, 125 (PA6 conduits – PCL, CYL, VCS, VOH) (PA12 conduits – PIS, PCS) (PU conduits – PUE)
- PMAGRIP flange and threaded fittings plus accessories BGG (straight), BGO (90°) flange fittings achieve a sealing rating of IP50 and IP65 with a conduit sealing ring BGGV (straight), BGOV (90°) flange fittings achieve a sealing rating of IP68

### Material

- Conduits made from specially formulated PA6, PA12 and PU
- Fittings made from specially formulated polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant\*
- Very good chemical properties
- Temperature range:  
PA6 –40°C to +105°C, short-term to +160°C  
PA12 –40°C to +95°C, short-term to +150°C  
PU –60°C to +50°C

### Characteristics

- Excellent conduit pull-out strength
- High impact resistance
- All PMA Jumbo conduits have a coarse (G) profile
- The conduit types PIS and VCS are UL recognized in jumbo sizes for use with the flange type fittings.





## Conduits, large sizes

### Type PMAFLEX JUMBO conduits

#### Type PMAFLEX JUMBO conduits

PMAFLEX JUMBO conduits



	Order no. black	Order no. grey	Conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat./Dyn. radius (mm)	PU meter
			NW	Metric				
	PCLG-56B	PCLG-56S	56	68	56.3	67.2	130/-	30
	PCLG-70B	PCLG-70S	70	80	67.5	80.0	160/-	10
	PCLG-95B	PCLG-95S	95	106	91.5	106.0	210/-	10
	PCLG-125B	PCLG-125S	125	146	126.5	146.5	450/-	6
	PIHG-56B	PIHG-56S	56	68	56.3	67.2	110/270	30
	PIHG-70B	PIHG-70S	70	80	67.2	79.6	150/350	30
	PIHG-95B	PIHG-95S	95	106	91.3	106.0	170/450	30
	PIHG-125B	PIHG-125S	125	146	126.5	146.5	350/480	20
	VCSG-56B	VCSG-56S	56	68	56.1	67.2	150/-	30
	VCSG-70B	VCSG-70S	70	80	66.5	80.0	200/-	10
	VCSG-95B	VCSG-95S	95	106	91.0	106.0	300/-	10
	LLPAG-56A	LLPAG-56S	56	68	56.3	67.2	120/-	30
	LLPAG-70A	LLPAG-70S	70	80	68.0	80.0	160/-	10
	LLPAG-95A	LLPAG-95S	95	106	91.9	106.0	210/-	10
	LLPAG-125A	LLPAG-125S	125	146	126.5	146.5	450/-	6
	VOHG-56B	VOHG-56S	56	68	55.5	67.2	135/-	10
	VOHG-70B	VOHG-70S	70	80	67.0	80.0	200/-	10
	VOHG-95B	VOHG-95S	95	106	90.5	106.0	300/-	10
	VOHG-125B	VOHG-125S	125	146	126.0	146.5	480/-	6
	PCSG-56B	PCSG-56S	56	68	56.1	67.2	130/280	30
	PCSG-70B	PCSG-70S	70	80	66.5	80.0	170/360	10
	PCSG-95B	PCSG-95S	95	106	91.0	106	250/470	10
	PUEG-56B	-	56	68	56.3	67.2	90/170	30
	PUEG-70B	-	70	80	68.2	80.5	100/220	30

#### Approvals



For further conduits and other sizes see conduit guide

## PMAGRIP flange connectors

### Type GG & GO

#### Type GG - Flange straight

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
			NW	Metric			
GG	BGG-56	SGG-56	56	68	82.0	97.0	42.0
	BGG-70	SGG-70	70	80	97.0	114.0	48.0
	BGG-95	SGG-95	95	106	126.0	146.0	53.0
	BGG-125	SGG-125	125	146	-	194.0	79.0



#### Approvals



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)  
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications  
 Flange seal FGO4/01 made from NBR, optional for indoor applications with special chemical requirements  
 Temperature range with FGO4: -40°C to +105°C  
 Temperature range with FGO4/01: -25°C to +70°C  
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), flange seal (FGO4 or FGO4/01), conduit seal ring (optional for IP65)

#### Type GO - Flange 90° elbow

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
			NW	Metric			
GO	BGO-56	SGO-56	56	68	82.0	97.0	101.0
	BGO-70	SGO-70	70	80	97.0	114.0	115.0
	BGO-95	SGO-95	95	106	126.0	146.0	149.0



#### Approvals



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)  
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications  
 Flange seal FGO4/01 made from NBR, optional for indoor applications with special chemical requirements  
 Temperature range with FGO4: -40°C to +105°C  
 Temperature range with FGO4/01: -25°C to +70°C  
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), flange seal (FGO4 or FGO4/01), conduit seal ring (optional for IP65)

## PMAGRIP flange connectors

### Type GGV & GOV

#### Type GGV - Flange straight

	Order no. black, IP68	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
GGV	BGGV-56	56	68	82.0	97.0	42.0
	BGGV-70	70	80	97.0	114.0	48.0
	BGGV-95	95	106	126.0	146.0	53.0



#### Approvals



In railway vehicle construction as well as in a wide range of industrial applications with high sealing and safety requirements  
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications  
 Flange seal FGO4/01 made from NBR on request, optional for indoor applications with special chemical requirements  
 Ingress protection: IP68, IP69 with conduit sealing NVN3  
 Temperature range with FGO4: -40°C to +105°C  
 Temperature range with FGO4/01: -25°C to +70°C  
 If the application temperature is above 70°C we recommend to use an additional internal conduit support sleeve (BES)  
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), conduit seal (NVN3), flange seal (FGO4 or FGO4/01)

#### Type GOV - Flange 90° elbow

	Order no. black, IP68	Fits to conduit size		Width (mm)	Height (mm)	Depth (mm)
		NW	Metric			
GOV	BGOV-56	56	68	82.0	97.0	101.0
	BGOV-70	70	80	97.0	114.0	115.0
	BGOV-95	95	106	126.0	146.0	149.0



#### Approvals



In railway vehicle construction as well as in a wide range of industrial applications with high sealing and safety requirements  
 Flange seal FGO4 made from EPDM, standard for indoor and outdoor applications  
 Flange seal FGO4/01 made from NBR on request, optional for indoor applications with special chemical requirements  
 Ingress protection: IP68, IP69 with conduit sealing NVN3  
 Temperature range with FGO4: -40°C to +105°C  
 Temperature range with FGO4/01: -25°C to +70°C  
 If the application temperature is above 70°C we rec. to use an additional internal conduit support sleeve (BES)  
 Content of delivery: Flange part, fixation clamps (incl. 2 screws), conduit seal (NVN3), flange seal (FGO4 or FGO4/01)

## PMAGRIP threaded connectors

### Type GG & GI

#### Type GG - Connector straight with locking clamps, metric/PG thread

	Order no. black	Order no. grey	Thread	Fits to conduit size		Thread length (mm)	Outside Ø (mm)	Overall length (mm)
				NW	Metric			
GG	BGG-M6356	SGG-M6356	M63 x 1.5	56	68	18.0	98.0	57.5
	BGG-P3656	SGG-P3656	PG 36	56	68	18.0	98.0	57.3



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)  
 Content of delivery: Threaded part, fixation clamps (incl. 2 screws), conduit seal ring (optional for IP65)

#### Type GI - Connector straight with locking clamps, metric female thread

	Order no. black	Order no. grey	Thread	Fits to conduit size		Thread length (mm)	Outside Ø (mm)	Overall length (mm)
				NW	Metric			
GI	BGI-M7556	SGI-M7556	M75 x 1.5	56	68	15.0	98.0	53.3



Ingress protection: IP50 without conduit seal ring (IP65 with conduit seal ring)  
 Content of delivery: Threaded part, fixation clamps (incl. 2 screws), conduit seal ring (optional for IP65)

## Tube clamps, conduit seal rings, large size accessories

### Type GH & SGS

#### Type GH - Tube clamp, one-piece

	Order no. black	Order no. grey	Fits to conduit size		Width (mm)	Fixing screw
			NW	Metric		
GH	BGH-56	SGH-56	56	68	26.0	2 x M8
	BGH-70	SGH-70	70	80	30.0	2 x M8
	BGH-95	SGH-95	95	106	30.0	2 x M8



For general machine and installation applications  
 Integrated rib provides axial strain relief  
 Allows turning of the conduit thus avoiding torsion stresses  
 Pre-fixation on the conduit possible  
 Allows solid fixation with 2 screws  
 For other sizes of BGH tube clamps please see page 112  
 PA 6

#### Type SGS - Tube clamp

	Order no.	Fits to conduit size		Width x Height x Depth (mm)	Fixing screw
		NW	Metric		
SGS	SGS-36	36	40	80.0 x 48.0 x 19.0	2 x M6
	SGS-48	48	50	94.0 x 58.0 x 19.0	2 x M6
	SGS-56	56	68	118.0 x 72.0 x 24.0	2 x M8
	SGS-70	70	80	130.0 x 85.0 x 24.0	2 x M8
	SGS-95	95	106	156.0 x 110.0 x 24.0	2 x M8
	SGS-125	125	146	200.0 x 152.0 x 24.0	2 x M8



For fixation of static conduits  
 Galvanized steel  
 Elastomer profile (EPDM) free from halogens  
 Smooth connection to PMA conduits  
 Good resistance to ozone and ageing  
 Temperature range: -40°C to +120°C

## Tube clamps, conduit seal rings, large size accessories

### Type SGO3

#### Type SGO3 - Conduit seal ring

	Order no.	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Thickness (mm)
		NW	Metric			
	SGO3-56	56	68	49.5	61.0	1.5
	SGO3-70	70	80	61.5	74.0	1.5
	SGO3-95	95	106	86.0	102.0	1.5
	SGO3-125	125	146	122.0	142.0	2.0

Used at the conduit end for sealing between the PMAGRIP flanges GG/GO/GI and PMA JUMBO conduits  
 Nitrile rubber NBR  
 Temperature range: -40°C to +105°C

# PMA Divisible System

## General technical details

One-piece Divisible System. The ideal solution for repairs, retrofit and pre-loomed applications. Equally all PMA conduits are compatible.

PMA offers a divisible system based upon PMA standard nominal widths.

This allows free combination of the PACOF and PPCOF divisible conduits with PMAFIX Pro, PMAFIX and PMA Smart Line fittings. Using the PMA Divisible System Fittings repairs can be easily made to existing installations without disconnecting cables. Equally all PMA conduits – also slit – are compatible with the fittings of the divisible system.

### Material

- Conduits made from spec. formulated PA 6 and Polypropylene
- Fittings made from specially formulated polyamide 6
- Colour: Black
- Free from halogens, REACH + RoHS compliant
- Temperature range:  
Conduits:  $-40^{\circ}\text{C}$  to  $+160^{\circ}\text{C}$   
Connectors:  $-40^{\circ}\text{C}$  to min.  $+105^{\circ}\text{C}$

### Characteristics

- Fast installation
- Conduit can be installed in fitting prior to closing the fitting
- High impact resistance
- High conduit pull-out strength
- Fits conduit profiles – fine (T) and coarse (G)





## Conduits

### Type PACOF & PPCOF

#### Type PACOF - Flexible, divisible

	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU meter
		NW	Metric				
	PACOF-07B	07	10	5.6	10.0	30	50
	PACOF-10B	10	12	8.5	12.8	33	50
	PACOF-12B	12	16	11.0	15.6	35	50
	PACOF-17B	17	20	15.5	21.1	45	50
	PACOF-23B	23	25	22.1	28.4	70	50
	PACOF-29B	29	32	27.2	34.5	120	50
	PACOF-36B	36	40	32.0	42.4	145	30
	PACOF-48B	48	50	43.9	54.1	150	30
	PACOF-70B	70	80	62.0	79.0	190	10

#### PACOF Index

min.	max.	
Ductility		Can be opened and closed again in longitudinal direction any time Good ductility
Fatigue reversed bending		Good compression resistance
Compression resistance		Free from halogens, REACH + RoHS compliant
Low temperature performance		Temperature range: -40°C to +105°C, short-term to +160°C
Weathering resistance		IP50

#### Type PPCOF - Flexible, divisible

	Order no. black	Fits to conduit size		Inside Ø (mm)	Outside Ø (mm)	Stat. radius (mm)	PU meter
		NW	Metric				
	PPCOF-07B	07	10	5.6	10.0	25	50
	PPCOF-10B	10	12	8.5	12.8	28	50
	PPCOF-12B	12	16	11.0	15.6	35	50
	PPCOF-17B	17	20	15.1	21.1	45	50
	PPCOF-23B	23	25	22.1	28.4	60	50
	PPCOF-29B	29	32	26.6	34.5	100	50
	PPCOF-36B	36	40	31.8	42.4	120	30
	PPCOF-48B	48	50	43.9	54.1	140	30
	PPCOF-70B	70	80	60.5	78.0	200	10

#### PPCOF Index

min.	max.	
Ductility		Can be opened and closed again in longitudinal direction any time Good reversed bending resistance
Fatigue reversed bending		Temperature range: -20°C to +105°C, short-term to +150°C
Compression resistance		IP50
Low temperature performance		
Weathering resistance		

## Connectors, lock nuts

### Type LNO & LN

#### Type LNO - Divisible connector straight, one-piece, metric thread

	Order no. black	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
			NW	Metric		
	BLNO-M160	M16 x 1.5	10	12	13.0	37.5
	BLNO-M162	M16 x 1.5	12	16	13.0	39.5
	BLNO-M202	M20 x 1.5	12	16	13.0	39.5
	BLNO-M207	M20 x 1.5	17	20	13.0	43.5
	BLNO-M257	M25 x 1.5	17	20	14.0	44.5
	BLNO-M253	M25 x 1.5	23	25	14.0	52.5
	BLNO-M323	M32 x 1.5	23	25	17.0	56.0
	BLNO-M329	M32 x 1.5	29	32	17.0	61.0
	BLNO-M409	M40 x 1.5	29	32	21.0	65.0
	BLNO-M406	M40 x 1.5	36	40	22.0	74.5
	BLNO-M508	M50 x 1.5	48	50	22.0	80.5

Divisible connector straight, one-piece, metric thread

Compatible with PMA standard, slit and divisible conduits with standard nominal widths

In industries, plant construction, machine building as well as in house and electrical installations

For retrofit installation or repair

IP54

Special: Push-in installation of conduit into pre-installed fitting also possible

#### Type LN - Divisible lock nut, metric thread

	Order no. black	Thread metric	Fits with divisible connector		Wrench size (mm)	Width (mm)
			BLNO-M160	BLNO-M162		
	BLN-M16	M16 x 1.5	BLNO-M160	BLNO-M162	22.0	8.0
	BLN-M20	M20 x 1.5	BLNO-M202	BLNO-M207	26.0	8.0
	BLN-M25	M25 x 1.5	BLNO-M257	BLNO-M253	32.0	9.0
	BLN-M32	M32 x 1.5	BLNO-M323	BLNO-M329	41.0	12.0
	BLN-M40	M40 x 1.5	BLNO-M409	BLNO-M406	50.0	15.0
	BLN-M50	M50 x 1.5	BLNO-M508		60.0	15.0

Compatible with divisible PMA connectors, type BLNO

For retrofit installation or repair

Temperature range: -40°C to +100°C, short-term: +130°C

## T, Y pieces, connection splice

### Type LTO & LYO

#### Type LTO - Divisible T piece, one-piece

	Order no. black, IP40	3x conduit sizes	
		NW	Metric
	BLTO-070707	07	10
	BLTO-101010	10	12
	BLTO-121212	12	16
	BLTO-171717	17	20
	BLTO-232323	23	25
	BLTO-292929	29	32

Compatible with PMA standard, slit and divisible conduits with standard nominal widths  
 In industries, plant construction, machine building as well as in house and electrical installations  
 For retrofit installation or repair  
 IP40  
 Conduit can be installed in fitting prior to closing the fitting

#### Type LYO - Divisible Y piece, one-piece

	Order no. black, IP40	1x conduit size		2x conduit sizes	
		NW	Metric	NW	Metric
	BLYO-100707	10	12	07	10
	BLYO-121010	12	16	10	12
	BLYO-171212	17	20	12	16
	BLYO-231717	23	25	17	20
	BLYO-292917	17	20	29	32

Compatible with PMA standard, slit and divisible conduits with standard nominal widths  
 In industries, plant construction, machine building as well as in house and electrical installations  
 For retrofit installation or repair  
 IP40  
 Conduit can be installed in fitting prior to closing the fitting

## T, Y pieces, connection splice

### Type LSGO

#### Type LSGO - One-piece, divisible

	Order no. black, IP40	Fits to conduit size NW	Overall length (mm)	Outer Ø (mm)
LSGO	BLSGO-101010	10	36	16
	BLSGO-121212	12	36	21
	BLSGO-171717	17	38	26
	BLSGO-232323	23	39	33



Compatible with PMA standard, slit and divisible conduits with standard nominal widths  
 In industries, plant construction, machine building as well as in house and electrical installations  
 For retrofit installation or repair  
 Polyamide (Nylon) 66  
 IP40 rated

# PMA Smart Line IP66

## General technical details

Modern, versatile and attractive. Functional and modern design at an excellent value for money. Suitable for machine building, installation and construction industries.

One-piece design, IP66 protection and simple, fast installation are the outstanding features of the Smart Line. Other characteristics including a modern, functional design and an excellent price/performance ratio make this product line a very attractive solution.

### Material

- Fittings made from specially formulated polyamide 6
- Self-extinguishing
- Free from halogens, REACH + RoHS compliant
- Temperature range:  
–45°C to +105°C, short-term to +150°C

### Characteristics

- High impact resistance
- Good conduit pull-out strength
- Vibration-proof connection to PMA conduits
- Fits conduit profiles – fine (T) and coarse (G)
- To avoid accidental opening, disassembling only possible with a screwdriver





**PMA Smart Line**

General technical details




—  
Patent

—  
IP66



**IP66 static**

**IP54 dynamic**

- One piece fitting
- Conical sealing method
- Integrated sealing lip in thread flange
- Easy “push-in” installation
- Ready for installation (fitting gets delivered with engaged locking elements)

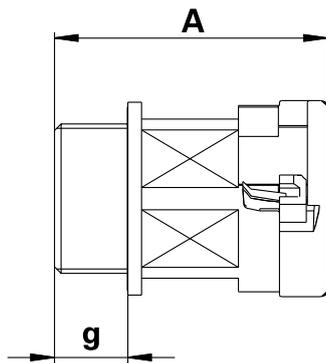


g = Thread length    A = Overall length

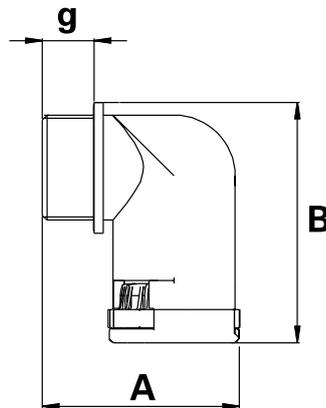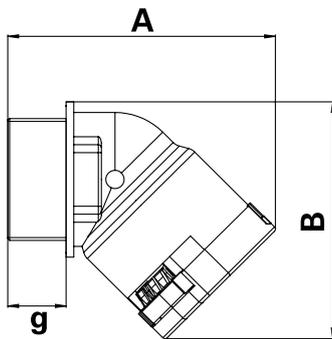

g = Thread length    A x B = External dimensions


## PMA Smart Line

### Part number codes

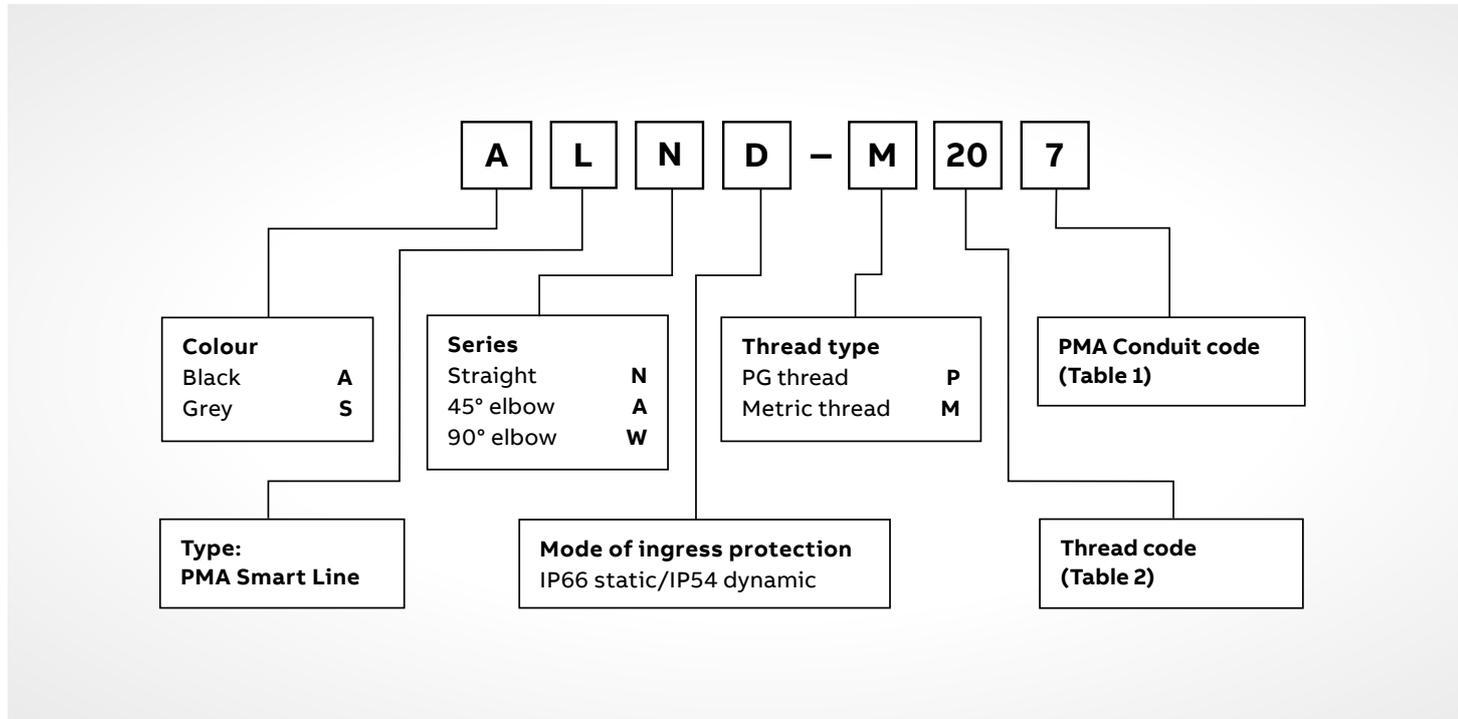


### Connector series


- 01 Straight (N)
- 02 45° elbow (A)
- 03 90° elbow (W)



01

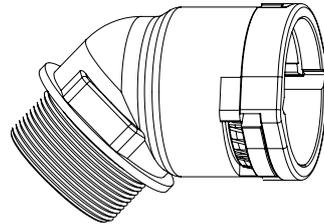

02

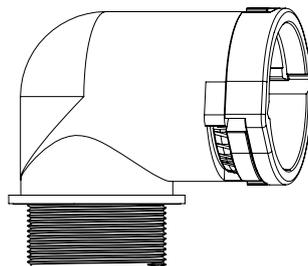

03

## PMA Smart Line

### Size codes, installation

Table 1: Conduit codes


Nominal width	Metric size	PMA code
07	10	M
10	12	0
12	16	2
17	20	7
23	25	3
29	32	9
36	40	6
48	50	8

Table 2: Thread codes

Thread Metric	PMA code
M12 x 1.5	M12
M16 x 1.5	M16
M20 x 1.5	M20
M25 x 1.5	M25
M32 x 1.5	M32
M40 x 1.5	M40
M50 x 1.5	M50
M63 x 1.5	M63


Thread PG	PMA code
PG07	P07
PG09	P09
PG11	P11
PG13.5	P13
PG16	P16
PG21	P21
PG29	P29
PG36	P36
PG48	P48

### Installation IP66

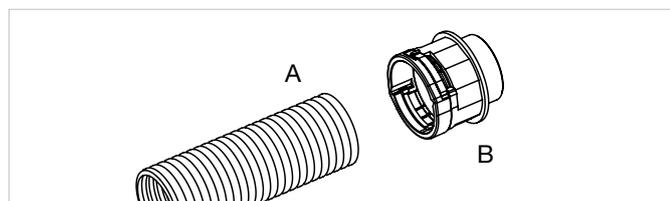


01

A = Conduit  
B = Fitting

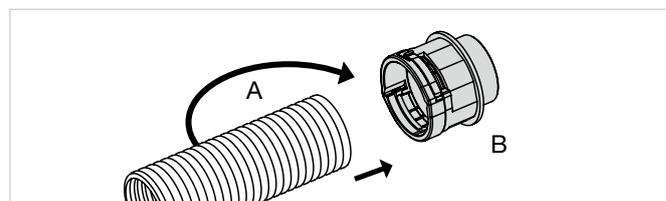


02

Push in the conduit (A) with a slight twist until the stop.

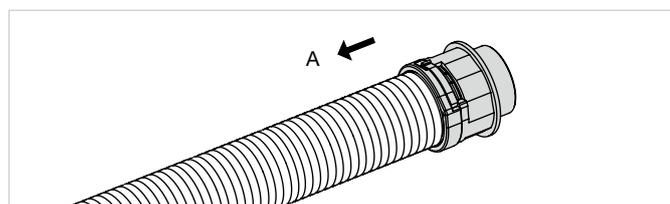

03

Pull back the conduit (A) slightly to ensure the locking mechanism is fully engaged.

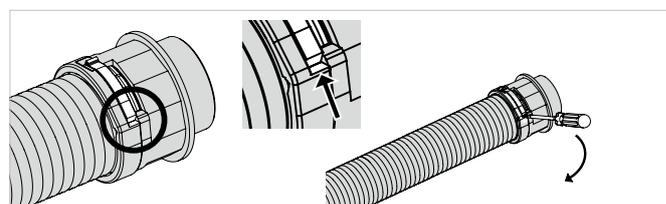

04

To disengage the locking mechanism use a size 1 screwdriver.

## Connectors, metric, polyamide thread

### Type LND & LAD

#### Type LND - Connector straight, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
LND, patent 	ALND-M120	SLND-M120	M12 x 1.5	10	12	11.0	34.0
	ALND-M160	SLND-M160	M16 x 1.5	10	12	11.0	34.0
	ALND-M162	SLND-M162	M16 x 1.5	12	16	11.0	38.0
	ALND-M200	SLND-M200	M20 x 1.5	10	12	11.0	34.0
	ALND-M202	SLND-M202	M20 x 1.5	12	16	11.0	38.0
	ALND-M207	SLND-M207	M20 x 1.5	17	20	11.0	41.0
	ALND-M257	SLND-M257	M25 x 1.5	17	20	12.0	42.0
	ALND-M253	SLND-M253	M25 x 1.5	23	25	12.0	45.5
	ALND-M323	SLND-M323	M32 x 1.5	23	25	15.0	48.5
	ALND-M329	SLND-M329	M32 x 1.5	29	32	15.0	50.5
	ALND-M409	SLND-M409	M40 x 1.5	29	32	19.0	54.5
	ALND-M406	SLND-M406	M40 x 1.5	36	40	19.0	60.5
	ALND-M506	SLND-M506	M50 x 1.5	36	40	19.0	61.0
	ALND-M508	SLND-M508	M50 x 1.5	48	50	19.0	61.0
	ALND-M638	SLND-M638	M63 x 1.5	48	50	19.0	61.0

#### Type LAD - Connector 45° elbow, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	External Dimensions (mm)
				NW	Metric		
LAD, patent 	ALAD-M120	SLAD-M120	M12 x 1.5	10	12	11.0	42.5 x 33.0
	ALAD-M160	SLAD-M160	M16 x 1.5	10	12	11.0	42.5 x 35.0
	ALAD-M162	SLAD-M162	M16 x 1.5	12	16	11.0	47.5 x 39.5
	ALAD-M202	SLAD-M202	M20 x 1.5	12	16	11.0	47.5 x 41.5
	ALAD-M207	SLAD-M207	M20 x 1.5	17	20	11.0	54.0 x 46.0
	ALAD-M257	SLAD-M257	M25 x 1.5	17	20	12.0	55.0 x 48.5
	ALAD-M253	SLAD-M253	M25 x 1.5	23	25	12.0	63.5 x 55.5
	ALAD-M323	SLAD-M323	M32 x 1.5	23	25	15.0	67.0 x 60.0
	ALAD-M329	SLAD-M329	M32 x 1.5	29	32	15.0	72.5 x 63.5
	ALAD-M409	SLAD-M409	M40 x 1.5	29	32	19.0	76.5 x 66.5
	ALAD-M406	SLAD-M406	M40 x 1.5	36	40	19.0	87.5 x 78.0
	ALAD-M506	SLAD-M506	M50 x 1.5	36	40	19.0	88.0 x 82.0
	ALAD-M508	SLAD-M508	M50 x 1.5	48	50	19.0	97.5 x 88.0
	ALAD-M638	SLAD-M638	M63 x 1.5	48	50	19.0	97.5 x 94.5

## Connectors, metric and PG, polyamide thread

### Type LWD & LND

#### Type LWD - Connector 90° elbow, metric thread

	Order no. black, IP66	Order no. grey, IP66	Thread metric	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
	ALWD-M120	SLWD-M120	M12 x 1.5	10	12	11.0	33.0 x 36.5
	ALWD-M160	SLWD-M160	M16 x 1.5	10	12	11.0	33.0 x 38.5
	ALWD-M162	SLWD-M162	M16 x 1.5	12	16	11.0	37.5 x 43.0
	ALWD-M202	SLWD-M202	M20 x 1.5	12	16	11.0	37.5 x 45.0
	ALWD-M207	SLWD-M207	M20 x 1.5	17	20	11.0	42.0 x 50.5
	ALWD-M257	SLWD-M257	M25 x 1.5	17	20	12.0	43.0 x 53.0
	ALWD-M253	SLWD-M253	M25 x 1.5	23	25	12.0	52.5 x 59.0
	ALWD-M323	SLWD-M323	M32 x 1.5	23	25	15.0	56.0 x 62.5
	ALWD-M329	SLWD-M329	M32 x 1.5	29	32	15.0	62.5 x 69.0
	ALWD-M409	SLWD-M409	M40 x 1.5	29	32	19.0	66.5 x 72.0
	ALWD-M406	SLWD-M406	M40 x 1.5	36	40	19.0	76.0 x 83.0
	ALWD-M506	SLWD-M506	M50 x 1.5	36	40	19.0	76.0 x 87.0
	ALWD-M508	SLWD-M508	M50 x 1.5	48	50	19.0	89.0 x 92.5
	ALWD-M638	SLWD-M638	M63 x 1.5	48	50	19.0	89.0 x 99.0

#### Type LND - Connector straight, PG thread

	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	Overall length (mm)
				NW	Metric		
	ALND-P070*	SLND-P070*	07	10	12	7.0	44.0
	ALND-P090	SLND-P090	09	10	12	11.0	34.0
	ALND-P092*	SLND-P092*	09	12	16	8.0	50.0
	ALND-P110	SLND-P110	11	10	12	8.0	45.5
	ALND-P112	SLND-P112	11	12	16	11.0	38.0
	ALND-P132	SLND-P132	13.5	12	16	11.0	38.0
	ALND-P137	SLND-P137	13.5	17	20	11.0	41.0
	ALND-P167	SLND-P167	16	17	20	11.0	41.0
	ALND-P213	SLND-P213	21	23	25	12.0	45.5
	ALND-P299	SLND-P299	29	29	32	12.0	47.5
	ALND-P366	SLND-P366	36	36	40	13.0	54.5
	ALND-P488	SLND-P488	48	48	50	13.0	55.0

\*These products will be delivered with a thread adapter

## Connectors, PG, polyamide thread

### Type LAD & LWD conduits

#### Type LAD - Connector 45° elbow, PG thread

	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
LAD, patent 	ALAD-P090	SLAD-P090	09	10	12	11.0	42.5 x 34.0
	ALAD-P112	SLAD-P112	11	12	16	11.0	47.5 x 40.0
	ALAD-P132	SLAD-P132	13.5	12	16	11.0	47.5 x 41.5
	ALAD-P137	SLAD-P137	13.5	17	20	11.0	54.0 x 46.0
	ALAD-P167	SLAD-P167	16	17	20	11.0	54.0 x 47.0
	ALAD-P213	SLAD-P213	21	23	25	12.0	63.5 x 57.5
	ALAD-P299	SLAD-P299	29	29	32	12.0	69.5 x 65.0
	ALAD-P366	SLAD-P366	36	36	40	13.0	81.5 x 80.0
	ALAD-P488	SLAD-P488	48	48	50	13.0	91.5 x 93.0

#### Type LWD - Connector 90° elbow, PG thread

	Order no. black, IP66	Order no. grey, IP66	Thread PG	Fits to conduit size		Thread length (mm)	External dimensions (mm)
				NW	Metric		
LWD, patent 	ALWD-P070*	SLWD-P070*	07	10	12	7.0	42.0 x 37.5
	ALWD-P090	SLWD-P090	09	10	12	11.0	32.5 x 37.5
	ALWD-P092*	SLWD-P092*	09	12	16	8.0	48.0 x 43.5
	ALWD-P110*	SLWD-P110*	11	10	12	8.0	44.0 x 40.0
	ALWD-P112	SLWD-P112	11	12	16	11.0	36.5 x 43.5
	ALWD-P130*	SLWD-P130*	13.5	10	12	9.0	37.5 x 40.0
	ALWD-P132	SLWD-P132	13.5	12	16	11.0	36.5 x 45.0
	ALWD-P137	SLWD-P137	13.5	17	20	11.0	41.0 x 50.5
	ALWD-P167	SLWD-P167	16	17	20	11.0	41.0 x 51.5
	ALWD-P213	SLWD-P213	21	23	25	12.0	52.0 x 61.0
	ALWD-P299	SLWD-P299	29	29	32	12.0	58.5 x 70.5
	ALWD-P366	SLWD-P366	36	36	40	13.0	70.0 x 85.0
	ALWD-P488	SLWD-P488	48	48	50	13.0	83.0 x 97.5

\*These products will be delivered with a thread adapter

# PMAJACK Plastic and metal braids

## General technical details

Bundling and abrasion protection. Polyamide, polyester and steel braids – an alternative way to bundle and protect electrical cables.

Plastic braids manufactured from polyester and polyamide filaments – the other alternative solution for protecting and bundling cables.

This PMA cable protection system provides simple bundling and abrasion protection for cables and wires.

Various braid types to fulfill different requirements complimented by a range of braid terminations for simple and clean assembly.

### Material

- Braids made from polyamide 6.6 or polyester
- Terminations made from PA 6, aluminium or brass
- Free from halogens, REACH + RoHS compliant

### Characteristics

- Flammability of braids:
  - polyamide 6.6 UL 94 V2,
  - polyester UL 94 V0
- Braid design: Following DIN 65 164 part 1+2
- EN 45545-2 HL3





## Plastic braided hoses

### Type F.66 & C.66

#### Type F.66 - Braided hose

	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
	F.66.04SW	F.66.04GR	4	–	0.4	3.0	7.0
	F.66.06SW	F.66.06GR	6	SRER-06	0.6	5.0	8.0
	F.66.08SW	F.66.08GR	8	SRER-06	0.8	7.0	10.0
	F.66.10SW	F.66.10GR	10	SRER-06	1.0	9.0	13.0
	F.66.12SW	F.66.12GR	12	SRER-06	1.4	11.0	16.0
	F.66.16SW	F.66.16GR	16	SRER-16	1.7	15.0	21.0
	F.66.20SW	F.66.20GR	20	SRER-16	2.0	20.0	26.0
	F.66.25SW	F.66.25GR	25	SRER-21/SRER-29	2.4	24.0	31.0
	F.66.30SW	F.66.30GR	30	SRER-21/SRER-29	3.5	28.0	38.0
	F.66.40SW	F.66.40GR	40	SRER-29	4.2	38.0	49.0
	F.66.50SW	F.66.50GR	50	SREV-40/SRER-50	5.1	48.0	65.0
	F.66.70SW	F.66.70GR	70	SREV-40/SRER-50	4.9	48.0	85.0

#### Approvals



Monofile Ø: 0.28mm for increased abrasion properties  
 Coverage: > 90%  
 Polyamide 6.6  
 Specifications: DIN 5510 (S4/SR2/ST2), UL-File E 125 619, EN45545-2 HL3  
 Temperature range: -55°C to +135°C, short-term to +160°C

#### Type C.66 - Braided hose

	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
	C.66.10SW	C.66.10GR	10	SRER-06	0.7	8.0	14.0
	C.66.12SW	C.66.12GR	12	SRER-06/SRER-16	0.9	9.0	18.0
	C.66.16SW	C.66.16GR	16	SRER-06/SRER-16	1.2	11.0	22.0
	C.66.20SW	C.66.20GR	20	SRER-16/SRER-21	1.4	14.0	26.0
	C.66.25SW	C.66.25GR	25	SRER-16/SRER-21	1.4	18.0	28.0
	C.66.30SW	C.66.30GR	30	SRER-21/SRER-29	2.5	25.0	43.0
	C.66.40SW	C.66.40GR	40	SRER-29	2.5	30.0	52.0
	C.66.45SW	–	45	SREV-40/SRER-50	4.0	40.0	73.0

Monofile Ø: 0.28mm for increased abrasion properties  
 Coverage: > 75%  
 Polyamide 6.6  
 Specifications: DIN 5510 (S4/SR2/ST2), EN45545-2 HL3  
 Temperature range: -55°C to +135°C, short-term to +160°C

## Plastic braided hoses

### Type L.66 & F.PX

#### Type L.66 - Braided hose

	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
L.66	L.66.04SW	L.66.04GR	04	–	0.4	4.0	5.0
	L.66.08SW	L.66.08GR	08	SRER-06	0.5	5.0	10.0
	L.66.10SW	L.66.10GR	10	SRER-06	0.8	7.0	13.0
	L.66.16SW	L.66.16GR	16	SRER-16	0.9	11.0	20.0
	L.66.20SW	L.66.20GR	20	SRER-16	1.4	17.0	33.0
	L.66.25SW	L.66.25GR	25	SRER-21/SRER-29	1.5	21.0	34.0
	L.66.30SW	L.66.30GR	30	SRER-21/SRER-29	1.8	25.0	45.0
	L.66.40SW	L.66.40GR	40	SRER-29	1.9	31.0	55.0
	L.66.50SW	L.66.50GR	50	SREV-40/SRER-50	3.2	58.0	70.0

Monofile Ø: 0.25mm

Coverage: > 65%

Polyamide 6.6

Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I3/F2), EN45545-2 HL3

Temperature range: -55°C to +135°C, short-term to +160°C

#### Type F.PX - Braided hose

	Order no. grey	NW	Fits to termination	Weight nom. per 100 m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
F.PX	F.PX.04GR	04	–	0.3	3.0	7.0
	F.PX.06GR	06	SRER-06	0.5	5.0	8.0
	F.PX.08GR	08	SRER-06	0.7	7.0	10.0
	F.PX.10GR	10	SRER-06	0.8	9.0	13.0
	F.PX.12GR	12	SRER-06	1.1	11.0	16.0
	F.PX.16GR	16	SRER-16	1.3	15.0	21.0
	F.PX.20GR	20	SRER-16/SRER-21	1.5	20.0	26.0
	F.PX.25GR	25	SRER-16/SRER-21	2.0	24.0	31.0
	F.PX.30GR	30	SRER-21/SRER-29	2.9	28.0	38.0
	F.PX.40GR	40	SREV-40	3.1	38.0	49.0

Monofile Ø: 0.28mm for increased abrasion properties

Coverage: > 90%

Polyester

Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I3/F2), EN45545-2 HL3

Temperature range: -50°C to +120°C, short-term to +150°C

## Plastic braided hoses

Type L.PX, G.PX & B.PX

### Type L.PX - Braided hose

	Order no. black	Order no. grey	NW	Fits to termination	Weight nom. per 100m (kg)	Operative range min. Ø (mm)	Operative range max. Ø (mm)
L.PX	L.PX.04SW	L.PX.04GR	04	–	0.4	3.0	8.0
	L.PX.08SW	L.PX.08GR	08	SRER-06	0.5	5.0	10.0
	L.PX.10SW	L.PX.10GR	10	SRER-06	0.7	7.0	14.0
	L.PX.16SW	L.PX.16GR	16	SRER-16	0.8	11.0	20.0
	L.PX.20SW	L.PX.20GR	20	SRER-16	1.2	19.0	28.0
	L.PX.25SW	L.PX.25GR	25	SRER-21/SRER-29	1.4	21.0	34.0
	L.PX.30SW	L.PX.30GR	30	SRER-21/SRER-29	1.7	25.0	40.0
	L.PX.40SW	L.PX.40GR	40	SRER-29	1.7	31.0	55.0
	L.PX.50SW	L.PX.50GR	50	SREV-40/SRER-50	2.7	40.0	68.0

Monofile Ø: 0.22mm. Coverage: > 65%. Polyester

Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I1/F2), EN45545-2 HL3. Temperature range: -50°C to +120°C, short-term to +150°C

### Type G.PX - Braided hose

	Order no. black	NW	Packing unit PU/m	Weight nom. per 100m (kg)	Recommended range	
					min. Ø (mm)	max. Ø (mm)
G.PX	G.PX.05SW	05	25	1.6	4.5	5.5
	G.PX.08SW	08	25	2.0	7.0	9.0
	G.PX.10SW	10	25	2.3	9.0	11.0
	G.PX.13SW	13	25	2.5	11.5	13.0
	G.PX.16SW	16	25	3.4	14.5	17.5
	G.PX.19SW	19	25	3.8	17.0	21.0
	G.PX.25SW	25	25	4.8	22.5	27.5
	G.PX.29SW	29	25	5.3	26.0	32.0
	G.PX.32SW	32	25	6.1	29.0	35.0
	G.PX.38SW	38	25	8.3	34.0	42.0
	G.PX.50SW	50	25	8.7	45.0	55.0

Open, self winding construction. For retrofit installation. Overlapping: 90° (+40°/-25°). Polyester

Specifications: DIN 5510 (S4/SR2/ST2), NF F 16-101/102 (I3/F2), EN45545-2 HL3. Temperature range: -55°C to +150°C

### Type B.PX - Braided hose

	Order no. black	NW	Construction numb. x Ø mm	Packing unit PU/m	Weight nom. per 100m (kg)	Recommended range	
						min. Ø (mm)	max. Ø (mm)
B.PX	B.PX.12SW	12	96 x 0.20	100	0.5	6.0	18.0
	B.PX.15SW	15	144 x 0.20	100	0.7	10.0	28.0
	B.PX.30SW	30	192 x 0.20	100	0.9	20.0	42.0

Coverage: > 50%. Excellent abrasion properties. Lightweight structure. High flexibility. Excellent flame-retardant properties. Polyester

Specifications: EN 45545-2 HL3 (R22 & R23). UL94 V0. Temperature range: -50°C to +120°C continuous, +150°C short-term

## Braid terminations, connectors

### Type RER/REV

#### Type RER/REV - Braid termination

	Order no. grey	NW	AI (mm)	AA (mm)	BI (mm)	BA (mm)	H (mm)	L (mm)	G (mm)	S (mm)	C (mm)
	SRER-06 (x)	06	6.5	13	–	–	13	21	33	13	6
	SRER-16 (x)	16	16	24	–	–	15	25	39	15	7
	SRER-21 (x)	21	22	32	–	–	20	29	43	15	7
	SRER-29 (z)	29	30	40	–	–	18	29	43	39	7
	SRER-50 (z)	50	50	61	–	–	18	29	43	50	7
	SREV-40 (y)	40	47	58	34	44	20	24	44	38	10


For termination and fixation of plastic braided hoses

Suitable for: F.66, C.66, L.66, F.PX, L.PX braids


Polyamide 6

For exact braid and termination fitting configuration please refer to PMAJACK data sheets


**RER**  
x = with one mounting hole

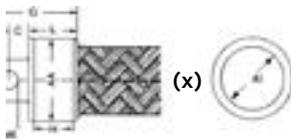

**REV**  
y = with two mounting holes

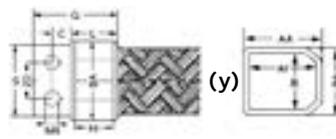

**RER**  
z = with three mounting holes

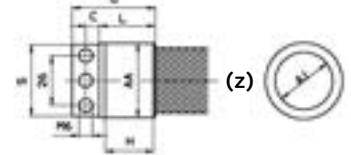

## Braid terminations, connectors


### Type BREIR & MREIR

#### Type BREIR - Connector for plastic braids, female thread

	Order no. black	NW	Thread size UNEF	Fits to PMAJACK			Ø ID (mm)	Ø D1 (mm)	B (mm)	G (mm)	g (mm)	H (mm)	Ø D2 (mm)
				F.66	C.66	L.66							
				F.PX	F.PX	L.PX							
BREIR	BREIR-U2916	16	1 <sup>3</sup> / <sub>16</sub> -18	12-20	12-25	16-25	36.2	20.5	10.5	36.5	9	15	25
	BREIR-U3516	16	1 <sup>7</sup> / <sub>16</sub> -18	12-20	12-25	16-25	42.5	20.5	11.5	37.5	9	15	25



For round connectors  
Suitable for: F.66, C.66, L.66, F.PX, L.PX braids  
Polyamide 6

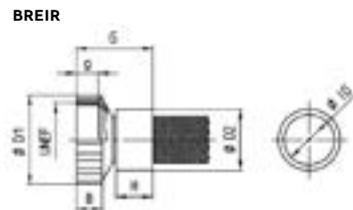


#### Type MREIR - Connector for plastic braids, female thread

	Order no. grey	NW	Thread size UNEF	Fits to PMAJACK			g (mm)	Ø D1 (mm)	Ø D2 (mm)	L (mm)	Ø ID (mm)
				F.66	C.66	F.PX					
				F.66	C.66	F.PX					
MREIR	MREIR-U3529	29	1 <sup>7</sup> / <sub>16</sub> -18	25-40	30+40	25-40	29	40.0	40.5	37.5	30.0



For round connectors  
Suitable for: F.66, C.66, L.66, F.PX, L.PX braids  
Black anodized aluminium

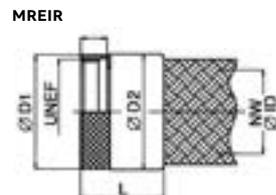

## Stainless steel braids, tools

### Type F.304, PMA-Tie-tool & HSG

#### Type F.304 - Stainless steel braided hose

	Order no.	Braid specification	Fits to conduit size NW	Operative range min. Ø (mm)	Operative range max. Ø (mm)
	F.304.10	24 x 7 x 0.3	10	10.0	18.0
	F.304.12	24 x 8 x 0.3	12	10.0	24.0
	F.304.17	24 x 12 x 0.3	17	15.0	28.0
	F.304.23	36 x 9 x 0.3	23	21.0	34.0
	F.304.29	36 x 11 x 0.3	29	25.0	40.0
	F.304.36	36 x 9 x 0.4	36	32.0	47.0
	F.304.48	48 x 10 x 0.4	48	55.0	80.0

Surface coverage: >90%  
Temperature range: -70°C to +1000°C

#### Type PMA-Tie-tool - Clamping tool for metal cable ties

	Order no.	For PMA-Tie-tool width (mm)
	PMA-Tie-tool	6.35

Handtool, self locking for speedy application  
Allows easy strapping of metal cable ties "Band-It"  
For long lasting fixation without deformation  
Stainless steel  
Colour: Black

#### Type HSG - Hot cutting tool

	Order no.	Order no. Spare cutting tape
	HSG-00	HSG-00-SB

For quick and easy cutting of plastic braidings  
Smallest hot cutting tool for permanent use  
With fixed edge (working area 30mm)  
Voltage: 230 V-50 Hz (115 V-60 Hz)  
Performance: 40W  
Length of the connecting lead: 2m

## Connectors, adapters


### Type VEMD

Type VEMD - Connector for overbraided conduits, metric/PG metal thread


	Order no. with jubilee clip	Thread metric	Fits to conduit size		Outside Ø x Length (mm)
			NW	Metric	
	MVEMD-M406/01	40 x 1.5	36	40	55.0 x 59.0
	MVEMD-M508/01	40 x 1.5	48	50	65.0 x 62.0
	MVEMD-M6356/01	63 x 1.5	56	68	80.0 x 72.0
<hr/>					
	Order no. with jubilee clip	Thread PG	Fits to conduit size		Outside Ø x Length (mm)
	MVEMD-P4856/01	48	NW	Metric	
			56	68	80.0 x 72.0

Nickel-plated aluminium  
IP66 up to IP68 on request

VEMD with metal cable tie "Band-It"

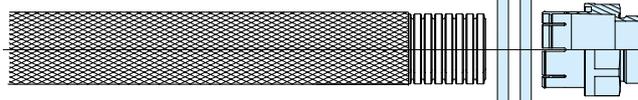

VEMD with jubilee clip

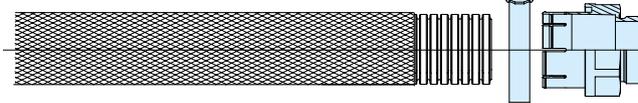

Content of delivery includes  
blue marked products.

## Connectors, adapters

### Type VEMD-RER


#### Type VEMD-RER - Adapter for overbraided conduits

	Order no. with Band-It*	Order no. with jubilee clip	Fits to conduit size		Width x Height x Length (mm)
			NW	Metric	
VEMD-RER	MVEMD-RER6	MVEMD-RER6/01	36	40	54.0 x 54.0 x 53.0
	MVEMD-RER8	—	48	50	66.0 x 66.0 x 53.0




\*Metal cable tie  
Nickel-plated aluminium  
IP66 on conduit side

VEMD-RER with metal cable tie "Band-It"

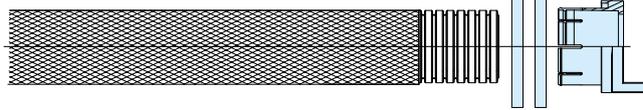

VEMD-RER with jubilee clip

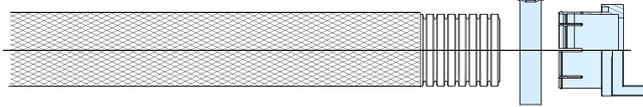

Content of delivery includes  
blue marked products.

# Technical annex

## Introduction

Conforms with standards. Intensive research and testing is the reason PMA continues to set new standards and trends in cable protection.

PMA products conform to worldwide standards and regulations.

As a pioneer in the field of cable protection, we have always given high priority to our own testing facilities, and we have consciously introduced stringent in-house standards. This approach has enabled PMA to exercise a significant influence on the development of international standards. Standards committees with responsibility for cable systems regularly ask our company to provide advice or participate as an active member.

### **High quality product from A–Z**

From basic items to high-tech products, all of our products meet the most stringent quality requirements.

Some of the outstanding are:

- Resistance to temperature, weathering, UV radiation and chemical agents
- High system pull-out resistance
- Excellent fire protection characteristics (flammability, smoke density and toxicity)
- Excellent system ingress protection up to IP68 and IP69
- Extremely long service life
- Conformance to all major international product standards

**Technical annex**


Testing methods according to IEC EN01386 and PMA internal procedures

PMA DO is a PMA in-house test

IEC EN 61386  
PMA DO 9.21-4425

**Resistance to fatigue when exposed to continuous bending**


Both standards describe tests designed to evaluate conduit resistance to fatigue when exposed to continuous cycles of repetitive bending. The test procedure involves bending back and forth around a central pivotal point. Although the test procedure is the same for both standards there are differences in the test parameters and the classification of results. For a “pliable” classification according to IEC EN 61386-22 a conduit must withstand 3 cycles at the minimum declared operating temperature. For a “flexible” classification according to IEC EN 61386-23 a conduit must withstand 5000 cycles at the minimum declared operating temperature. PMA DO 9.21-4425 tests the conduit at 23°C and 50% r.h. but the test is not limited to a fixed number of cycles. It continues until the first signs of damage occur in order to find the actual performance limit.

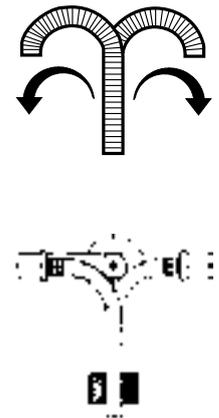

PMA DO 9.21-4420

**Resistance to fatigue when exposed to continuous bending**

This PMA internal standard describes a demanding test for conduit fatigue when exposed to continuous repetitive bending. The conduit is fixed at the top of the apparatus, it passes over and under two pulley wheels. A weight is suspended at the bottom end simulating the weight of cables within the conduit. The pulley wheels move up and down continuously bending the conduit twice through 180° over its entire length. The test is performed at 23°C and 50% r.h. and continues until the first signs of damage occur.

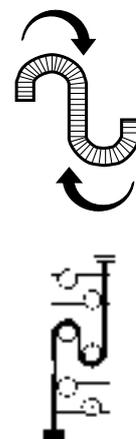

### Technical annex

Testing methods according to IEC EN01386 and PMA internal procedures

PMA DO is a PMA in-house test.

IEC EN 61386  
PMA DO 9.21-4320

#### Compression strength


Both standards describe a test designed to evaluate conduit resistance to compression forces. Excessive deformation of a conduit under compression could potentially cause damage to cables being protected within it. The force required to compress the conduit between two square plates to a specific % of its original diameter is measured. Relaxation over time and recovery after removal of the force are evaluated. The tests are performed at 23°C and 50% r.h. IEC EN 61386 uses two 50mm x 50mm plates and allows 25% deformation. PMA DO 9.21-4320 records results with 50mm x 50mm and 100mm x 100mm test plates and allows 20% deformation.



IEC EN 61386  
PMA DO 9.21-4610

#### System security – pull-out strength


Both standards are designed to test the security of the connection between conduit and fitting. Two fittings with a piece of conduit between them are pulled apart with steadily increasing force. Extension of the conduit is recorded graphically against the force applied. The force required to pull the conduit out of the fitting is determined. The tests are performed at 23°C and 50% r.h.

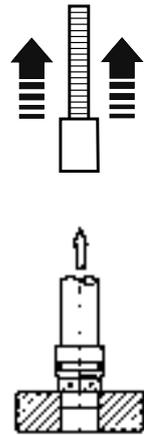

IEC EN 61386  
PMA DO 9.21-4330

#### Resistance to impact

These standards describe tests to evaluate the resistance of conduits to high energy impacts. They can be performed on conduits at various temperatures. Weights of different mass are dropped from an adjustable height directly onto a conduit sample which has been conditioned at the specified temperature. The energy of impact can be calculated as mass x gravity x height. The geometry of the object falling onto the conduit is regulated. No breaks, cracks or excessive permanent deformation should be visible after the test.

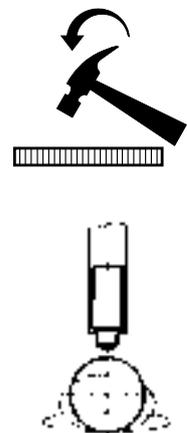

## Technical annex


### Testing methods according to IEC EN01386 and PMA internal procedures

PMA DO is a PMA in-house test.

#### PMA DO 9.21-4380

##### Flexibility at low temperature


This standard describes a test procedure to evaluate the flexibility of conduits at low temperatures. The conduit under test is placed in a climatic chamber at the lowest specified operating temperature for four hours. It is then removed and immediately bent around a mandrel of diameter related to the outside diameter (OD) of the conduit. Four classifications are achievable based upon the smallest achievable bending radius without damage.

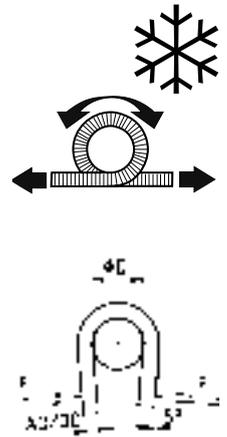

#### PMA DO 9.21-4360

##### Resistance to thermal ageing

This standard describes a procedure designed to evaluate the thermal stability of a conduit and its resistance to thermal ageing. The conduit is exposed to a temperature significantly above the maximum recommended continuous operating temperature for 168 hours, 160°C (PA6) or 150°C (PA12). The Flexibility at Low Temperature procedure DO 9.21-4380 is performed both before and after the thermal ageing procedure. The results are compared to detect any change in material characteristics.

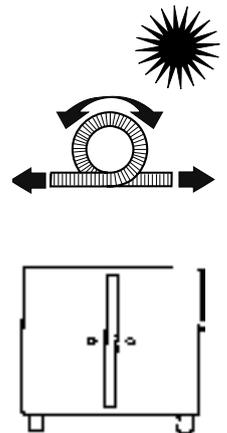


#### PMA DO 9.21-4430

#### IEC EN 61386

##### Flammability tests

PMA DO 9.21-4430 evaluates flammability characteristics using a defined flame from a standard burner. The time before ignition, fire propagation behaviour and extinguishing time after removal of the heat source are all factors in evaluating the flammability of conduits for a Self-Extinguishing Classification IEC 61386 uses the EN 60695-2-10 Glow wire test procedure to evaluate the flame Propagation behavior of conduits allocating the classifications. Non-flame propagating or flame propagating.

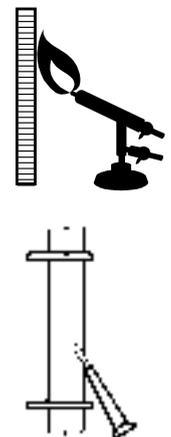

## Technical annex

### Ingress protections according to IEC 60529

Ingress protection (IP) according to IEC 60529

#### Ingress protection (IP)

A standard to classify product performance regarding ingress protection.

#### Different number – different protection!

For example, products classified as IPx8 are not automatically protected against jet water! Immersion tests for classifications IPx7 and IPx8 differ from the tests for protection against jet water for IPx6, IPx5, or IPx4.

**Therefore PMA cable protection systems are tested regarding different sealing requirements.**

#### PMA Products

			PMAFIX Pro	PMAFIX IP68+ WPS	PMAFIX IP68/ IP68GT	PMAFIX IP66	PMA Smart Line
	IPx4	Splash water from all directions	●	●	●	●	●
	IPx5	Jet water at any angle	●	●	●	●	●
	IPx6	Powerful jet water from any angle	●	●	●	●	●
	IPx7	Submersion (1m, 30 min.)	●	●	●	-	-
	IPx8	Submersion at time and pressure >IPx7	●	●	●	-	-
	IPx9	High pressure (up to 100 bar, 80°C) water from any angle	●	●*	●*	●*	●*

\*IEC 60529 can be fulfilled without WPS (Water impact protection ring). PMA recommends the use of the WPS ring for trouble free practical applications



PMA products offer complete protection!



Tested to 100 bar

## Technical annex

### Ingress protections according to IEC 60529

#### Dust


**Protection against contact and penetration of foreign objects**  
Degree of protection (contact/foreign bodies)

	<b>0</b>	No protection
	<b>1</b>	Objects greater than 50mm Ø, accidental touch by hands
	<b>2</b>	Objects greater than 12.5mm Ø, accidental touch by fingers
	<b>3</b>	Objects greater than 2.5mm Ø, e.g. tools/wires
	<b>4</b>	Objects greater than 1mm Ø, e.g. tools/wires
	<b>5</b>	Protected against dust - limited ingress (no harmful deposits)
	<b>6</b>	Totally protected against dust (dust-tight)

#### Water

**Protection against fluids**  
Degree of protection (water)

	<b>0</b>	No protection
	<b>1</b>	Protected against vertically falling drops of water
	<b>2</b>	Protected against direct sprays of water 15° from vertical
	<b>3</b>	Protected against sprays of water to 60° from vertical
	<b>4</b>	Protected against water sprayed from all directions - limited ingress permitted
	<b>5</b>	Protected against low pressure jets of water from all directions - limited ingress permitted
	<b>6</b>	Protected against strong pressure jets of water, heavy seas - limited ingress permitted
	<b>7</b>	Protection against the effects of immersion between 15cm - 1m
	<b>8</b>	Protection against long periods of immersion under a quoted pressure, e.g. 2 bar at 24 hours
	<b>9</b>	IP69 Automotive standard DIN40050 and signifies resistance to high pressure jets of water (up to 80 bar) from any angle

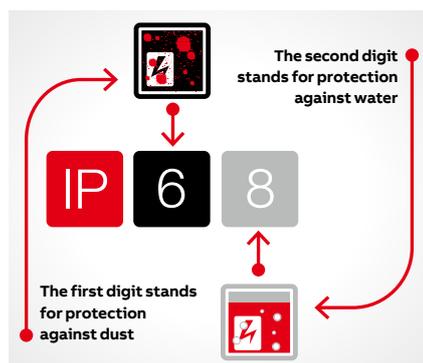


## Technical annex

### Table of thread dimensions


Metric fine thread - EN 60423

Metric	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole -0/+0.3 (mm)
12	1.5	12	10.16	12.0
16	1.5	16	14.16	16.0
20	1.5	20	18.16	20.0
25	1.5	25	23.16	25.0
32	1.5	32	30.16	32.0
40	1.5	40	38.16	40.0
50	1.5	50	48.16	50.0
63	1.5	63	61.16	63.0

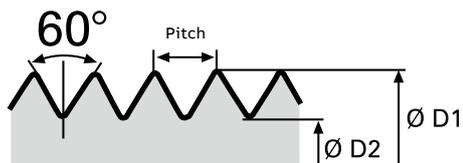


PG thread - DIN 40430

PG	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole (mm)
07	1.270	12.5	11.28	12.7
09	1.411	15.2	13.86	15.4
11	1.411	18.6	17.26	18.8
13	1.411	20.4	19.06	20.7
16	1.411	22.5	21.16	22.8
21	1.588	28.3	26.78	28.6
29	1.588	37.0	35.48	37.4
36	1.588	47.0	45.48	47.5
48	1.588	59.3	57.78	59.8

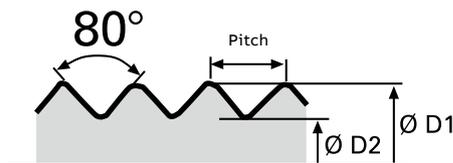


GAS pipe thread - DIN 259 Bl. 3, ISO 228/1

GAS	Pitch (mm)	Ø D1 (mm)	Ø D2 (mm)	Hole (mm)
¼"	1.337	13.157	11.445	13.4
⅜"	1.337	16.662	14.950	17.0
½"	1.814	20.955	18.631	21.3
¾"	1.814	26.441	24.117	26.8
1"	2.309	33.249	30.291	33.7
1¼"	2.309	41.910	38.952	42.4
1½"	2.309	47.803	44.845	48.3
2"	2.309	59.614	56.656	60.2

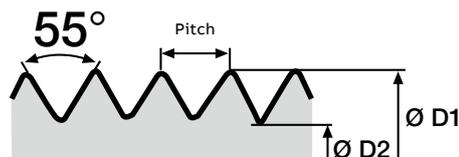

American standard taper pipe thread - ANSI/ASME B 1.20

NPT	Pitch (mm)	Ø D1 (mm)	Hole D2 (mm)
¼"	1.411	13.716	13.9
⅜"	1.411	17.145	17.4
½"	1.814	21.336	21.6
¾"	1.814	26.670	26.9
1"	2.209	33.401	33.7
1¼"	2.209	42.164	42.4
1½"	2.209	48.260	48.5
2"	2.209	60.325	60.6

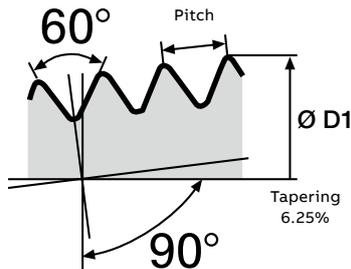

## Technical annex

### Comparison table

#### Conduit

Nominal width NW		Inside Ø nom. (mm)
Standard	Metric	
07	10	6.2
10	12	9.6
10	12	9.6
12	16	12.0
12	16	12.0
17	20	16.2
17	20	16.2
23	25	22.6
23	25	22.6
29	32	29.0
29	32	29.0
36	40	36.5
36	40	36.5
48	50	47.5
48	50	47.5

#### Connector metric


Thread size	Inside diameter mm (nom.) ID	
	Metal thread	Polyamide thread
M12	–	8.0
M12	5.7	8.0
M16	9.6	11.0
M16	9.7	11.0
M20	13.5	13.0
M20	13.5	14.6
M25	18.3	19.0
M25	18.4	19.0
M32	24.2	24.0
M32	25.4	26.0
M40	31.4	32.0
M40	32.6	32.0
M50	39.5	39.0
M50	41.5	42.0
M63	51.4	53.0

#### Conduit

Nominal width NW		Inside Ø nom. (mm)
Standard	Metric	
07	10	6.2
10	12	9.6
12	16	12.0
–	–	–
17	20	16.2
23	25	22.6
29	32	29.0
36	40	36.5
–	–	–
48	50	47.5

#### Connector PG

Thread size	Inside diameter mm (nom.) ID	
	Metal thread	Polyamide thread
PG07	–	8.0
PG09	9.5	10.0
PG11	12.5	13.0
PG13.5	14.5	14.5
PG16	16.5	17.5
PG21	22.0	22.5
PG29	30.0	30.5
PG36	40.0	37.5
PG42	–	46.0
PG48	49.5	50.0

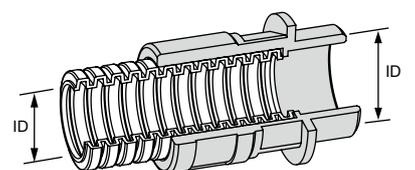

Inside diameter threads to inside diameter conduits.

## Technical annex

### Tightening torques

#### Recommended tightening torques for PMA fittings - For threaded bore holes and with lock nuts

Thread	Metal* [Nm]	Polyamide** [Nm]
M12	4.0	1.5
M16	4.0	3.0
M20	6.0	4.0
M25	8.0	6.0
M32	10.0	8.0
M40	15.0	9.0
M50	15.0	10.0
M63	15.0	10.0

\* Thread combination: Metal + metal

\*\* Thread combination: Metal + polyamide or polyamide + polyamide

Thread	Metal* [Nm]	Polyamide [Nm]
PG07	3.5	1.5
PG09	4.0	1.5
PG11	6.0	2.0
PG13.5	6.0	2.5
PG16	7.0	4.0
PG21	8.0	5.0
PG29	10.0	9.0
PG36	15.0	15.0
PG48	15.0	15.0

#### Strain relief fittings - According to EN 50262

Thread	Metal NVNZ-Mxxxx NKNZ-Mxxxx	Metal NVNZ-Mxxxx/P NKNZ-Mxxxx/P	Polyamide S/BVNZ-Mxxxx [Nm] EN
	[Nm] EN	[Nm]	
M12	5.0	6.0	0.9
M16	5.0	8.0	3.0
M20	7.5	10.0	4.0
M25	10.0	10.0	7.5
M32	15.0	15.0	10.0
M40	20.0	20.0	10.0
M50	20.0	20.0	10.0
M63	20.0	20.0	10.0

**Note:** These values were gauged at standard climate (23°C/50% relative humidity)

#### According to DIN VDE 0619

Thread	Metal NVNZ-Pxxxx	Metal NVNZ-Pxxxx/P	Polyamide S/BVNZ-Pxxxx [Nm]
	[Nm]	[Nm]	
PG07	6.25	6.0	2.5
PG09	6.25	8.0	3.75
PG11	6.25	10.0	3.75
PG13.5	6.25	10.0	3.75
PG16	7.5	10.0	5.0
PG21	10.0	15.0	7.5
PG29	10.0	20.0	7.5
PG36	10.0	30.0	7.5
PG48	10.0	40.0	7.5

## Technical annex

### Applications engineering information

#### Fill factor, relevant guidelines

The question of conduit capacity or fill factor arises in the use of cable protection systems. This describes the extent to which a conduit can or should be filled with cables and/or conductors based on the available cross-sectional area.

In all cases, PMA recommends that a conduit **capacity of 70%** not be exceeded. (Application-specific procedures and standards must also be considered.)

This ensures that operation is not unnecessarily impaired by increased friction between the individual conductors in dynamically moving systems. In addition, subsequent installation of additional conductors and/or cables is also possible if necessary.

#### Wiring installation: fixation


PMA AG recommends that cable protection systems be fastened with a spacing of **300mm to 500mm** between supports. This spacing can be varied depending on the application and location. This recommendation applies for all available dimensions. For larger diameters, the increased load due to the cables and conductors in the conduit is accounted for by adherence to the support spacing. PMA supplies suitable system supports for various strength requirements and applications.

European standard **EN 50343:2003-5.15** "Railway applications – Rolling stock – Rules for installation of cabling" specifies the following spacing between supports for fastening conductors:

**Horizontal wiring: 300mm**

**Vertical wiring: 500mm**

(Application specific guidelines and standards should also be considered.)

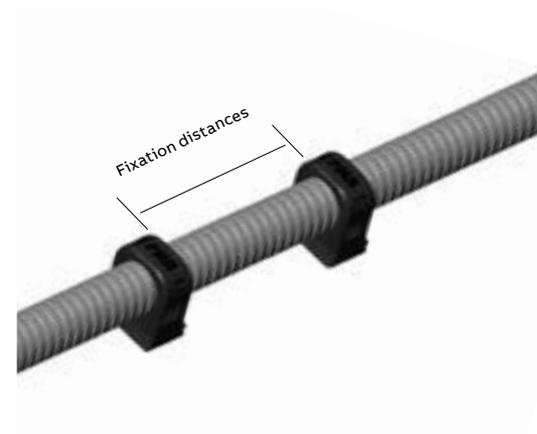

## Technical annex

### Chemical resistance

Chemical resistance comparison table

Resistance against	Chemical formula	PA6, Polyamide 6 PA6.6, Polyamide 6.6	PA12, Polyamide 12 PA11, Polyamide 11	PP, Polypropylene PE, Polyethylene	TPU	PFA PVDF
Acetic acid (10%)	C2H4O2	1	2	3	0	3
Acetone	C3H6O	3	3	3	0	3
Ammonia (30%)	NH3	3	3	3	0	3
Benzine	–	3	3	2	1	3
Brake fluid	–	3	3	3	0	3
Caustic soda	NaOH	3	3	3	1	3
Ethyl alcohol (40%)	C2H6O	3	3	3	1	3
Glycol	C2H6O2	3	3	3	0	3
Hydrochloric acid (10%)	HCL	0	1	3	0	3
Methanol	CH4O	2	3	3	1	3
Methyl ethyl ketone	C4H8O	3	3	3	0	3
Nitric acid (10%)	HNO3	0	0	2	0	3
Ozone	O3	2	2	2	1	3
Paint thinner	–	3	3	1	0	3
Perchloroethylene	C2Cl4	2	2	2	0	3
Paraffin	–	3	3	1	0	3
Phosphoric acid (10%)	H3O4P	1	2	3	0	3
Sea water	–	3	3	3	2	3
Soap solution	–	3	3	3	2	3
Sodium chloride	NaCl	3	3	3	3	3
Sulphuric acid (10%)	H2SO4	1	2	3	0	3
Toluene	C7H8	3	3	1	0	3
Trichlorethylene	C2HCl3	1	2	0	0	3
Turpentine	–	3	3	0	0	3
Urine	–	3	3	3	3	3

Resistance against oils and greases	Chemical formula	PA6, Polyamide 6 PA6.6, Polyamide 6.6	PA12, Polyamide 12 PA11, Polyamide 11	PP, Polypropylene PE, Polyethylene	TPU	PFA PVDF
Cutting oils*	–	3	3	2	1	3
Diesel oil	–	3	3	2	2	3
ASTM Oil Nr. 3	–	3	3	2	1	3
Fuel oil	–	3	3	2	1	3
Hydraulic oils*	–	3	3	2	1	3
Mineral oils	–	3	3	2	3	3
Spark-erosion liquids	–	3	3	2	1	3
Skydrol	–	1	2	2	0	3
Transformer oils*	–	3	3	2	1	3

\*Synthetic additives can affect the oil resistance of plastics. Please contact PMA for further information

**Key:**

3 = Excellent resistance/suitable for permanent contact

2 = Resistant/suitable for occasional contact

1 = Relatively resistant/suitable for short-term contact

0 = Not recommended

**Important**

The chemical resistance of plastic products is also dependant on factors such as temperature, amount of time exposed to chemicals (e.g. occasional contact or immersed) as well as the concentration of the specific chemicals. The stated chemical resistances are valid for a temperature of 20°C. The chemical resistance table above serves only as a guide for the use of polyamide products in conjunction with the listed chemicals. Each specific application should be controlled for suitability by the end-user.

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
0709M	7TAA292550R0000	106	514-36	7TAA292690R0007	107	ALND-M406	7TAA292000R0033	139
0907M	7TAA292550R0001	106	514-48	7TAA292690R0008	107	ALND-M409	7TAA292000R0034	139
0911M	7TAA292550R0002	106	514-M12	7TAA292690R0009	107	ALND-M506	7TAA292000R0035	139
0913M	7TAA292550R0003	106	514-M16	7TAA292690R0010	107	ALND-M508	7TAA292000R0036	139
1107M	7TAA292550R0004	106	514-M20	7TAA292690R0011	107	ALND-M638	7TAA292000R0037	139
1109M	7TAA292550R0005	106	514-M25	7TAA292690R0012	107	ALND-P070	7TAA292000R0038	140
1109N	7TAA292550R0006	105	514-M32	7TAA292690R0013	107	ALND-P090	7TAA292000R0039	140
1113M	7TAA292550R0007	106	514-M40	7TAA292690R0014	107	ALND-P092	7TAA292000R0040	140
1116M	7TAA292550R0008	106	514-M50	7TAA292690R0015	107	ALND-P110	7TAA292000R0041	140
1121M	7TAA292550R0009	106	514-M63	7TAA292690R0016	107	ALND-P112	7TAA292000R0042	140
1307M	7TAA292550R0010	106	AFN2-07GT	7TAA292700R0000	103	ALND-P132	7TAA292000R0043	140
1309M	7TAA292550R0011	106	AFN2-10GT	7TAA292700R0001	103	ALND-P137	7TAA292000R0044	140
1309N	7TAA292550R0012	105	AFN2-12GT	7TAA292700R0002	103	ALND-P167	7TAA292000R0045	140
1311M	7TAA292550R0013	106	AFN2-17GT	7TAA292700R0003	103	ALND-P213	7TAA292000R0046	140
1311N	7TAA292550R0014	105	AFN2-23GT	7TAA292700R0004	103	ALND-P299	7TAA292000R0047	140
1316M	7TAA292550R0015	106	AFN2-29GT	7TAA292700R0005	103	ALND-P366	7TAA292000R0048	140
1321M	7TAA292550R0016	106	AFN2-36GT	7TAA292700R0006	103	ALND-P488	7TAA292000R0049	140
1607M	7TAA292550R0017	106	AFN2-48GT	7TAA292700R0007	103	ALWD-M120	7TAA292000R0050	140
1609M	7TAA292550R0018	106	ALAD-M120	7TAA292000R0000	139	ALWD-M160	7TAA292000R0051	140
1609N	7TAA292550R0019	105	ALAD-M160	7TAA292000R0001	139	ALWD-M162	7TAA292000R0052	140
1611M	7TAA292550R0020	106	ALAD-M162	7TAA292000R0002	139	ALWD-M202	7TAA292000R0053	140
1611N	7TAA292550R0021	105	ALAD-M202	7TAA292000R0003	139	ALWD-M207	7TAA292000R0054	140
1613M	7TAA292550R0022	106	ALAD-M207	7TAA292000R0004	139	ALWD-M253	7TAA292000R0055	140
1613N	7TAA292550R0023	105	ALAD-M253	7TAA292000R0005	139	ALWD-M257	7TAA292000R0056	140
1621M	7TAA292550R0024	106	ALAD-M257	7TAA292000R0006	139	ALWD-M323	7TAA292000R0057	140
1629M	7TAA292550R0025	106	ALAD-M323	7TAA292000R0007	139	ALWD-M329	7TAA292000R0058	140
2111M	7TAA292550R0026	106	ALAD-M329	7TAA292000R0008	139	ALWD-M406	7TAA292000R0059	140
2113M	7TAA292550R0027	106	ALAD-M406	7TAA292000R0009	139	ALWD-M409	7TAA292000R0060	140
2113N	7TAA292550R0028	105	ALAD-M409	7TAA292000R0010	139	ALWD-M506	7TAA292000R0061	140
2116M	7TAA292550R0029	106	ALAD-M506	7TAA292000R0011	139	ALWD-M508	7TAA292000R0062	140
2116N	7TAA292550R0030	105	ALAD-M508	7TAA292000R0012	139	ALWD-M638	7TAA292000R0063	140
2129M	7TAA292550R0031	106	ALAD-M638	7TAA292000R0013	139	ALWD-P070	7TAA292000R0064	141
2916M	7TAA292550R0032	106	ALAD-P090	7TAA292000R0014	141	ALWD-P090	7TAA292000R0065	141
2921M	7TAA292550R0033	106	ALAD-P112	7TAA292000R0015	141	ALWD-P092	7TAA292000R0066	141
2921N	7TAA292550R0034	105	ALAD-P132	7TAA292000R0016	141	ALWD-P110	7TAA292000R0067	141
2936M	7TAA292550R0035	106	ALAD-P137	7TAA292000R0017	141	ALWD-P112	7TAA292000R0068	141
3621M	7TAA292550R0036	106	ALAD-P167	7TAA292000R0018	141	ALWD-P130	7TAA292000R0069	141
3629M	7TAA292550R0037	106	ALAD-P213	7TAA292000R0019	141	ALWD-P132	7TAA292000R0070	141
3629N	7TAA292550R0038	105	ALAD-P299	7TAA292000R0020	141	ALWD-P137	7TAA292000R0071	141
4229M	7TAA292550R0039	106	ALAD-P366	7TAA292000R0021	141	ALWD-P167	7TAA292000R0072	141
4236M	7TAA292550R0040	106	ALAD-P488	7TAA292000R0022	141	ALWD-P213	7TAA292000R0073	141
4248M	7TAA292550R0041	106	ALND-M120	7TAA292000R0023	139	ALWD-P299	7TAA292000R0074	141
4836M	7TAA292550R0042	106	ALND-M160	7TAA292000R0024	139	ALWD-P366	7TAA292000R0075	141
4842M	7TAA292550R0043	106	ALND-M162	7TAA292000R0025	139	ALWD-P488	7TAA292000R0076	141
514-07	7TAA292690R0000	107	ALND-M200	7TAA292000R0026	139	B.PX.12SW		146
514-09	7TAA292690R0001	107	ALND-M202	7TAA292000R0027	139	B.PX.15SW		146
514-11	7TAA292690R0002	107	ALND-M207	7TAA292000R0028	139	B.PX.30SW		146
514-13	7TAA292690R0003	107	ALND-M253	7TAA292000R0029	139	BAVD-12/10GT	7TAA292580R0000	89
514-16	7TAA292690R0004	107	ALND-M257	7TAA292000R0030	139	BAVD-17/10GT	7TAA292580R0001	89
514-21	7TAA292690R0005	107	ALND-M323	7TAA292000R0031	139	BAVD-17/12GT	7TAA292580R0002	89
514-29	7TAA292690R0006	107	ALND-M329	7TAA292000R0032	139	BAVD-23/10GT	7TAA292580R0003	89

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BAVD-23/12GT	7TAA292580R0004	89	BFIL-P366	7TAA292610R0014	85	BGP-56G	7TAA292860R0026	114
BAVD-23/17GT	7TAA292580R0005	89	BFIL-P369	7TCA292000R0602	85	BGPS-12/01	7TCA292000R5539	114
BAVD-29/10GT	7TAA292580R0006	89	BFIL-P488	7TAA292610R0015	85	BGPS-17	7TAA292860R0027	114
BAVD-29/12GT	7TAA292580R0007	89	BGG-125	7TAA292860R0000	123	BGPS-23	7TAA292860R0028	114
BAVD-29/17GT	7TAA292580R0008	89	BGG-56	7TAA292860R0001	123	BGPS-29	7TAA292860R0029	114
BAVD-29/23GT	7TAA292580R0009	89	BGG-70	7TAA292860R0002	123	BGPS-36	7TAA292860R0030	114
BAVD-36/29GT	7TAA292580R0010	89	BGG-95	7TAA292860R0003	123	BGPS-48	7TAA292860R0031	114
BAVD-48/36GT	7TAA292580R0011	89	BGG-M6356	7TAA292860R0004	125	BGPS-56	7TAA292860R0032	114
BAVR-10/07	7TAA292580R0013	89	BGG-P3656	7TAA292860R0005	125	BKIHG-U212	7TAA292400R0028	47
BAVR-12/10	7TAA292580R0014	89	BGGV-56	7TAA292860R0006	124	BKIHG-U217	7TAA292400R0029	47
BAVR-17/10	7TAA292580R0015	89	BGGV-70	7TAA292860R0007	124	BKIHG-U242	7TAA292400R0030	47
BAVR-17/12	7TAA292580R0016	89	BGGV-95	7TAA292860R0008	124	BKIHG-U243	7TAA292400R0031	47
BAVR-23/10	7TAA292580R0017	89	BGH-23	7TAA292720R0014	112	BKIHG-U247	7TAA292400R0032	47
BAVR-23/12	7TAA292580R0018	89	BGH-29	7TAA292720R0015	112	BKIHG-U292	7TAA292400R0033	47
BAVR-23/17	7TAA292580R0019	89	BGH-36	7TAA292720R0016	112	BKIHG-U293	7TAA292400R0034	47
BAVR-29/10	7TAA292580R0020	89	BGH-48	7TAA292720R0017	112	BKIHG-U297	7TAA292400R0035	47
BAVR-29/12	7TAA292580R0021	89	BGH-56	7TAA292720R0018	112,126	BKIHG-U299	7TAA292400R0036	47
BAVR-29/17	7TAA292580R0022	89	BGH-70	7TAA292720R0019	112,126	BKIHG-U353	7TAA292400R0037	47
BAVR-29/23	7TAA292580R0023	89	BGH-95	7TAA292720R0020	112,126	BKIHG-U357	7TAA292400R0038	47
BAVR-36/29	7TAA292580R0024	89	BGI-M7556	7TAA292860R0009	125	BKIHG-U359	7TAA292400R0039	47
BAVR-48/36	7TAA292580R0025	89	BGL-07	7TAA292720R0021	112	BKIHG-U433	7TAA292400R0040	47
BCT-10	7TAA292860R0045	115	BGL-10	7TAA292720R0022	112	BKIHG-U439	7TAA292400R0041	47
BCT-12	7TAA292860R0046	115	BGL-12	7TAA292720R0023	112	BKIHG-U503	7TAA292400R0042	47
BCT-17	7TAA292860R0047	115	BGL-17	7TAA292720R0024	112	BKIHG-U506	7TAA292400R0043	47
BCT-23	7TAA292860R0048	115	BGL-23	7TAA292720R0025	112	BKIHG-U508	7TAA292400R0044	47
BCT-29	7TAA292860R0049	115	BGL-29	7TAA292720R0026	112	BKIHG-U509	7TAA292400R0045	47
BCT-36	7TAA292860R0050	115	BGN-S12T	7TAA292680R0000	110	BKIHG-U566	7TAA292400R0046	47
BFH-07-0	7TAA292700R0009	111	BGN-S17G	7TAA292680R0001	110	BKIHG-U568	7TAA292400R0047	47
BFH-10-0	7TAA292700R0011	111	BGN-S17T	7TAA292680R0002	110	BLN-M16	7TAA292740R0000	131
BFH-12-0	7TAA292700R0012	111	BGN-S23G	7TAA292680R0003	110	BLN-M20	7TAA292740R0001	131
BFH-17-0	7TAA292700R0013	111	BGN-S23T	7TAA292680R0004	110	BLN-M25	7TAA292740R0002	131
BFH-23-0	7TAA292700R0015	111	BGN-S29G	7TAA292680R0005	110	BLN-M32	7TAA292740R0003	131
BFH-29-0	7TAA292700R0017	111	BGN-S29T	7TAA292680R0006	110	BLN-M40	7TAA292740R0004	131
BFH-36-0	7TAA292700R0018	111	BGN-S36G	7TAA292680R0007	110	BLN-M50	7TAA292740R0005	131
BFH-48-0	7TAA292700R0020	111	BGN-S36T	7TAA292680R0008	110	BLNO-M160	7TAA292740R0006	131
BFHS-00	7TAA292700R0022	111	BGN-S48G	7TAA292680R0009	110	BLNO-M162	7TAA292740R0007	131
BFHS-PH	7TAA292700R0024	111	BGN-S48T	7TAA292680R0010	110	BLNO-M202	7TAA292740R0008	131
BFHS-PH1	7TAA292700R0025	111	BGN-S70G	7TAA292680R0011	110	BLNO-M207	7TAA292740R0009	131
BFIL-P070	7TAA292610R0003	85	BGO-56	7TAA292860R0010	123	BLNO-M253	7TAA292740R0010	131
BFIL-P07M	7TAA292610R0004	85	BGO-70	7TAA292860R0011	123	BLNO-M257	7TAA292740R0011	131
BFIL-P090	7TAA292610R0005	85	BGO-95	7TAA292860R0012	123	BLNO-M323	7TAA292740R0012	131
BFIL-P112	7TAA292610R0006	85	BGOV-56	7TAA292860R0013	124	BLNO-M329	7TAA292740R0013	131
BFIL-P117	7TAA292610R0007	85	BGOV-70	7TAA292860R0014	124	BLNO-M406	7TAA292740R0014	131
BFIL-P132	7TAA292610R0008	85	BGOV-95	7TAA292860R0015	124	BLNO-M409	7TAA292740R0015	131
BFIL-P137	7TAA292610R0009	85	BGP-12/01	7TCA292000R6631	114	BLNO-M508	7TAA292740R0016	131
BFIL-P160	7TCA292000R0600	85	BGP-17	7TCA292000R6632	114	BLSGO-101010	7TCA292000R9460	133
BFIL-P167	7TAA292610R0010	85	BGP-23	7TCA292000R6633	114	BLSGO-121212	7TCA292000R9461	133
BFIL-P213	7TAA292610R0011	85	BGP-29	7TCA292000R6634	114	BLSGO-171717	7TCA292000R9462	133
BFIL-P217	7TAA292610R0012	85	BGP-3x48	7TCA292000R8706	114	BLSGO-232323	7TCA292000R9463	133
BFIL-P293	7TCA292000R0601	85	BGP-36	7TCA292000R6635	114	BLTO-070707	7TCA292000R4700	132
BFIL-P299	7TAA292610R0013	85	BGP-48	7TCA292000R6636	114	BLTO-101010	7TCA292000R4701	132

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BLTO-121212	7TCA292000R4702	132	BVAD-N088GT	7TAA292150R0048	78	BVBV-M207	7TAA292150R0106	59
BLTO-171717	7TCA292000R4703	132	BVAD-P090GT	7TAA292150R0049	70	BVBV-M253	7TAA292150R0107	59
BLTO-232323	7TCA292000R4704	132	BVAD-P112GT	7TAA292150R0050	70	BVBV-M257	7TAA292150R0108	59
BLTO-292929	7TCA292000R4705	132	BVAD-P132GT	7TAA292150R0051	70	BVBV-M323	7TAA292150R0109	59
BLYO-100707	7TCA292000R4706	132	BVAD-P137GT	7TAA292150R0052	70	BVBV-M329	7TAA292150R0110	59
BLYO-121010	7TCA292000R4707	132	BVAD-P167GT	7TAA292150R0053	70	BVBV-M406	7TAA292150R0111	59
BLYO-171212	7TCA292000R4708	132	BVAD-P213GT	7TAA292150R0054	70	BVBV-M409	7TAA292150R0112	59
BLYO-231717	7TCA292000R4709	132	BVAD-P299GT	7TAA292150R0055	70	BVBV-M506	7TAA292150R0113	59
BLYO-292917	7TCA292000R4710	132	BVAD-P366GT	7TAA292150R0056	70	BVBV-M508	7TAA292150R0114	59
BMN-07	7TAA292670R0008	108	BVAD-P488GT	7TAA292150R0057	70	BVBV-M638	7TAA292150R0115	59
BMN-09	7TAA292670R0009	108	BVAV-M160	7TAA292150R0065	58	BVBV-P167	7TAA292150R0116	71
BMN-11	7TAA292670R0010	108	BVAV-M162	7TAA292150R0066	58	BVBV-P213	7TAA292150R0117	71
BMN-13	7TAA292670R0011	108	BVAV-M202	7TAA292150R0067	58	BVBV-P299	7TAA292150R0118	71
BMN-16	7TAA292670R0012	108	BVAV-M207	7TAA292150R0068	58	BVBV-P366	7TAA292150R0119	71
BMN-21	7TAA292670R0013	108	BVAV-M253	7TAA292150R0069	58	BVBV-P488	7TAA292150R0120	71
BMN-29	7TAA292670R0014	108	BVAV-M329	7TAA292150R0070	58	BVH-17-000	7TAA292700R0027	110
BMN-36	7TAA292670R0015	108	BVAV-M406	7TAA292150R0071	58	BVH-17-010	7TAA292700R0028	110
BMN-48	7TAA292670R0016	108	BVAV-M506	7TAA292150R0072	58	BVH-17-020	7TAA292700R0029	110
BMN-M12	7TAA292670R0020	108	BVAV-M508	7TAA292150R0073	58	BVH-23-000	7TAA292700R0030	110
BMN-M16	7TAA292670R0021	108	BVAV-M638	7TAA292150R0074	58	BVH-23-010	7TAA292700R0031	110
BMN-M20	7TAA292670R0022	108	BVAV-N022	7TAA292150R0075	78	BVH-23-020	7TAA292700R0032	110
BMN-M25	7TAA292670R0023	108	BVAV-N027	7TAA292150R0076	78	BVH-29-000	7TAA292700R0033	110
BMN-M32	7TAA292670R0024	108	BVAV-N043	7TAA292150R0077	78	BVH-29-010	7TAA292700R0034	110
BMN-M40	7TAA292670R0025	108	BVAV-N069	7TAA292150R0078	78	BVH-29-020	7TAA292700R0035	110
BMN-M50	7TAA292670R0026	108	BVAV-N076	7TAA292150R0079	78	BVH-36-000	7TAA292700R0036	110
BMN-M63	7TAA292670R0027	108	BVAV-N088	7TAA292150R0080	78	BVH-36-010	7TAA292700R0037	110
BREIR-U2916	7TAA292920R0007	148	BVAV-N098	7TAA292150R0081	78	BVH-36-020	7TAA292700R0038	110
BREIR-U3516	7TCA292000R0853	148	BVAV-P090	7TAA292150R0082	70	BVH-48-000	7TAA292700R0039	110
BSS-17	7TAA292850R0013	116	BVAV-P112	7TAA292150R0083	70	BVH-48-010	7TAA292700R0040	110
BSS-23	7TAA292850R0014	116	BVAV-P132	7TAA292150R0084	70	BVH-48-020	7TAA292700R0041	110
BSS-29	7TAA292850R0015	116	BVAV-P137	7TAA292150R0085	70	BVIDA-U150GT	7TAA292610R0025	86
BSS-36	7TAA292850R0016	116	BVAV-P167	7TAA292150R0086	70	BVIDA-U152GT	7TAA292610R0026	86
BSS-48	7TAA292850R0017	116	BVAV-P213	7TAA292150R0087	70	BVIDA-U15MG	7TAA292610R0027	86
BSS-56G	7TAA292850R0018	116	BVAV-P299	7TAA292150R0088	70	BVIDA-U180GT	7TAA292610R0028	86
BSV-70G	7TAA292850R0019	116	BVAV-P366	7TAA292150R0089	70	BVIDA-U182GT	7TAA292610R0029	86
BVAD-M120GT	7TAA292150R0032	58	BVAV-P488	7TAA292150R0090	70	BVIDA-U187GT	7TAA292610R0030	86
BVAD-M160GT	7TAA292150R0033	58	BVBD-M207GT	7TAA292150R0091	59	BVIDA-U232GT	7TAA292610R0031	86
BVAD-M162GT	7TAA292150R0034	58	BVBD-M253GT	7TAA292150R0092	59	BVIDA-U233GT	7TAA292610R0032	86
BVAD-M202GT	7TAA292150R0035	58	BVBD-M257GT	7TAA292150R0093	59	BVIDA-U237GT	7TAA292610R0033	86
BVAD-M207GT	7TAA292150R0036	58	BVBD-M323GT	7TAA292150R0094	59	BVIDA-U343GT	7TAA292610R0034	86
BVAD-M253GT	7TAA292150R0037	58	BVBD-M329GT	7TAA292150R0095	59	BVIDA-U347GT	7TAA292610R0035	86
BVAD-M329GT	7TAA292150R0038	58	BVBD-M406GT	7TAA292150R0096	59	BVIDA-U402GT	7TAA292610R0036	86
BVAD-M406GT	7TAA292150R0039	58	BVBD-M409GT	7TAA292150R0097	59	BVIDA-U403GT	7TAA292610R0037	86
BVAD-M506GT	7TAA292150R0040	58	BVBD-M506GT	7TAA292150R0098	59	BVIDA-U407GT	7TAA292610R0038	86
BVAD-M508GT	7TAA292150R0041	58	BVBD-M508GT	7TAA292150R0099	59	BVIDB-U162GT	7TAA292610R0039	86
BVAD-M638GT	7TAA292150R0042	58	BVBD-M638GT	7TAA292150R0100	59	BVIDB-U202GT	7TAA292610R0040	86
BVAD-N022GT	7TAA292150R0043	78	BVBD-P167GT	7TAA292150R0101	71	BVIDB-U232GT	7TAA292610R0041	86
BVAD-N027GT	7TAA292150R0044	78	BVBD-P213GT	7TAA292150R0102	71	BVIDB-U237GT	7TAA292610R0042	86
BVAD-N043GT	7TAA292150R0045	78	BVBD-P299GT	7TAA292150R0103	71	BVIDB-U267GT	7TAA292610R0043	86
BVAD-N069GT	7TAA292150R0046	78	BVBD-P366GT	7TAA292150R0104	71	BVIDB-U293GT	7TAA292610R0044	86
BVAD-N076GT	7TAA292150R0047	78	BVBD-P488GT	7TAA292150R0105	71	BVIDB-U297GT	7TAA292610R0045	86

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVIDB-U323GT	7TAA292610R0046	86	BVIRB-U353	7TAA292610R0102	86	BVIVG-U566	7TAA292610R0130	87
BVIDB-U353GT	7TAA292610R0047	86	BVIRB-U357	7TAA292610R0103	86	BVIVG-U568	7TAA292610R0131	87
BVIDB-U357GT	7TAA292610R0048	86	BVIRB-U359	7TAA292610R0104	86	BVIVG-U569	7TAA292610R0132	87
BVIDB-U359GT	7TAA292610R0049	86	BVIR-M160	7TAA292610R0066	83	BVIVG-U628	7TCA292000R1039	87
BVIDG-U212GT	7TAA292610R0050	87	BVIR-M162	7TAA292610R0067	83	BVND-G000GT	7TAA292150R0127	77
BVIDG-U217GT	7TAA292610R0051	87	BVIR-M202	7TAA292610R0068	83	BVND-G00MGT	7TAA292150R0128	77
BVIDG-U242GT	7TAA292610R0052	87	BVIR-M207	7TAA292610R0069	83	BVND-G010GT	7TAA292150R0129	77
BVIDG-U247GT	7TAA292610R0053	87	BVIR-M253	7TAA292610R0070	83	BVND-G012GT	7TAA292150R0130	77
BVIDG-U293GT	7TAA292610R0054	87	BVIR-M257	7TAA292610R0071	83	BVND-G022GT	7TAA292150R0131	77
BVIDG-U297GT	7TAA292610R0055	87	BVIR-M329	7TAA292610R0072	83	BVND-G027GT	7TAA292150R0132	77
BVIDG-U353GT	7TAA292610R0056	87	BVIR-M406	7TAA292610R0073	83	BVND-G043GT	7TAA292150R0133	77
BVIDG-U357GT	7TAA292610R0057	87	BVIR-M508	7TAA292610R0074	83	BVND-G069GT	7TAA292150R0134	77
BVIDG-U359GT	7TAA292610R0058	87	BVIR-M638	7TAA292610R0075	83	BVND-G076GT	7TAA292150R0135	77
BVIDG-U433GT	7TAA292610R0059	87	BVIR-P070	7TAA292610R0076	83	BVND-G088GT	7TAA292150R0136	77
BVIDG-U436GT	7TAA292610R0060	87	BVIR-P090	7TAA292610R0077	83	BVND-G098GT	7TAA292150R0137	77
BVIDG-U439GT	7TAA292610R0061	87	BVIR-P112	7TAA292610R0078	83	BVND-M120GT	7TAA292150R0138	57
BVIDG-U506GT	7TAA292610R0062	87	BVIR-P167	7TAA292610R0079	83	BVND-M12MGT	7TAA292150R0139	57
BVIDG-U509GT	7TAA292610R0063	87	BVIRS-U162	7TCA292000R0041	86	BVND-M160GT	7TAA292150R0140	57
BVIDG-U566GT	7TAA292610R0064	87	BVIRS-U202	7TCA292000R0042	86	BVND-M162GT	7TAA292150R0141	57
BVIDG-U569GT	7TAA292610R0065	87	BVIRS-U237	7TCA292000R0043	86	BVND-M200GT	7TAA292150R0142	57
BVID-M12MGT	7TAA292610R0016	83	BVIRS-U267	7TCA292000R0044	86	BVND-M202GT	7TAA292150R0144	57
BVID-M160GT	7TAA292610R0017	83	BVIRS-U293	7TCA292000R0045	86	BVND-M203GT	7TAA292150R0146	57
BVID-M162GT	7TAA292610R0018	83	BVIRS-U323	7TCA292000R0046	86	BVND-M207GT	7TAA292150R0147	57
BVID-M207GT	7TAA292610R0019	83	BVIRS-U359	7TCA292000R0047	86	BVND-M253GT	7TAA292150R0149	57
BVID-M253GT	7TAA292610R0020	83	BVIVG-U152	7TAA292610R0105	87	BVND-M257GT	7TAA292150R0150	57
BVID-M329GT	7TAA292610R0021	83	BVIVG-U187	7TAA292610R0106	87	BVND-M323GT	7TAA292150R0152	57
BVID-M406GT	7TAA292610R0022	83	BVIVG-U210	7TAA292610R0107	87	BVND-M329GT	7TAA292150R0154	57
BVID-M508GT	7TAA292610R0023	83	BVIVG-U212	7TAA292610R0108	87	BVND-M406GT	7TAA292150R0156	57
BVID-M638GT	7TAA292610R0024	83	BVIVG-U217	7TAA292610R0109	87	BVND-M409GT	7TAA292150R0157	57
BVIRA-U150	7TAA292610R0080	86	BVIVG-U242	7TAA292610R0110	87	BVND-M506GT	7TAA292150R0159	57
BVIRA-U152	7TAA292610R0081	86	BVIVG-U243	7TAA292610R0111	87	BVND-M508GT	7TAA292150R0160	57
BVIRA-U15M	7TAA292610R0082	86	BVIVG-U247	7TAA292610R0112	87	BVND-M638GT	7TAA292150R0161	57
BVIRA-U180	7TAA292610R0083	86	BVIVG-U292	7TAA292610R0113	87	BVND-N022GT	7TAA292150R0162	78
BVIRA-U182	7TAA292610R0084	86	BVIVG-U293	7TAA292610R0114	87	BVND-N027GT	7TAA292150R0163	78
BVIRA-U187	7TAA292610R0085	86	BVIVG-U297	7TAA292610R0115	87	BVND-N043GT	7TAA292150R0164	78
BVIRA-U232	7TAA292610R0086	86	BVIVG-U299	7TAA292610R0116	87	BVND-N069GT	7TAA292150R0165	78
BVIRA-U233	7TAA292610R0087	86	BVIVG-U349	7TCA292000R1035	87	BVND-N076GT	7TAA292150R0166	78
BVIRA-U237	7TAA292610R0088	86	BVIVG-U352	7TAA292610R0169	87	BVND-N088GT	7TAA292150R0167	78
BVIRA-U343	7TAA292610R0089	86	BVIVG-U353	7TAA292610R0117	87	BVND-N098GT	7TAA292150R0168	78
BVIRA-U347	7TAA292610R0090	86	BVIVG-U356	7TAA292610R0118	87	BVND-P070GT-11	7TAA292150R0169	69
BVIRA-U402	7TAA292610R0091	86	BVIVG-U357	7TAA292610R0119	87	BVND-P070GT-8	7TAA292150R0170	69
BVIRA-U403	7TAA292610R0092	86	BVIVG-U359	7TAA292610R0120	87	BVND-P072GT-11	7TAA292150R0171	69
BVIRA-U407	7TAA292610R0093	86	BVIVG-U433	7TAA292610R0121	87	BVND-P072GT-8	7TAA292150R0172	69
BVIRB-U162	7TAA292610R0094	86	BVIVG-U436	7TAA292610R0122	87	BVND-P07MGT-11	7TAA292150R0173	69
BVIRB-U202	7TAA292610R0095	86	BVIVG-U437	7TAA292610R0123	87	BVND-P07MGT-8	7TAA292150R0174	69
BVIRB-U232	7TAA292610R0096	86	BVIVG-U439	7TAA292610R0124	87	BVND-P090GT-11	7TAA292150R0176	69
BVIRB-U237	7TAA292610R0097	86	BVIVG-U503	7TAA292610R0125	87	BVND-P090GT-8	7TAA292150R0177	69
BVIRB-U267	7TAA292610R0098	86	BVIVG-U506	7TAA292610R0126	87	BVND-P092GT-11	7TAA292150R0178	69
BVIRB-U293	7TAA292610R0099	86	BVIVG-U508	7TAA292610R0127	87	BVND-P092GT-8	7TCA292000R1057	69
BVIRB-U297	7TAA292610R0100	86	BVIVG-U509	7TAA292610R0128	87	BVND-P097GT-11	7TAA292150R0179	69
BVIRB-U323	7TAA292610R0101	86	BVIVG-U563	7TAA292610R0129	87	BVND-P097GT-8	7TCA292000R5693	69

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVND-P09MGT-11	7TAA292150R0180	69	BVNR-RE12-24	7TAA292150R0223	90	BVNV-M409	7TAA292150R0284	57
BVND-P09MGT-8	7TCA292000R1058	69	BVNR-RE1317	7TAA292150R0224	90	BVNV-M506	7TAA292150R0285	57
BVND-P110GT-11	7TAA292150R0181	69	BVNR-RE1317-28	7TAA292150R0225	90	BVNV-M508	7TAA292150R0286	57
BVND-P110GT-8	7TAA292150R0182	69	BVNR-RE17	7TAA292150R0226	90	BVNV-M638	7TAA292150R0287	57
BVND-P112GT-11	7TAA292150R0183	69	BVNR-RE17-28	7TAA292150R0227	90	BVNV-N022	7TAA292150R0289	78
BVND-P112GT-8	7TAA292150R0184	69	BVNR-RE23	7TAA292150R0229	90	BVNV-N027	7TAA292150R0290	78
BVND-P117GT-11	7TAA292150R0185	69	BVNR-RE23-32	7TAA292150R0230	90	BVNV-N043	7TAA292150R0291	78
BVND-P117GT-8	7TCA292000R1060	69	BVNR-RE29	7TAA292150R0232	90	BVNV-N069	7TAA292150R0292	78
BVND-P11MGT-11	7TAA292150R0186	69	BVNR-RE29-44	7TAA292150R0233	90	BVNV-N076	7TAA292150R0293	78
BVND-P11MGT-8	7TCA292000R5694	69	BVNR-RE36	7TAA292150R0235	90	BVNV-N088	7TAA292150R0294	78
BVND-P130GT-11	7TAA292150R0187	69	BVNR-RE36-50	7TAA292150R0236	90	BVNV-N098	7TAA292150R0295	78
BVND-P130GT-8	7TCA292000R1061	69	BVNR-RE48	7TAA292150R0238	90	BVNV-P070	7TAA292150R0296	69
BVND-P132GT-11	7TAA292150R0188	69	BVNR-RE48-65	7TAA292150R0239	90	BVNV-P072	7TCA292000R1118	69
BVND-P132GT-8	7TCA292000R1062	69	BVNR-REM162	7TAA292150R0240	90	BVNV-P07M	7TAA292150R0297	69
BVND-P137GT-11	7TAA292150R0189	69	BVNR-REM162-24	7TAA292150R0241	90	BVNV-P090	7TAA292150R0298	69
BVND-P137GT-8	7TCA292000R1064	69	BVNR-REM187	7TAA292150R0242	90	BVNV-P092	7TAA292150R0299	69
BVND-P13MGT-11	7TAA292150R0190	69	BVNR-REM187-28	7TAA292150R0243	90	BVNV-P097	7TAA292150R1288	69
BVND-P13MGT-8	7TCA292000R1065	69	BVNR-REM207	7TAA292150R0244	90	BVNV-P09M	7TAA292150R0300	69
BVND-P160GT-11	7TAA292150R0191	69	BVNR-REM207-28	7TAA292150R0245	90	BVNV-P110	7TAA292150R0301	69
BVND-P160GT-8	7TCA292000R5695	69	BVNR-REM253	7TAA292150R0246	90	BVNV-P112	7TAA292150R0302	69
BVND-P162GT-11	7TAA292150R0192	69	BVNR-REM253-32	7TAA292150R0247	90	BVNV-P117	7TAA292150R0303	69
BVND-P163GT-11	7TAA292150R0193	69	BVNR-REM329	7TAA292150R0248	90	BVNV-P11M	7TAA292150R0304	69
BVND-P163GT-8	7TCA292000R1066	69	BVNR-REM329-44	7TAA292150R0249	90	BVNV-P130	7TAA292150R0305	69
BVND-P167GT-11	7TAA292150R0194	69	BVNR-REM406	7TAA292150R0250	90	BVNV-P132	7TAA292150R0306	69
BVND-P167GT-8	7TAA292150R0195	69	BVNR-REM406-50	7TAA292150R0251	90	BVNV-P137	7TAA292150R0307	69
BVND-P213GT	7TAA292150R0196	69	BVNR-REM508	7TAA292150R0252	90	BVNV-P13M	7TAA292150R0308	69
BVND-P296GT	7TAA292150R0197	69	BVNR-REM508-65	7TAA292150R0253	90	BVNV-P162	7TAA292150R0309	69
BVND-P299GT	7TAA292150R0198	69	BVNV-G000	7TAA292150R0256	77	BVNV-P163	7TCA292000R1137	69
BVND-P366GT	7TAA292150R0199	69	BVNV-G00M	7TAA292150R0257	77	BVNV-P167	7TAA292150R0310	69
BVND-P368GT	7TAA292150R0200	69	BVNV-G010	7TAA292150R0258	77	BVNV-P213	7TAA292150R0311	69
BVND-P428GT	7TAA292150R0201	69	BVNV-G012	7TAA292150R0259	77	BVNV-P296	7TAA292150R0312	69
BVND-P488GT	7TAA292150R0202	69	BVNV-G022	7TAA292150R0260	77	BVNV-P299	7TAA292150R0313	69
BVNDZ-M160GT	7TAA292150R0204	58	BVNV-G027	7TAA292150R0261	77	BVNV-P366	7TAA292150R0314	69
BVNDZ-M162GT	7TAA292150R0205	58	BVNV-G043	7TAA292150R0262	77	BVNV-P368	7TCA292000R1147	69
BVNDZ-M207GT	7TAA292150R0206	58	BVNV-G069	7TAA292150R0263	77	BVNV-P428	7TAA292150R0315	69
BVNDZ-M253GT	7TAA292150R0207	58	BVNV-G076	7TAA292150R0264	77	BVNV-P488	7TAA292150R0316	69
BVNDZ-M329GT	7TAA292150R0208	58	BVNV-G088	7TAA292150R0265	77	BVNZ-M162S	7TAA292150R0317	58
BVNDZ-M406GT	7TAA292150R0209	58	BVNV-G098	7TAA292150R0266	77	BVNZ-M207S	7TAA292150R0318	58
BVNDZ-M508GT	7TAA292150R0210	58	BVNV-M120	7TAA292150R0267	57	BVNZ-M253S	7TAA292150R0319	58
BVNDZ-M638GT	7TAA292150R0211	58	BVNV-M12M	7TAA292150R0268	57	BVNZ-M329S	7TAA292150R0320	58
BVNDZ-P090GT	7TAA292150R0212	70	BVNV-M160	7TAA292150R0269	57	BVNZ-M406S	7TAA292150R0321	58
BVNDZ-P112GT	7TAA292150R0213	70	BVNV-M162	7TAA292150R0270	57	BVNZ-M508S	7TAA292150R0322	58
BVNDZ-P132GT	7TAA292150R0214	70	BVNV-M200	7TAA292150R0272	57	BVNZ-M638S	7TAA292150R0323	58
BVNDZ-P137GT	7TAA292150R0215	70	BVNV-M202	7TAA292150R0273	57	BVNZ-P090S	7TAA292150R0327	70
BVNDZ-P163GT	7TAA292150R0216	70	BVNV-M203	7TAA292150R0274	57	BVNZ-P112S	7TAA292150R0328	70
BVNDZ-P167GT	7TAA292150R0217	70	BVNV-M207	7TAA292150R0275	57	BVNZ-P132S	7TAA292150R0329	70
BVNDZ-P213GT	7TAA292150R0218	70	BVNV-M253	7TAA292150R0277	57	BVNZ-P137S	7TAA292150R0330	70
BVNDZ-P299GT	7TAA292150R0219	70	BVNV-M257	7TAA292150R0279	57	BVNZ-P163S	7TAA292150R0331	70
BVNDZ-P366GT	7TAA292150R0220	70	BVNV-M323	7TAA292150R0281	57	BVNZ-P167S	7TAA292150R0332	70
BVNDZ-P488GT	7TAA292150R0221	70	BVNV-M329	7TAA292150R0282	57	BVNZ-P213S	7TAA292150R0333	70
BVNR-RE12	7TAA292150R0222	90	BVNV-M406	7TAA292150R0283	57	BVNZ-P299S	7TAA292150R0334	70

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVNZ-P366S	7TAA292150R0335	70	BVWD-M160GT	7TAA292150R0377	59	BVWV-G012	7TAA292150R0417	77
BVNZ-P488S	7TAA292150R0336	70	BVWD-M162GT	7TAA292150R0378	59	BVWV-G022	7TAA292150R0418	77
BVOD-P167GT	7TAA292150R0337	83	BVWD-M200GT	7TAA292150R0379	59	BVWV-G027	7TAA292150R0419	77
BVOD-P213GT	7TAA292150R0338	83	BVWD-M202GT	7TAA292150R0380	59	BVWV-G043	7TAA292150R0420	77
BVOD-P299GT	7TAA292150R0339	83	BVWD-M207GT	7TAA292150R0381	59	BVWV-G069	7TAA292150R0421	77
BVOD-P366GT	7TAA292150R0340	83	BVWD-M253GT	7TAA292150R0382	59	BVWV-G076	7TAA292150R0422	77
BVOD-P488GT	7TAA292150R0341	83	BVWD-M329GT	7TAA292150R0383	59	BVWV-G088	7TAA292150R0423	77
BVOV-P167	7TAA292150R0342	83	BVWD-M406GT	7TAA292150R0384	59	BVWV-G098	7TAA292150R0424	77
BVOV-P213	7TAA292150R0343	83	BVWD-M508GT	7TAA292150R0385	59	BVWV-M120	7TAA292150R0425	59
BVOV-P299	7TAA292150R0344	83	BVWD-N022GT	7TAA292150R0386	79	BVWV-M12M	7TAA292150R0426	59
BVOV-P366	7TAA292150R0345	83	BVWD-N027GT	7TAA292150R0387	79	BVWV-M160	7TAA292150R0427	59
BVOV-P488	7TAA292150R0346	83	BVWD-N043GT	7TAA292150R0388	79	BVWV-M162	7TAA292150R0428	59
BVSGD-1212GT	7TAA292300R0000	90	BVWD-N043GT	7TAA292150R0388	79	BVWV-M202	7TAA292150R0429	59
BVSGD-1717GT	7TAA292300R0001	90	BVWD-N069GT	7TAA292150R0389	79	BVWV-M207	7TAA292150R0430	59
BVSGD-2323GT	7TAA292300R0002	90	BVWD-N076GT	7TAA292150R0390	79	BVWV-M253	7TAA292150R0431	59
BVSGD-2929GT	7TAA292300R0003	90	BVWD-N088GT	7TAA292150R0391	79	BVWV-M329	7TAA292150R0432	59
BVSGD-3636GT	7TAA292300R0004	90	BVWD-N098GT	7TAA292150R0392	79	BVWV-M406	7TAA292150R0433	59
BVSGD-4848GT	7TAA292300R0005	90	BVWD-P070GT-11	7TAA292150R0393	72	BVWV-M508	7TAA292150R0434	59
BVSGR-1212	7TAA292300R0006	90	BVWD-P070GT-8	7TCA292000R1233	72	BVWV-N022	7TAA292150R0435	79
BVSGR-1717	7TAA292300R0007	90	BVWD-P072GT-11	7TAA292150R0394	72	BVWV-N027	7TAA292150R0436	79
BVSGR-2323	7TAA292300R0008	90	BVWD-P072GT-8	7TCA292000R5702	72	BVWV-N043	7TAA292150R0437	79
BVSGR-2929	7TAA292300R0009	90	BVWD-P07MGT-11	7TAA292150R0395	72	BVWV-N069	7TAA292150R0438	79
BVSGR-3636	7TAA292300R0010	90	BVWD-P07MGT-8	7TCA292000R5703	72	BVWV-N076	7TAA292150R0439	79
BVSGR-4848	7TAA292300R0011	90	BVWD-P090GT-11	7TAA292150R0396	72	BVWV-N088	7TAA292150R0440	79
BVTD-101010GT	7TAA292150R1292	88	BVWD-P090GT-8	7TCA292000R1236	72	BVWV-N098	7TAA292150R0441	79
BVTD-121212GT	7TAA292150R1293	88	BVWD-P092GT-11	7TAA292150R0397	72	BVWV-P070	7TAA292150R0442	72
BVTD-171717GT	7TAA292150R1294	88	BVWD-P092GT-8	7TCA292000R5704	72	BVWV-P072	7TCA292000R5709	72
BVTD-232323GT	7TAA292150R0347	88	BVWD-P09MGT-11	7TAA292150R0398	72	BVWV-P07M	7TAA292150R0443	72
BVTD-292929GT	7TAA292150R0348	88	BVWD-P09MGT-8	7TCA292000R5705	72	BVWV-P090	7TAA292150R0444	72
BVTD-363636GT	7TAA292150R0349	88	BVWD-P110GT-11	7TAA292150R0399	72	BVWV-P092	7TAA292150R0445	72
BVTD-484848GT	7TAA292150R0350	88	BVWD-P110GT-8	7TCA292000R1238	72	BVWV-P09M	7TAA292150R0446	72
BVTR-101010	7TAA292150R0351	88	BVWD-P112GT-11	7TAA292150R0400	72	BVWV-P110	7TAA292150R0447	72
BVTR-121212	7TAA292150R0353	88	BVWD-P112GT-8	7TAA292150R0401	72	BVWV-P112	7TAA292150R0448	72
BVTR-171717	7TAA292150R0355	88	BVWD-P11MGT-11	7TAA292150R0402	72	BVWV-P11M	7TCA292000R1259	72
BVTR-232323	7TAA292150R0358	88	BVWD-P11MGT-8	7TCA292000R5706	72	BVWV-P130	7TAA292150R0449	72
BVTR-292929	7TAA292150R0359	88	BVWD-P130GT-11	7TAA292150R0403	72	BVWV-P132	7TAA292150R0450	72
BVTR-363636	7TAA292150R0361	88	BVWD-P130GT-8	7TCA292000R1239	72	BVWV-P137	7TAA292150R0451	72
BVTR-484848	7TAA292150R0363	88	BVWD-P132GT-11	7TAA292150R0404	72	BVWV-P13M	7TCA292000R1265	72
BVWD-G000GT	7TAA292150R0364	77	BVWD-P132GT-8	7TCA292000R1240	72	BVWV-P167	7TAA292150R0452	72
BVWD-G00MGT	7TAA292150R0365	77	BVWD-P137GT-11	7TAA292150R0405	72	BVWV-P213	7TAA292150R0453	72
BVWD-G010GT	7TAA292150R0366	77	BVWD-P137GT-8	7TAA292150R0406	72	BVWV-P299	7TAA292150R0454	72
BVWD-G012GT	7TAA292150R0367	77	BVWD-P13MGT-11	7TAA292150R0407	72	BVWV-P366	7TAA292150R0455	72
BVWD-G022GT	7TAA292150R0368	77	BVWD-P13MGT-8	7TCA292000R5707	72	BVWV-P488	7TAA292150R0456	72
BVWD-G027GT	7TAA292150R0369	77	BVWD-P167GT-11	7TAA292150R0408	72	BVYD-100707GT	7TAA292150R0457	88
BVWD-G043GT	7TAA292150R0370	77	BVWD-P167GT-8	7TAA292150R0409	72	BVYD-121010GT	7TAA292150R0458	88
BVWD-G069GT	7TAA292150R0371	77	BVWD-P213GT	7TAA292150R0410	72	BVYD-171212GT	7TAA292150R0459	88
BVWD-G076GT	7TAA292150R0372	77	BVWD-P299GT	7TAA292150R0411	72	BVYD-231717GT	7TAA292150R0460	88
BVWD-G088GT	7TAA292150R0373	77	BVWD-P366GT	7TAA292150R0412	72	BVYD-292323GT	7TAA292150R0461	88
BVWD-G098GT	7TAA292150R0374	77	BVWD-P488GT	7TAA292150R0413	72	BVYD-362929GT	7TAA292150R0462	88
BVWD-M120GT	7TAA292150R0375	59	BVWV-G000	7TAA292150R0414	77	BVYD-483636GT	7TAA292150R0463	88
BVWD-M12MGT	7TAA292150R0376	59	BVWV-G00M	7TAA292150R0415	77	BVYR-100707	7TAA292150R0464	88
			BVWV-G010	7TAA292150R0416	77			

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
BVYR-121010	7TAA292150R0465	88	CYLT-12B	7TAA292240R0022	17	E 155p28	7TCA292000R9109	44,45, 62,64, 74
BVYR-171212	7TAA292150R0466	88	CYLT-12S	7TAA292240R0023	17	E 156p25HF	7TCA292000R9104	44,62
BVYR-231717	7TAA292150R0467	88	CYLT-17B	7TAA292240R0024	17	E 156p32	7TCA292000R9110	44,45, 62,64, 74
BVYR-292323	7TAA292150R0468	88	CYLT-17S	7TAA292240R0025	17	E 156p34	7TCA292000R9121	74
BVYR-362929	7TAA292150R0469	88	CYLT-23B	7TAA292240R0026	17	E 156p36	7TCA292000R9111	44,45, 62,64, 74
BVYR-483636	7TAA292150R0470	88	CYLT-23S	7TAA292240R0027	17	E 157p36HF	7TCA292000R9112	44,45, 62,64
C.66.10GR	7TAA292910R0000	144	CYLT-29B	7TAA292240R0028	17	E 157p40HF	7TCA292000R9113	44,45, 62,64
C.66.10SW	7TAA292910R0001	144	CYLT-29S	7TAA292240R0029	17	E 158p44	7TCA292000R9114	44,45, 62,64, 74
C.66.12GR	7TAA292910R0002	144	CYLT-36B	7TAA292240R0030	17	E 158pm1X35	7TCA292000R9127	44,45, 62,64
C.66.12SW	7TAA292910R0003	144	CYLT-36S	7TAA292240R0031	17	EK 150p7	7TCA292000R9053	44,62,64
C.66.16GR	7TAA292910R0004	144	CYLT-48B	7TAA292240R0032	17	EK 150p8	7TCA292000R9068	44,62
C.66.16SW	7TAA292910R0005	144	CYLT-48S	7TAA292240R0033	17	EK 150p9	7TCA292000R9069	44,62
C.66.20GR	7TAA292910R0006	144	E 150p7	7TCA292000R9071	44,45, 62,64, 68,74	EK 154p13	7TCA292000R9088	44,62
C.66.20SW	7TAA292910R0007	144	E 150p8	7TCA292000R9074	44,45, 62,64, 68	EK 154p16	7TCA292000R9123	44,62
C.66.25GR	7TAA292910R0008	144	E 150p9	7TCA292000R9075	44,45, 62,64, 68,74	EK 155p18	7TCA292000R9100	44,45,62
C.66.25SW	7TAA292910R0009	144	E151P11	7TCA292000R9117	74	EK 155p20	7TCA292000R9102	44,45,62
C.66.30GR	7TAA292910R0010	144	E151P7	7TCA292000R9115	74	EK 155p25	7TCA292000R9103	44,62
C.66.30SW	7TAA292910R0011	144	E151P9	7TCA292000R9116	74	EK 156p28	7TCA292000R9105	44,62
C.66.40GR	7TAA292910R0012	144	E 152p11	7TCA292000R9081	44,45, 62,64, 68,74	ESDG-56B	7TCA292000R7720	17
C.66.40SW	7TAA292910R0013	144	E 152p13	7TCA292000R9083	44,45, 62,64, 68	ESDG-70B	7TCA292000R7722	17
C.66.45SW	7TAA292910R0014	144	E 152p7	7TCA292000R9076	44,45, 62,64, 68	ESDG-95B	7TCA292000R1850	17
CUSG-17B	7TAA292490R0000	31	E 152p9	7TCA292000R9077	44,45, 62,64, 68	ESDT-07B	7TAA292240R0049	17
CUSG-17S	7TCA292000R1523	31	E 153p11	7TCA292000R9090	44,62,74	ESDT-10B	7TAA292240R0050	17
CUSG-23B	7TAA292490R0001	31	E 153p13	7TCA292000R9091	44,45, 62,64, 68,74	ESDT-12B	7TAA292240R0051	17
CUSG-23S	7TAA292490R0002	31	E 153p16	7TCA292000R9092	44,45, 62,64, 68,74	ESDT-17B	7TAA292240R0052	17
CUSG-29B	7TAA292490R0003	31	E 154p11	7TCA292000R9094	74	ESDT-23B	7TAA292240R0053	17
CUSG-29S		31	E 154p13	7TCA292000R9095	44,45	ESDT-29B	7TAA292240R0054	17
CUSG-36B	7TAA292490R0004	31	E 154p16	7TCA292000R9096		ESDT-36B	7TAA292240R0055	17
CUSG-36S		31	E 154p18	7TCA292000R9097	44,45, 62,64, 68,74	ESDT-48B	7TAA292240R0056	17
CUSG-48B	7TAA292490R0005	31	E 154p20	7TCA292000R9098	44,45, 62,64, 68,74	EWZ-02	7TAA292880R0000	116
CUSG-48S		31	E 155p16	7TCA292000R9107	44,62	EWZ-03	7TAA292880R0001	116
CYLG-125B	7TAA292360R0000	17	E 155p18	7TCA292000R9101	44,62,64	F.304.10	7TAA292910R0015	149
CYLG-125S	7TAA292360R0001	17	E 155p20	7TCA292000R9138	44,62,64	F.304.12	7TAA292910R0016	149
CYLG-23B	7TAA292240R0008	17	E 155p25	7TCA292000R9108	44,45, 62,64, 74	F.304.17	7TAA292910R0017	149
CYLG-23S	7TAA292240R0009	17				F.304.23	7TAA292910R0018	149
CYLG-29B	7TAA292240R0010	17				F.304.29	7TAA292910R0019	149
CYLG-29S	7TAA292240R0011	17				F.304.36	7TAA292910R0020	149
CYLG-36B	7TAA292240R0012	17				F.304.48	7TAA292910R0021	149
CYLG-36S	7TAA292240R0013	17				F.66.04GR	7TAA292910R0024	144
CYLG-48B	7TAA292240R0014	17				F.66.04SW	7TAA292910R0025	144
CYLG-48S	7TAA292240R0015	17				F.66.06GR	7TAA292910R0026	144
CYLG-56B	7TAA292360R0002	17				F.66.06SW	7TAA292910R0027	144
CYLG-56S	7TAA292360R0003	17				F.66.08GR	7TAA292910R0028	144
CYLG-70B	7TAA292360R0004	17						
CYLG-70S	7TAA292360R0006	17						
CYLG-95B	7TAA292360R0008	17						
CYLG-95S	7TAA292360R0010	17						
CYLT-07B	7TAA292240R0018	17						
CYLT-07S	7TAA292240R0019	17						
CYLT-10B	7TAA292240R0020	17						
CYLT-10S	7TAA292240R0021	17						

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
F.66.08SW	7TAA292910R0029	144	GMM-48	7TAA292670R0040	109	JKNH-M638	7TCA292000R9361	49
F.66.10GR	7TAA292910R0030	144	GMM-M12	7TAA292670R0041	109	JLLPA-12A	7TCA292000R9663	30
F.66.10SW	7TAA292910R0031	144	GMM-M16	7TAA292670R0043	109	JLLPAG-17A	7TCA292000R9664	30
F.66.12GR	7TAA292910R0032	144	GMM-M20	7TAA292670R0045	109	JLLPAG-23A	7TCA292000R9665	30
F.66.12SW	7TAA292910R0033	144	GMM-M25	7TAA292670R0047	109	JLLPAG-29A	7TCA292000R9666	30
F.66.16GR	7TAA292910R0034	144	GMM-M32	7TAA292670R0049	109	JLLPAG-36A	7TCA292000R9667	30
F.66.16SW	7TAA292910R0035	144	GMM-M40	7TAA292670R0051	109	JLLPAG-48A	7TCA292000R9668	30
F.66.20GR	7TAA292910R0036	144	GMM-M50	7TAA292670R0052	109	JXPCSFSG-17BO	7TCA292000R9616	29
F.66.20SW	7TAA292910R0037	144	GMM-M63	7TAA292670R0053	109	JXPCSFSG-23BO	7TCA292000R9610	29
F.66.25GR	7TAA292910R0038	144	GMN-07	7TAA292670R0054	108	JXPCSFSG-29BO	7TCA292000R9617	29
F.66.25SW	7TAA292910R0039	144	GMN-09	7TAA292670R0055	108	JXPCSFSG-36BO	7TCA292000R9618	29
F.66.30GR	7TAA292910R0040	144	GMN-11	7TAA292670R0056	108	JXPCSFSG-48BO	7TCA292000R9619	29
F.66.30SW	7TAA292910R0041	144	GMN-13	7TAA292670R0057	108	JXPCSFT-12BO	7TCA292000R9615	29
F.66.40GR	7TAA292910R0042	144	GMN-16	7TAA292670R0058	108	KNH2-NW10	7TAA292560R0000	104
F.66.40SW	7TAA292910R0043	144	GMN-21	7TAA292670R0059	108	KNH2-NW12	7TAA292560R0001	104
F.66.50GR	7TAA292910R0044	144	GMN-29	7TAA292670R0060	108	KNH2-NW17	7TAA292560R0002	104
F.66.50SW	7TAA292910R0045	144	GMN-36	7TAA292670R0061	108	KNH2-NW23	7TAA292560R0003	104
F.66.70GR	7TAA292910R0046	144	GMN-48	7TAA292670R0062	108	KNH2-NW29	7TAA292560R0004	104
F.66.70SW	7TAA292910R0047	144	GMN-M12	7TAA292670R0063	108	KNH2-NW36	7TAA292560R0005	104
F.PX.04GR	7TAA292910R0065	145	GMN-M16	7TAA292670R0064	108	KNH2-NW48	7TAA292560R0006	104
F.PX.06GR	7TAA292910R0066	145	GMN-M20	7TAA292670R0065	108	L.66.04GR	7TAA292910R0175	145
F.PX.08GR	7TAA292910R0067	145	GMN-M25	7TAA292670R0066	108	L.66.04SW	7TAA292910R0176	145
F.PX.10GR	7TAA292910R0068	145	GMN-M32	7TAA292670R0067	108	L.66.08GR	7TAA292910R0177	145
F.PX.12GR	7TAA292910R0069	145	GMN-M40	7TAA292670R0068	108	L.66.08SW	7TAA292910R0178	145
F.PX.16GR	7TAA292910R0070	145	GMN-M50	7TAA292670R0069	108	L.66.10GR	7TAA292910R0179	145
F.PX.20GR	7TAA292910R0071	145	GMN-M63	7TAA292670R0070	108	L.66.10SW	7TAA292910R0180	145
F.PX.25GR	7TAA292910R0072	145	HSG-00	7TAA292880R0004	149	L.66.16GR	7TAA292910R0181	145
F.PX.30GR	7TAA292910R0073	145	HSG-00-SB	7TAA292880R0005	149	L.66.16SW	7TAA292910R0182	145
F.PX.40GR	7TAA292910R0074	145	JENQ-M162-10	7TCA292000R0463	99	L.66.20GR	7TAA292910R0183	145
FP-38	7TAA292880R0002	117	JENQ-M207-10	7TCA292000R0464	99	L.66.20SW	7TAA292910R0184	145
FP-52	7TAA292880R0003	117	JENQ-M253-11	7TCA292000R0465	99	L.66.25GR	7TAA292910R0185	145
G.PX.05SW	7TAA292910R0075	146	JENQ-M329-13	7TCA292000R0466	99	L.66.25SW	7TAA292910R0186	145
G.PX.08SW	7TAA292910R0076	146	JENQ-M406-13	7TCA292000R0467	99	L.66.30GR	7TAA292910R0187	145
G.PX.10SW	7TAA292910R0077	146	JENQ-M506-14	7TCA292000R0468	99	L.66.30SW	7TAA292910R0188	145
G.PX.13SW	7TAA292910R0078	146	JFBDG-17C01	7TCA292000R7548	29	L.66.40GR	7TAA292910R0189	145
G.PX.16SW	7TAA292910R0079	146	JFBDG-23C01	7TCA292000R7549	29	L.66.40SW	7TAA292910R0190	145
G.PX.19SW	7TAA292910R0080	146	JFBDG-29C01	7TCA292000R7933	29	L.66.50GR	7TAA292910R0191	145
G.PX.25SW	7TAA292910R0081	146	JFBDG-36C01	7TCA292000R7932	29	L.66.50SW	7TAA292910R0192	145
G.PX.29SW	7TAA292910R0082	146	JFBDG-48C01	7TCA292000R7934	29	L.PX.04GR	7TAA292910R0193	146
G.PX.32SW	7TAA292910R0083	146	JFBTD-12C01	7TCA292000R7547	29	L.PX.04SW	7TAA292910R0194	146
G.PX.38SW	7TAA292910R0084	146	JKNH-M162	7TCA292000R9305	49	L.PX.08GR	7TAA292910R0195	146
G.PX.50SW	7TAA292910R0085	146	JKNH-M202	7TCA292000R9352	49	L.PX.08SW	7TAA292910R0196	146
GMM-07	7TAA292670R0028	109	JKNH-M207	7TCA292000R9306	49	L.PX.10GR	7TAA292910R0197	146
GMM-09	7TAA292670R0029	109	JKNH-M253	7TCA292000R9307	49	L.PX.10SW	7TAA292910R0198	146
GMM-11	7TAA292670R0030	109	JKNH-M257	7TCA292000R9357	49	L.PX.16GR	7TAA292910R0199	146
GMM-13	7TAA292670R0032	109	JKNH-M323	7TCA292000R9358	49	L.PX.16SW	7TAA292910R0200	146
GMM-16	7TAA292670R0034	109	JKNH-M329	7TCA292000R9308	49	L.PX.20GR	7TAA292910R0201	146
GMM-21	7TAA292670R0035	109	JKNH-M406	7TCA292000R9309	49	L.PX.20SW	7TAA292910R0202	146
GMM-29	7TAA292670R0037	109	JKNH-M409	7TCA292000R9359	49	L.PX.25GR	7TAA292910R0203	146
GMM-36	7TAA292670R0038	109	JKNH-M506	7TCA292000R9360	49	L.PX.25SW	7TAA292910R0204	146
GMM-42	7TAA292670R0039	109	JKNH-M508	7TCA292000R9310	49	L.PX.30GR	7TAA292910R0205	146

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
L.PX.30SW	7TAA292910R0206	146	LLPFG-17A	7TAA292030R0048	35	M50M32M/6	7TAA292550R0070	105
L.PX.40GR	7TAA292910R0207	146	LLPFG-17S	7TAA292030R0049	35	M50M40M	7TAA292550R0071	105
L.PX.40SW	7TAA292910R0208	146	LLPFG-23A	7TAA292030R0050	35	M50M40M/6	7TAA292550R0072	105
L.PX.50GR	7TAA292910R0209	146	LLPFG-23S	7TAA292030R0051	35	M50M63M	7TAA292550R0073	105
L.PX.50SW	7TAA292910R0210	146	LLPFG-29A	7TAA292030R0052	35	M63M40M	7TCA292000R2520	105
LLPA-07A	7TAA292030R0000	34	LLPFG-29S	7TAA292030R0053	35	M63M40M/6	7TCA292000R0162	105
LLPA-07S	7TAA292030R0001	34	LLPFG-36A	7TAA292030R0054	35	M63M50M	7TAA292550R0074	105
LLPA-10A	7TAA292030R0002	34	LLPFG-36S	7TAA292030R0055	35	M63M50M/6	7TAA292550R0075	105
LLPA-10S	7TAA292030R0003	34	LLPFG-48A	7TAA292030R0056	35	MAVIK-M20/01	7TAA292660R0006	118
LLPA-12A	7TAA292030R0005	34	LLPFG-48S	7TAA292030R0057	35	MAVIK-M25/01	7TAA292660R0007	118
LLPA-12S	7TAA292030R0006	34	LLPO-07A	7TAA292030R0075	34	MAVIK-M32/01	7TAA292660R0008	118
LLPA-17A	7TAA292030R0007	34	LLPO-07S	7TAA292030R0076	34	MAVIK-M40/01	7TAA292660R0009	118
LLPA-17S	7TAA292030R0008	34	LLPO-10A	7TAA292030R0077	34	MAVIK-M50/01	7TAA292660R0010	118
LLPA-23A	7TAA292030R0009	34	LLPO-10S	7TAA292030R0078	34	MAVIK-M63/01	7TAA292660R0011	118
LLPA-23S	7TAA292030R0010	34	LLPO-12A	7TAA292030R0079	34	MAVI-M20/01	7TAA292660R0000	118
LLPA-29A	7TAA292030R0011	34	LLPO-12S	7TAA292030R0080	34	MAVI-M25/01	7TAA292660R0001	118
LLPA-29S	7TAA292030R0012	34	LLPO-17A	7TAA292030R0081	34	MAVI-M32/01	7TAA292660R0002	118
LLPA-36A	7TAA292030R0013	34	LLPO-17S	7TAA292030R0082	34	MAVI-M40/01	7TAA292660R0003	118
LLPA-36S	7TAA292030R0014	34	LLPO-23A	7TAA292030R0083	34	MAVI-M50/01	7TAA292660R0004	118
LLPA-48A	7TAA292030R0015	34	LLPO-23S	7TAA292030R0084	34	MAVI-M63/01	7TAA292660R0005	118
LLPA-48S	7TAA292030R0016	34	LLPO-29A	7TAA292030R0085	34	MKAH-M120-10	7TAA292400R0062	46
LLPAG-125A	7TAA292030R0017	34,122	LLPO-29S	7TAA292030R0086	34	MKAH-M160-10	7TAA292400R0063	46
LLPAG-125S	7TAA292030R0018	34,122	LLPO-36A	7TAA292030R0087	34	MKAH-M162-10	7TAA292400R0064	46
LLPAG-17A	7TAA292030R0019	34	LLPO-36S	7TAA292030R0088	34	MKAH-M202-10	7TAA292400R0065	46
LLPAG-17S	7TAA292030R0020	34	LLPO-48A	7TAA292030R0089	34	MKAH-M207-10	7TAA292400R0066	46
LLPAG-23A	7TAA292030R0021	34	LLPO-48S	7TAA292030R0090	34	MKAH-M253-11	7TAA292400R0067	46
LLPAG-23S	7TAA292030R0022	34	M12M16M	7TAA292550R0044	105	MKAH-M257-11	7TAA292400R0068	46
LLPAG-29A	7TAA292030R0023	34	M16M12M	7TAA292550R0045	105	MKAH-M323-13	7TAA292400R0069	46
LLPAG-29S	7TAA292030R0024	34	M16M12M/6	7TAA292550R0046	105	MKAH-M329-13	7TAA292400R0070	46
LLPAG-36A	7TAA292030R0025	34	M16M20M	7TAA292550R0047	105	MKAH-M406-13	7TAA292400R0071	46
LLPAG-36S	7TAA292030R0026	34	M20M12M	7TAA292550R0048	105	MKAH-M409-13	7TAA292400R0072	46
LLPAG-48A	7TAA292030R0027	34	M20M12M/6	7TAA292550R0049	105	MKAH-M506-14	7TAA292400R0073	46
LLPAG-48S	7TAA292030R0028	34	M20M16M	7TAA292550R0050	105	MKAH-M508-14	7TAA292400R0074	46
LLPAG-56A	7TAA292030R0029	34,122	M20M16M/6	7TAA292550R0051	105	MKAH-M638-14	7TAA292400R0075	46
LLPAG-56S	7TAA292030R0030	34,122	M20M25M	7TAA292550R0052	105	MKBH-M120-10	7TAA292400R0076	46
LLPAG-70A	7TAA292030R0031	34,122	M25M16M	7TAA292550R0053	105	MKBH-M160-10	7TAA292400R0077	46
LLPAG-70S	7TAA292030R0032	34,122	M25M16M/6	7TAA292550R0054	105	MKBH-M162-10	7TAA292400R0078	46
LLPAG-95A	7TAA292030R0033	34,122	M25M20M	7TAA292550R0055	105	MKBH-M202-10	7TAA292400R0079	46
LLPAG-95S	7TAA292030R0034	34,122	M25M20M/6	7TAA292550R0056	105	MKBH-M207-10	7TAA292400R0080	46
LLPF-07A	7TAA292030R0035	35	M25M32M	7TAA292550R0057	105	MKBH-M253-11	7TAA292400R0081	46
LLPF-07S	7TAA292030R0036	35	M32M20M	7TAA292550R0058	105	MKBH-M257-11	7TAA292400R0082	46
LLPF-10A	7TAA292030R0037	35	M32M20M/6	7TAA292550R0059	105	MKBH-M323-13	7TAA292400R0083	46
LLPF-10S	7TAA292030R0038	35	M32M25M	7TAA292550R0060	105	MKBH-M329-13	7TAA292400R0084	46
LLPF-12A	7TAA292030R0039	35	M32M25M/6	7TAA292550R0061	105	MKBH-M406-13	7TAA292400R0085	46
LLPF-12S	7TAA292030R0040	35	M32M40M	7TAA292550R0062	105	MKBH-M409-13	7TAA292400R0086	46
LLPF-17A	7TAA292030R0041	35	M40M25M	7TAA292550R0063	105	MKBH-M506-14	7TAA292400R0087	46
LLPF-17S	7TAA292030R0042	35	M40M25M/6	7TAA292550R0064	105	MKBH-M508-14	7TAA292400R0088	46
LLPF-23A	7TAA292030R0043	35	M40M32M	7TAA292550R0065	105	MKBH-M638-14	7TAA292400R0089	46
LLPF-23S	7TAA292030R0044	35	M40M32M/6	7TAA292550R0066	105	MKNH-M120-10	7TAA292400R0090	43
LLPF-29A	7TAA292030R0045	35	M40M50M	7TAA292550R0067	105	MKNH-M160-10	7TAA292400R0091	43
LLPF-29S	7TAA292030R0046	35	M50M32M	7TAA292550R0069	105	MKNH-M162-10	7TAA292400R0092	43

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
MKNH-M202-10	7TAA292400R0093	43	MVBV-M257-11	7TAA292150R0499	66	MVNV-M506-9	7TAA292150R0543	60
MKNH-M207-10	7TAA292400R0094	43	MVBV-M257-7	7TAA292150R0500	66	MVNV-M508-14	7TAA292150R0544	60
MKNH-M253-11	7TAA292400R0095	43	MVBV-M323-13	7TAA292150R0501	66	MVNV-M508-9	7TAA292150R0545	60
MKNH-M257-11	7TAA292400R0096	43	MVBV-M323-8	7TAA292150R0502	66	MVNV-M638-10	7TAA292150R0546	60
MKNH-M323-13	7TAA292400R0097	43	MVBV-M329-13	7TAA292150R0503	66	MVNV-M638-14	7TAA292150R0547	60
MKNH-M329-13	7TAA292400R0098	43	MVBV-M329-8	7TAA292150R0504	66	MVNV-P090	7TAA292150R0548	73
MKNH-M406-13	7TAA292400R0099	43	MVBV-M406-13	7TAA292150R0505	66	MVNV-P112	7TAA292150R0549	73
MKNH-M409-13	7TAA292400R0100	43	MVBV-M406-8	7TAA292150R0506	66	MVNV-P137	7TAA292150R0550	73
MKNH-M506-14	7TAA292400R0101	43	MVBV-M409-13	7TAA292150R0507	66	MVNV-P167	7TAA292150R0551	73
MKNH-M508-14	7TAA292400R0102	43	MVBV-M409-8	7TAA292150R0508	66	MVNV-P213	7TAA292150R0552	73
MKNH-M638-14	7TAA292400R0103	43	MVBV-M506-14	7TAA292150R0509	66	MVNV-P293	7TAA292150R0553	73
MONK-M162	7TCA292000R4711	98	MVBV-M506-9	7TAA292150R0510	66	MVNV-P299	7TAA292150R0554	73
MONK-M207	7TCA292000R4712	98	MVBV-M508-14	7TAA292150R0511	66	MVNV-P366	7TAA292150R0555	73
MONK-M253	7TCA292000R4713	98	MVBV-M508-9	7TAA292150R0512	66	MVNV-P488	7TAA292150R0556	73
MONK-M329	7TCA292000R4714	98	MVBV-M638-10	7TAA292150R0513	66	MVWV-M120-10	7TAA292150R0557	67
MONK-M406	7TCA292000R4715	98	MVBV-M638-14	7TAA292150R0514	66	MVWV-M120-5	7TAA292150R0558	67
MONK-M508	7TCA292000R4716	98	MVBV-P167	7TAA292150R0515	75	MVWV-M160-10	7TAA292150R0559	67
MPNK-M160	7TCA292000R4717	98	MVBV-P213	7TAA292150R0516	75	MVWV-M160-5	7TAA292150R0560	67
MPNK-M162	7TCA292000R4718	98	MVBV-P299	7TAA292150R0517	75	MVWV-M162-10	7TAA292150R0561	67
MPNK-M207	7TCA292000R4719	98	MVBV-P366	7TAA292150R0518	75	MVWV-M162-5	7TAA292150R0562	67
MPNK-M253	7TCA292000R4720	98	MVBV-P488	7TAA292150R0519	75	MVWV-M202-10	7TAA292150R0563	67
MPNK-M329	7TCA292000R4721	98	MVEMD-M406/01	7TCA292000R2747	150	MVWV-M202-6	7TAA292150R0564	67
MREIR-U3529	7TCA292000R2699	148	MVEMD-M508/01	7TCA292000R2748	150	MVWV-M207-10	7TAA292150R0565	67
MVAV-M120-10	7TAA292150R0471	65	MVEMD-M6356/01	7TCA292000R2749	150	MVWV-M207-6	7TAA292150R0566	67
MVAV-M120-5	7TAA292150R0472	65	MVEMD-P4856/01	7TCA292000R2750	150	MVWV-M253-11	7TAA292150R0567	67
MVAV-M162-10	7TAA292150R0473	65	MVEMD-RER6	7TCA292000R2751	151	MVWV-M253-7	7TAA292150R0568	67
MVAV-M162-5	7TAA292150R0474	65	MVEMD-RER6/01	7TCA292000R2752	151	MVWV-M329-13	7TAA292150R0569	67
MVAV-M207-10	7TAA292150R0475	65	MVEMD-RER8	7TCA292000R2753	151	MVWV-M329-8	7TAA292150R0570	67
MVAV-M207-6	7TAA292150R0476	65	MVNV-M120-10	7TAA292150R0520	60	MVWV-M406-13	7TAA292150R0571	67
MVAV-M253-11	7TAA292150R0477	65	MVNV-M120-5	7TAA292150R0521	60	MVWV-M406-8	7TAA292150R0572	67
MVAV-M253-7	7TAA292150R0478	65	MVNV-M160-10	7TAA292150R0522	60	MVWV-M508-14	7TAA292150R0573	67
MVAV-M329-13	7TAA292150R0479	65	MVNV-M160-5	7TAA292150R0523	60	MVWV-M508-9	7TAA292150R0574	67
MVAV-M329-8	7TAA292150R0480	65	MVNV-M162-10	7TAA292150R0524	60	MVWV-M638-10	7TAA292150R0575	67
MVAV-M406-13	7TAA292150R0481	65	MVNV-M162-5	7TAA292150R0525	60	MVWV-M638-14	7TAA292150R0576	67
MVAV-M406-8	7TAA292150R0482	65	MVNV-M202-10	7TAA292150R0526	60	MVWV-P090	7TAA292150R0577	76
MVAV-M508-14	7TAA292150R0483	65	MVNV-M202-6	7TAA292150R0527	60	MVWV-P112	7TAA292150R0578	76
MVAV-M508-9	7TAA292150R0484	65	MVNV-M207-10	7TAA292150R0528	60	MVWV-P137	7TAA292150R0579	76
MVAV-M638-10	7TAA292150R0485	65	MVNV-M207-6	7TAA292150R0529	60	MVWV-P167	7TAA292150R0580	76
MVAV-M638-14	7TAA292150R0486	65	MVNV-M253-11	7TAA292150R0530	60	MVWV-P213	7TAA292150R0581	76
MVAV-P090	7TAA292150R0487	75	MVNV-M253-7	7TAA292150R0531	60	MVWV-P299	7TAA292150R0582	76
MVAV-P112	7TAA292150R0488	75	MVNV-M257-11	7TAA292150R0532	60	MVWV-P366	7TAA292150R0583	76
MVAV-P137	7TAA292150R0489	75	MVNV-M257-7	7TAA292150R0533	60	MVWV-P488	7TAA292150R0584	76
MVAV-P167	7TAA292150R0490	75	MVNV-M323-13	7TAA292150R0534	60	NFN3-07	7TAA292800R0000	104
MVAV-P213	7TAA292150R0491	75	MVNV-M323-8	7TAA292150R0535	60	NFN3-09	7TAA292800R0001	104
MVAV-P299	7TAA292150R0492	75	MVNV-M329-13	7TAA292150R0536	60	NFN3-11	7TAA292800R0002	104
MVAV-P366	7TAA292150R0493	75	MVNV-M329-8	7TAA292150R0537	60	NFN3-16	7TAA292800R0003	104
MVAV-P488	7TAA292150R0494	75	MVNV-M406-13	7TAA292150R0538	60	NFN3-21	7TAA292800R0004	104
MVBV-M207-10	7TAA292150R0495	66	MVNV-M406-8	7TAA292150R0539	60	NFN3-29	7TAA292800R0005	104
MVBV-M207-6	7TAA292150R0496	66	MVNV-M409-13	7TAA292150R0540	60	NFN3-36	7TAA292800R0006	104
MVBV-M253-11	7TAA292150R0497	66	MVNV-M409-8	7TAA292150R0541	60	NFN3-48	7TAA292800R0007	104
MVBV-M253-7	7TAA292150R0498	66	MVNV-M506-14	7TAA292150R0542	60	NKAH-M120-10	7TAA292400R0104	46

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NKAH-M160-10	7TAA292400R0105	46	NKNZ-M120R/P		44	NKNZ-M329R/P	7TCA292000R6284	44
NKAH-M162-10	7TAA292400R0106	46	NKNZ-M160/P1	7TAA292400R0156	44	NKNZ-M329R/P-L		45
NKAH-M202-10	7TAA292400R0107	46	NKNZ-M160/P1-L	7TCA292000R7735	45	NKNZ-M406/P1	7TCA292000R5867	44
NKAH-M207-10	7TAA292400R0108	46	NKNZ-M160/P2	7TAA292400R0157	44	NKNZ-M406/P2	7TCA292000R0197	44
NKAH-M253-11	7TAA292400R0109	46	NKNZ-M160/P2-L		45	NKNZ-M406R/P	7TCA292000R6071	44
NKAH-M257-11	7TAA292400R0110	46	NKNZ-M160/P3	7TAA292400R0158	44	NKNZ-M409/P1	7TCA292000R9509	44
NKAH-M323-13	7TAA292400R0111	46	NKNZ-M160/P3-L	7TCA292000R5581	45	NKNZ-M409/P2	7TCA292000R9235	44
NKAH-M329-13	7TAA292400R0112	46	NKNZ-M160R/P	7TCA292000R0183	44	NKNZ-M409/P3	7TCA292000R6028	44
NKAH-M406-13	7TAA292400R0113	46	NKNZ-M160R/P-L		45	NKNZ-M409/P3-L		45
NKAH-M409-13	7TAA292400R0114	46	NKNZ-M202/P1	7TAA292400R0161	44	NKNZ-M409/P4	7TAA292400R0187	44
NKAH-M506-14	7TAA292400R0115	46	NKNZ-M202/P1-L	7TCA292000R0184	45	NKNZ-M409/P4-L	7TCA292000R0198	45
NKAH-M508-14	7TAA292400R0116	46	NKNZ-M202/P3	7TAA292400R0162	44	NKNZ-M409/P5	7TAA292400R0188	44
NKAH-M638-14	7TAA292400R0117	46	NKNZ-M202/P3-L	7TCA292000R7948	45	NKNZ-M409/P5-L	7TCA292000R8009	45
NKBH-M120-10	7TAA292400R0118	46	NKNZ-M202/P4	7TAA292400R0163	44	NKNZ-M409R/P	7TAA292400R0189	44
NKBH-M160-10	7TAA292400R0119	46	NKNZ-M202/P4-L	7TCA292000R8006	45	NKNZ-M409R/P-L	7TCA292000R0199	45
NKBH-M162-10	7TAA292400R0120	46	NKNZ-M202R/P	7TCA292000R0185	44	NKNZ-M506/P1	7TAA292400R0192	44
NKBH-M202-10	7TAA292400R0121	46	NKNZ-M202R/P-L	7TCA292000R7752	45	NKNZ-M506/P1-L		45
NKBH-M207-10	7TAA292400R0122	46	NKNZ-M207/P3	7TAA292400R0165	44	NKNZ-M506/P3	7TAA292400R0193	44
NKBH-M253-11	7TAA292400R0123	46	NKNZ-M207/P3-L	7TCA292000R0186	45	NKNZ-M506/P3-L	7TCA292000R8548	45
NKBH-M257-11	7TAA292400R0124	46	NKNZ-M207/P4	7TAA292400R0166	44	NKNZ-M506R/P	7TCA292000R0200	44
NKBH-M323-13	7TAA292400R0125	46	NKNZ-M207/P4-L		45	NKNZ-M506R/P-L	7TCA292000R0201	45
NKBH-M329-13	7TAA292400R0126	46	NKNZ-M207/P5	7TAA292400R0167	44	NKNZ-M508/P2	7TAA292400R0196	44
NKBH-M406-13	7TAA292400R0127	46	NKNZ-M207/P5-L	7TCA292000R8008	45	NKNZ-M508/P2-L	7TCA292000R8788	45
NKBH-M409-13	7TAA292400R0128	46	NKNZ-M207R/P	7TCA292000R6163	44	NKNZ-M508/P3	7TAA292400R0197	44
NKBH-M506-14	7TAA292400R0129	46	NKNZ-M207R/P-L	7TCA292000R0187	45	NKNZ-M508/P3-L	7TCA292000R9600	45
NKBH-M508-14	7TAA292400R0130	46	NKNZ-M253/P5	7TCA292000R0188	44	NKNZ-M508R/P	7TCA292000R0202	44
NKBH-M638-14	7TAA292400R0131	46	NKNZ-M253/P6	7TCA292000R0189	44	NKNZ-M508R/P-L		45
NKIS-M162	7TAA292400R0132	48	NKNZ-M253R/P	7TCA292000R6152	44	NKNZ-M638/P1	7TAA292400R0200	44
NKIS-M207	7TAA292400R0133	48	NKNZ-M253R1/P	7TCA292000R6288	44	NKNZ-M638/P1-L		45
NKIS-M253	7TAA292400R0134	48	NKNZ-M257/P4	7TCA292000R8813	44	NKNZ-M638/P2	7TAA292400R0201	44
NKIS-M329	7TAA292400R0135	48	NKNZ-M257/P5	7TAA292400R0172	44	NKNZ-M638/P2-L	7TCA292000R8547	45
NKIS-M406	7TAA292400R0136	48	NKNZ-M257/P5-L	7TAA292400R0173	45	NKNZ-M638R/P	7TCA292000R9837	44
NKIS-M508	7TAA292400R0137	48	NKNZ-M257/P6	7TAA292400R0174	44	NKNZ-M638R/P-L	7TCA292000R9838	45
NKIS-M638	7TAA292400R0138	48	NKNZ-M257/P6-L	7TCA292000R0190	45	NSBIV-N027/01	7TCA292000R8950	82
NKNH-M120-10	7TAA292400R0139	43	NKNZ-M257R/P	7TCA292000R0191	44	NSBIV-N043/01	7TCA292000R0471	82
NKNH-M160-10	7TAA292400R0140	43	NKNZ-M257R/P-L	7TCA292000R6630	45	NSBIV-N069/01	7TCA292000R8951	82
NKNH-M162-10	7TAA292400R0141	43	NKNZ-M323/P2	7TCA292000R0192	44	NSBIV-N076/01	7TCA292000R0472	82
NKNH-M202-10	7TAA292400R0142	43	NKNZ-M323/P2-L	7TCA292000R0193	45	NSBIV-N088/01	7TCA292000R0474	82
NKNH-M207-10	7TAA292400R0143	43	NKNZ-M323/P4	7TAA292400R0177	44	NSBIV-N098/01	7TCA292000R0475	82
NKNH-M253-11	7TAA292400R0144	43	NKNZ-M323/P4-L	7TCA292000R0194	45	NSBV-M207-10	7TAA292150R0585	80
NKNH-M257-11	7TAA292400R0145	43	NKNZ-M323/P5	7TAA292400R0178	44	NSBV-M253-11	7TAA292150R0586	80
NKNH-M323-13	7TAA292400R0146	43	NKNZ-M323/P5-L	7TCA292000R9595	45	NSBV-M329-13	7TAA292150R0587	80
NKNH-M329-13	7TAA292400R0147	43	NKNZ-M323R/P	7TAA292400R0179	44	NSBV-M406-13	7TAA292150R0588	80
NKNH-M406-13	7TAA292400R0148	43	NKNZ-M323R/P-L	7TCA292000R8774	45	NSBV-M409-13	7TCA292000R2945	80
NKNH-M409-13	7TAA292400R0149	43	NKNZ-M323R1/P	7TAA292400R0180	44	NSBV-M508-14	7TAA292150R0589	80
NKNH-M506-14	7TAA292400R0150	43	NKNZ-M323R1/P-L	7TCA292000R6197	45	NSBV-M638-14	7TAA292150R0590	80
NKNH-M508-14	7TAA292400R0151	43	NKNZ-M329/P2	7TCA292000R0195	44	NSBV-N027/01	7TCA292000R8940	80
NKNH-M638-14	7TAA292400R0152	43	NKNZ-M329/P2-L	7TCA292000R9446	45	NSBV-N043/01	7TCA292000R8941	80
NKNZ-M120/P1	7TAA292400R0153	44	NKNZ-M329/P3	7TCA292000R6029	44	NSBV-N069/01	7TCA292000R8942	80
NKNZ-M120/P2	7TAA292400R0154	44	NKNZ-M329/P3-L	7TCA292000R9017	45	NSBV-N076/01	7TCA292000R8943	80
NKNZ-M120/P3	7TAA292400R0155	44	NKNZ-M329/P4	7TCA292000R0196	44	NSBV-N088/01	7TCA292000R8944	80

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NSBV-N098/01	7TCA292000R8945	80	NVAV-P137	7TAA292150R0618	75	NVN3-09	7TAA292800R0009	104
NSBV-P167-6.5	7TAA292150R0591	80	NVAV-P167	7TAA292150R0619	75	NVN3-11	7TAA292800R0010	104
NSBV-P213-7	7TAA292150R0592	80	NVAV-P213	7TAA292150R0620	75	NVN3-16	7TAA292800R0011	104
NSBV-P299-8	7TAA292150R0593	80	NVAV-P299	7TAA292150R0621	75	NVN3-21	7TAA292800R0012	104
NSBV-P366-9	7TAA292150R0594	80	NVAV-P366	7TAA292150R0622	75	NVN3-29	7TAA292800R0013	104
NSBV-P488-10	7TAA292150R0595	80	NVAV-P488	7TAA292150R0623	75	NVN3-36	7TAA292800R0014	104
NSNIV-N022/01	7TCA292000R9059	82	NVBV-M207-10	7TAA292150R0624	66	NVN3-48	7TAA292800R0015	104
NSNIV-N027/01	7TCA292000R8946	82	NVBV-M207-6	7TAA292150R0625	66	NVNV-M120-10	7TAA292150R0649	60
NSNIV-N043/01	7TCA292000R9060	82	NVBV-M253-11	7TAA292150R0626	66	NVNV-M120-5	7TAA292150R0650	60
NSNIV-N069/01	7TCA292000R8936	82	NVBV-M253-7	7TAA292150R0627	66	NVNV-M160-10	7TAA292150R0651	60
NSNIV-N076/01	7TCA292000R9061	82	NVBV-M257-11	7TAA292150R0628	66	NVNV-M160-5	7TAA292150R0652	60
NSNIV-N088/01	7TCA292000R9062	82	NVBV-M257-7	7TAA292150R0629	66	NVNV-M162-10	7TAA292150R0653	60
NSNIV-N098/01	7TCA292000R9063	82	NVBV-M323-13	7TAA292150R0630	66	NVNV-M162-5	7TAA292150R0654	60
NSNV-M120-10	7TCA292000R5954	81	NVBV-M323-8	7TAA292150R0631	66	NVNV-M202-10	7TAA292150R0655	60
NSNV-M162-10	7TCA292000R5955	81	NVBV-M329-13	7TAA292150R0632	66	NVNV-M202-6	7TAA292150R0656	60
NSNV-M207-10	7TCA292000R5956	81	NVBV-M329-8	7TAA292150R0633	66	NVNV-M207-10	7TAA292150R0657	60
NSNV-M253-11	7TCA292000R5957	81	NVBV-M406-13	7TAA292150R0634	66	NVNV-M207-6	7TAA292150R0658	60
NSNV-M329-13	7TCA292000R5958	81	NVBV-M406-8	7TAA292150R0635	66	NVNV-M253-11	7TAA292150R0659	60
NSNV-M329-7	7TCA292000R5959	81	NVBV-M409-13	7TAA292150R0636	66	NVNV-M253-7	7TAA292150R0660	60
NSNV-M406-13	7TCA292000R5960	81	NVBV-M409-8	7TAA292150R0637	66	NVNV-M257-11	7TAA292150R0661	60
NSNV-M406-7	7TCA292000R5961	81	NVBV-M506-14	7TAA292150R0638	66	NVNV-M257-7	7TAA292150R0662	60
NSNV-M409-13	7TCA292000R5962	81	NVBV-M506-9	7TAA292150R0639	66	NVNV-M323-13	7TAA292150R0663	60
NSNV-M508-14	7TCA292000R5963	81	NVBV-M508-14	7TAA292150R0640	66	NVNV-M323-8	7TAA292150R0664	60
NSNV-M638-14	7TCA292000R5964	81	NVBV-M508-9	7TAA292150R0641	66	NVNV-M329-13	7TAA292150R0665	60
NSNV-N022/01	7TCA292000R8904	81	NVBV-M638-10	7TAA292150R0642	66	NVNV-M329-8	7TAA292150R0666	60
NSNV-N027/01	7TCA292000R8905	81	NVBV-M638-14	7TAA292150R0643	66	NVNV-M406-13	7TAA292150R0667	60
NSNV-N043/01	7TCA292000R8906	81	NVBV-P167	7TAA292150R0644	75	NVNV-M406-8	7TAA292150R0668	60
NSNV-N069/01	7TCA292000R8907	81	NVBV-P213	7TAA292150R0645	75	NVNV-M409-13	7TAA292150R0669	60
NSNV-N076/01	7TCA292000R8908	81	NVBV-P299	7TAA292150R0646	75	NVNV-M409-8	7TAA292150R0670	60
NSNV-N088/01	7TCA292000R8909	81	NVBV-P366	7TAA292150R0647	75	NVNV-M506-14	7TAA292150R0671	60
NSNV-N098/01	7TCA292000R8910	81	NVBV-P488	7TAA292150R0648	75	NVNV-M506-9	7TAA292150R0672	60
NSWIV-N022/01	7TCA292000R0470	82	NVIR-M120	7TAA292610R0133	84	NVNV-M508-14	7TAA292150R0673	60
NSWV-N022/01	7TCA292000R8939	80	NVIR-M160	7TCA292000R0215	84	NVNV-M508-9	7TAA292150R0674	60
NVAV-M120-10	7TAA292150R0596	65	NVIR-M162	7TAA292610R0134	84	NVNV-M638-10	7TAA292150R0675	60
NVAV-M120-5	7TAA292150R0597	65	NVIR-M207	7TAA292610R0135	84	NVNV-M638-14	7TAA292150R0676	60
NVAV-M162-10	7TAA292150R0598	65	NVIR-M253	7TAA292610R0136	84	NVNV-N022	7TCA292000R8980	61
NVAV-M162-5	7TAA292150R0599	65	NVIR-M329	7TAA292610R0137	84	NVNV-N027	7TCA292000R8981	61
NVAV-M207-10	7TAA292150R0600	65	NVIR-M406	7TAA292610R0138	84	NVNV-N043	7TCA292000R8985	61
NVAV-M207-6	7TAA292150R0601	65	NVIR-M508	7TAA292610R0139	84	NVNV-N069	7TCA292000R8986	61
NVAV-M253-11	7TAA292150R0602	65	NVIR-M638	7TAA292610R0140	84	NVNV-N076	7TCA292000R8982	61
NVAV-M253-7	7TAA292150R0603	65	NVIZR-P07M	7TAA292610R0141	85	NVNV-N088	7TCA292000R8983	61
NVAV-M329-13	7TAA292150R0606	65	NVIZR-P090	7TAA292610R0142	85	NVNV-N098	7TCA292000R8984	61
NVAV-M329-8	7TAA292150R0607	65	NVIZR-P110	7TAA292610R0143	85	NVNV-P090	7TAA292150R0677	73
NVAV-M406-13	7TAA292150R0608	65	NVIZR-P112	7TAA292610R0144	85	NVNV-P112	7TAA292150R0678	73
NVAV-M406-8	7TAA292150R0609	65	NVIZR-P137	7TCA292000R0216	85	NVNV-P137	7TAA292150R0679	73
NVAV-M508-14	7TAA292150R0612	65	NVIZR-P167	7TAA292610R0145	85	NVNV-P167	7TAA292150R0680	73
NVAV-M508-9	7TAA292150R0613	65	NVIZR-P213	7TAA292610R0146	85	NVNV-P213	7TAA292150R0681	73
NVAV-M638-10	7TAA292150R0614	65	NVIZR-P299	7TAA292610R0147	85	NVNV-P293	7TAA292150R0682	73
NVAV-M638-14	7TAA292150R0615	65	NVIZR-P366	7TAA292610R0148	85	NVNV-P299	7TAA292150R0683	73
NVAV-P090	7TAA292150R0616	75	NVIZR-P488	7TAA292610R0149	85	NVNV-P366	7TAA292150R0684	73
NVAV-P112	7TAA292150R0617	75	NVN3-07	7TAA292800R0008	104	NVNV-P488	7TAA292150R0685	73

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NVNZ-M120R/P	7TAA292150R0686	62	NVNZ-M257R/P-L	7TAA292150R0731	64	NVNZ-M506S/B1		63
NVNZ-M120R/P-L		64	NVNZ-M257S/B4		63	NVNZ-M506S/B3		63
NVNZ-M120S/B1		63	NVNZ-M257S/B5	7TCA292000R9794	63	NVNZ-M506S/P1	7TAA292150R0777	62
NVNZ-M120S/B2		63	NVNZ-M257S/B6		63	NVNZ-M506S/P1-L	7TAA292150R0778	64
NVNZ-M120S/B3		63	NVNZ-M257S/P4	7TAA292150R0734	62	NVNZ-M506S/P3	7TAA292150R0779	62
NVNZ-M120S/P1	7TAA292150R0689	62	NVNZ-M257S/P5	7TAA292150R0735	62	NVNZ-M506S/P3-L	7TAA292150R0780	64
NVNZ-M120S/P1-L	7TCA292000R0254	64	NVNZ-M257S/P5-L	7TAA292150R0736	64	NVNZ-M508R/P	7TAA292150R0781	62
NVNZ-M120S/P2	7TAA292150R0690	62	NVNZ-M257S/P6	7TAA292150R0737	62	NVNZ-M508R/P-L	7TAA292150R0782	64
NVNZ-M120S/P3	7TAA292150R0691	62	NVNZ-M257S/P6-L	7TAA292150R0738	64	NVNZ-M508S/B2		63
NVNZ-M120S/P3-L	7TCA292000R0255	64	NVNZ-M323R/P	7TAA292150R0739	62	NVNZ-M508S/B3	7TCA292000R9591	63
NVNZ-M160R/P	7TAA292150R0692	62	NVNZ-M323R/P-L	7TAA292150R0740	64	NVNZ-M508S/P2	7TAA292150R0785	62
NVNZ-M160R/P-L	7TAA292150R0693	64	NVNZ-M323R1/P	7TAA292150R0741	62	NVNZ-M508S/P2-L	7TAA292150R0786	64
NVNZ-M160S/B1		63	NVNZ-M323R1/P-L	7TAA292150R0742	64	NVNZ-M508S/P3	7TAA292150R0787	62
NVNZ-M160S/B2		63	NVNZ-M323S/B4	7TCA292000R9137	63	NVNZ-M508S/P3-L	7TAA292150R0788	64
NVNZ-M160S/B3		63	NVNZ-M323S/B5	7TCA292000R9795	63	NVNZ-M638R/P	7TAA292150R0789	62
NVNZ-M160S/P1	7TAA292150R0696	62	NVNZ-M323S/P4	7TAA292150R0745	62	NVNZ-M638R/P-L	7TAA292150R0790	64
NVNZ-M160S/P1-L	7TAA292150R0697	64	NVNZ-M323S/P4-L	7TAA292150R0746	64	NVNZ-M638S/B1		63
NVNZ-M160S/P2	7TAA292150R0698	62	NVNZ-M323S/P5	7TAA292150R0747	62	NVNZ-M638S/B2		63
NVNZ-M160S/P2-L	7TAA292150R0699	64	NVNZ-M323S/P5-L	7TAA292150R0748	64	NVNZ-M638S/P1	7TAA292150R0793	62
NVNZ-M160S/P3	7TAA292150R0700	62	NVNZ-M329R/P	7TCA292000R0278	62	NVNZ-M638S/P1-L	7TAA292150R0794	64
NVNZ-M160S/P3-L	7TAA292150R0701	64	NVNZ-M329R/P-L	7TAA292150R0749	64	NVNZ-M638S/P2	7TAA292150R0795	62
NVNZ-M202R/P	7TAA292150R0704	62	NVNZ-M329S/B2		63	NVNZ-M638S/P2-L	7TAA292150R0796	64
NVNZ-M202R/P-L	7TAA292150R0705	64	NVNZ-M329S/B3		63	NVNZ-P090R/P	7TAA292150R0803	74
NVNZ-M202S/B1	7TCA292000R9839	63	NVNZ-M329S/B4	7TCA292000R9796	63	NVNZ-P090S/P1	7TCA292000R0296	74
NVNZ-M202S/B3	7TCA292000R9503	63	NVNZ-M329S/P2	7TAA292150R0752	62	NVNZ-P090S/P3	7TAA292150R0806	74
NVNZ-M202S/B4		63	NVNZ-M329S/P2-L	7TAA292150R0753	64	NVNZ-P110R/P	7TAA292150R0809	74
NVNZ-M202S/P1	7TAA292150R0708	62	NVNZ-M329S/P3	7TAA292150R0754	62	NVNZ-P110S/P1	7TAA292150R0812	74
NVNZ-M202S/P1-L	7TAA292150R0709	64	NVNZ-M329S/P3-L	7TAA292150R0755	64	NVNZ-P110S/P3	7TAA292150R0813	74
NVNZ-M202S/P3	7TAA292150R0710	62	NVNZ-M329S/P4	7TAA292150R0756	62	NVNZ-P112R/P	7TAA292150R0816	74
NVNZ-M202S/P3-L	7TAA292150R0711	64	NVNZ-M406R/P	7TAA292150R0757	62	NVNZ-P112S/P1	7TAA292150R0819	74
NVNZ-M202S/P4	7TAA292150R0712	62	NVNZ-M406S/B1		63	NVNZ-P112S/P3	7TAA292150R0820	74
NVNZ-M202S/P4-L	7TAA292150R0713	64	NVNZ-M406S/B2		63	NVNZ-P112S/P4	7TAA292150R0821	74
NVNZ-M207R/P	7TAA292150R0714	62	NVNZ-M406S/P1	7TAA292150R0760	62	NVNZ-P160R/P		74
NVNZ-M207R/P-L	7TAA292150R0715	64	NVNZ-M406S/P2	7TAA292150R0761	62	NVNZ-P160S/P1	7TAA292150R0822	74
NVNZ-M207S/B1	7TCA292000R9315	63	NVNZ-M409R/P	7TAA292150R0762	62	NVNZ-P167R/P	7TAA292150R0825	74
NVNZ-M207S/B2	7TCA292000R9316	63	NVNZ-M409R/P-L	7TAA292150R0763	64	NVNZ-P167S/P3	7TAA292150R0828	74
NVNZ-M207S/B3	7TCA292000R9317	63	NVNZ-M409S/B1		63	NVNZ-P167S/P4	7TAA292150R0829	74
NVNZ-M207S/B4	7TCA292000R9318	63	NVNZ-M409S/B2		63	NVNZ-P167S/P5	7TAA292150R0830	74
NVNZ-M207S/B5	7TCA292000R9319	63	NVNZ-M409S/B3		63	NVNZ-P167S/P6	7TAA292150R0831	74
NVNZ-M207S/P3	7TAA292150R0718	62	NVNZ-M409S/B4		63	NVNZ-P213R/P	7TAA292150R0834	74
NVNZ-M207S/P3-L	7TAA292150R0719	64	NVNZ-M409S/B5		63	NVNZ-P213R1/P	7TAA292150R0836	74
NVNZ-M207S/P4	7TAA292150R0720	62	NVNZ-M409S/P1	7TAA292150R0766	62	NVNZ-P213S/P1	7TCA292000R0301	74
NVNZ-M207S/P4-L	7TAA292150R0721	64	NVNZ-M409S/P2	7TAA292150R0767	62	NVNZ-P213S/P4	7TAA292150R0839	74
NVNZ-M207S/P5	7TAA292150R0722	62	NVNZ-M409S/P3	7TCA292000R0288	62	NVNZ-P213S/P5	7TAA292150R0840	74
NVNZ-M207S/P5-L	7TAA292150R0723	64	NVNZ-M409S/P3-L	7TAA292150R0768	64	NVNZ-P299R/P	7TAA292150R0843	74
NVNZ-M253R/P	7TAA292150R0724	62	NVNZ-M409S/P4	7TAA292150R0769	62	NVNZ-P299S/P3	7TAA292150R0846	74
NVNZ-M253S/B5		63	NVNZ-M409S/P4-L	7TAA292150R0770	64	NVNZ-P299S/P4	7TAA292150R0847	74
NVNZ-M253S/B6		63	NVNZ-M409S/P5	7TAA292150R0771	62	NVNZ-P299S/P5	7TAA292150R0848	74
NVNZ-M253S/P5	7TAA292150R0728	62	NVNZ-M409S/P5-L	7TAA292150R0772	64	NVNZ-P366R/P	7TAA292150R0851	74
NVNZ-M253S/P6	7TAA292150R0729	62	NVNZ-M506R/P	7TAA292150R0773	62	NVNZ-P366S/P1	7TAA292150R0854	74
NVNZ-M257R/P	7TAA292150R0730	62	NVNZ-M506R/P-L	7TAA292150R0774	64	NVNZ-P366S/P2	7TAA292150R0855	74

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
NVNZ-P366S/P3	7TAA292150R0856	74	OVN2-12	7TAA292700R0044	103	PCSG-23B	7TAA292240R0096	19
NVNZ-P488R/P	7TAA292150R0859	74	OVN2-17	7TAA292700R0045	103	PCSG-23S	7TAA292240R0098	19
NVNZ-P488S/P1	7TAA292150R0862	74	OVN2-23	7TAA292700R0046	103	PCSG-29B	7TAA292240R0099	19
NVNZ-P488S/P2	7TAA292150R0863	74	OVN2-29	7TAA292700R0047	103	PCSG-29S	7TAA292240R0100	19
NVWV-M120-10	7TAA292150R0864	67	OVN2-36	7TAA292700R0048	103	PCSG-36B	7TAA292240R0101	19
NVWV-M120-5	7TAA292150R0865	67	OVN2-48	7TAA292700R0049	103	PCSG-36S	7TAA292240R0102	19
NVWV-M160-10	7TAA292150R0866	67	PACOF-07B	7TAA292730R0000	33,130	PCSG-48B	7TAA292240R0103	19
NVWV-M160-5	7TAA292150R0867	67	PACOF-10B	7TAA292730R0001	33,130	PCSG-48S	7TAA292240R0104	19
NVWV-M162-10	7TAA292150R0868	67	PACOF-12B	7TAA292730R0002	33,130	PCSG-56B	7TAA292360R0025	19,122
NVWV-M162-5	7TAA292150R0869	67	PACOF-17B	7TAA292730R0004	33,130	PCSG-56S	7TAA292360R0026	19,122
NVWV-M202-10	7TAA292150R0870	67	PACOF-23B	7TAA292730R0006	33,130	PCSG-70B	7TAA292360R0027	19,122
NVWV-M202-6	7TAA292150R0871	67	PACOF-29B	7TAA292730R0008	33,130	PCSG-70S	7TCA292000R0303	19,122
NVWV-M207-10	7TAA292150R0872	67	PACOF-36B	7TAA292730R0009	33,130	PCSG-95B	7TAA292360R0029	19,122
NVWV-M207-6	7TAA292150R0873	67	PACOF-48B	7TAA292730R0010	33,130	PCSG-95S	7TAA292360R0030	19,122
NVWV-M253-11	7TAA292150R0874	67	PACOF-70B	7TAA292730R0011	33,130	PCSLG-17B	7TAA292240R0105	19
NVWV-M253-7	7TAA292150R0875	67	PCLG-125B	7TAA292360R0011	18,122	PCSLG-17S	7TCA292000R5792	19
NVWV-M329-13	7TAA292150R0876	67	PCLG-125S	7TAA292360R0012	18,122	PCSLG-23B	7TAA292240R0106	19
NVWV-M329-8	7TAA292150R0877	67	PCLG-17B	7TAA292240R0059	18	PCSLG-23S	7TCA292000R5793	19
NVWV-M406-13	7TAA292150R0878	67	PCLG-17S	7TAA292240R0060	18	PCSLG-29B	7TAA292240R0107	19
NVWV-M406-8	7TAA292150R0879	67	PCLG-23B	7TAA292240R0062	18	PCSLG-29S	7TCA292000R5794	19
NVWV-M508-14	7TAA292150R0880	67	PCLG-23S	7TAA292240R0063	18	PCSLG-36B	7TAA292240R0108	19
NVWV-M508-9	7TAA292150R0881	67	PCLG-29B	7TAA292240R0065	18	PCSLG-36S	7TCA292000R5795	19
NVWV-M638-10	7TAA292150R0882	67	PCLG-29S	7TAA292240R0066	18	PCSLG-48B	7TAA292240R0109	19
NVWV-M638-14	7TAA292150R0883	67	PCLG-36B	7TAA292240R0069	18	PCSLG-48S	7TCA292000R5796	19
NVWV-P090	7TAA292150R0884	76	PCLG-36S	7TAA292240R0071	18	PCSLT-07B	7TAA292240R0110	19
NVWV-P112	7TAA292150R0885	76	PCLG-48B	7TAA292240R0073	18	PCSLT-07S	7TCA292000R5797	19
NVWV-P137	7TAA292150R0886	76	PCLG-48S	7TAA292240R0075	18	PCSLT-10B	7TAA292240R0111	19
NVWV-P167	7TAA292150R0887	76	PCLG-56B	7TAA292360R0013	18,122	PCSLT-10S	7TCA292000R5798	19
NVWV-P213	7TAA292150R0888	76	PCLG-56S	7TAA292360R0015	18,122	PCSLT-12B	7TAA292240R0112	19
NVWV-P299	7TAA292150R0889	76	PCLG-70B	7TAA292360R0017	18,122	PCSLT-12S	7TCA292000R5799	19
NVWV-P366	7TAA292150R0890	76	PCLG-70S	7TAA292360R0019	18,122	PCSLT-17B	7TAA292240R0113	19
NVWV-P488	7TAA292150R0891	76	PCLG-95B	7TAA292360R0021	18,122	PCSLT-17S	7TCA292000R5800	19
NVWZ-M160R/P	7TAA292150R0892	68	PCLG-95S	7TAA292360R0023	18,122	PCST-07B	7TAA292240R0115	19
NVWZ-M160S/P1	7TAA292150R0893	68	PCLT-07B	7TAA292240R0076	18	PCST-07S	7TAA292240R0116	19
NVWZ-M160S/P2	7TAA292150R0894	68	PCLT-07S	7TAA292240R0077	18	PCST-10B	7TAA292240R0117	19
NVWZ-M160S/P3	7TAA292150R0895	68	PCLT-10B	7TAA292240R0078	18	PCST-10S	7TAA292240R0118	19
NVWZ-M202R/P	7TAA292150R0896	68	PCLT-10S	7TAA292240R0079	18	PCST-12B	7TAA292240R0119	19
NVWZ-M202S/P1	7TAA292150R0897	68	PCLT-12B	7TAA292240R0080	18	PCST-12S	7TAA292240R0120	19
NVWZ-M202S/P3	7TAA292150R0898	68	PCLT-12S	7TAA292240R0081	18	PCST-17B	7TAA292240R0121	19
NVWZ-M202S/P4	7TAA292150R0899	68	PCLT-17B	7TAA292240R0083	18	PCST-17S	7TAA292240R0122	19
NVWZ-M207R/P	7TAA292150R0900	68	PCLT-17S	7TAA292240R0085	18	PELT-10S	7TAA292240R0123	20
NVWZ-M207S/P1	7TCA292000R3285	68	PCLT-23B	7TAA292240R0086	18	PELT-10SL	7TAA292240R0124	20
NVWZ-M207S/P3	7TAA292150R0901	68	PCLT-23S	7TAA292240R0088	18	PELT-12S	7TAA292240R0125	20
NVWZ-M207S/P4	7TAA292150R0902	68	PCLT-29B	7TAA292240R0089	18	PELT-12SL	7TAA292240R0126	20
NVWZ-M207S/P5	7TAA292150R0903	68	PCLT-29S	7TAA292240R0091	18	PELT-17S	7TAA292240R0127	20
NVWZ-M257R/P	7TAA292150R0904	68	PCLT-36B	7TAA292240R0092	18	PELT-17SL	7TAA292240R0128	20
NVWZ-M257S/P5	7TAA292150R0905	68	PCLT-36S	7TCA292000R3533	18	PELT-23S	7TAA292240R0131	20
NVWZ-M257S/P6	7TAA292150R0906	68	PCLT-48B	7TCA292000R3535	18	PELT-23SL	7TAA292240R0132	20
NVWZ-M323S/P4	7TCA292000R3286	68	PCLT-48S	7TCA292000R3536	18	PELT-29S	7TAA292240R0133	20
OVN2-07	7TAA292700R0042	103	PCSG-17B	7TAA292240R0093	19	PELT-29SL	7TAA292240R0134	20
OVN2-10	7TAA292700R0043	103	PCSG-17S	7TAA292240R0094	19	PELT-36S	7TAA292240R0135	20

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
PELT-36SL	7TAA292240R0136	20	PLRG-29B	7TCA292000R6233	24	PPCOF-36B	7TAA292730R0021	33,130
PELT-48S	7TAA292240R0137	20	PLRG-29S	7TCA292000R6261	24	PPCOF-48B	7TAA292730R0022	33,130
PELT-48SL	7TAA292240R0138	20	PLRG-36B	7TCA292000R6234	24	PPCOF-70B	7TAA292730R0023	33,130
PHTG-17B	7TAA292430R0000	15	PLRG-36S	7TCA292000R6262	24	PSXG-23B	7TAA292430R0032	16
PHTG-23B	7TAA292430R0001	15	PLRG-48B	7TCA292000R6235	24	PSXG-29B	7TAA292430R0033	16
PHTG-29B	7TAA292430R0002	15	PLRG-48S	7TCA292000R6263	24	PSXG-36B	7TAA292430R0034	16
PHTG-36B	7TAA292430R0003	15	PLRT-07B	7TCA292000R6236	24	PSXG-48B	7TAA292430R0035	16
PHTG-48B	7TAA292430R0004	15	PLRT-07S	7TCA292000R6264	24	PSXT-10B	7TAA292430R0036	16
PHTT-07B	7TAA292430R0005	15	PLRT-10B	7TCA292000R6237	24	PSXT-12B	7TAA292430R0037	16
PHTT-10B	7TAA292430R0006	15	PLRT-10S	7TCA292000R6265	24	PSXT-17B	7TCA292000R0305	16
PHTT-12B	7TAA292430R0007	15	PLRT-12B	7TCA292000R6238	24	PUEG-56B	7TAA292360R0043	21,122
PHTT-17B	7TAA292430R0008	15	PLRT-12S	7TCA292000R6266	24	PUEG-70B	7TAA292360R0044	21,122
PHTT-23B	7TAA292430R0009	15	PMACUT-38	7TAA292880R0006	117	PUET-23B	7TAA292900R0004	21
PIHG-125B	7TAA292360R0031	20,122	PMACUT-52	7TAA292880R0007	117	PUET-29B	7TAA292900R0005	21
PIHG-125S	7TAA292360R0032	20,122	PMACUT-NW125	7TAA292880R0011	117	PUET-36B	7TAA292900R0006	21
PIHG-56B	7TAA292360R0033	20,122	PMACUT-NW56	7TAA292880R0008	117	PUET-48B	7TAA292900R0007	21
PIHG-56S	7TAA292360R0034	20,122	PMACUT-NW70	7TAA292880R0009	117	PUSG-17B	7TAA292490R0006	31
PIHG-70B	7TAA292360R0036	20,122	PMACUT-NW95	7TAA292880R0010	117	PUSG-17S		31
PIHG-70S	7TAA292360R0038	20,122	PMA-Tie-tool	7TCA292000R3742	149	PUSG-23B	7TAA292490R0007	31
PIHG-95B	7TAA292360R0040	20,122	POHG-17B	7TAA292430R0017	15	PUSG-23S		31
PIHG-95S	7TAA292360R0042	20,122	POHG-17S	7TAA292430R0018	15	PUSG-29B	7TAA292490R0008	31
PISG-17B	7TAA292240R0139	20	POHG-23B	7TAA292430R0019	15	PUSG-29S		31
PISG-17S	7TAA292240R0140	20	POHG-23S	7TAA292430R0020	15	PUSG-36B	7TAA292490R0009	31
PISG-23B	7TAA292240R0142	20	POHG-29B	7TAA292430R0021	15	PUSG-36S		31
PISG-23S	7TAA292240R0143	20	POHG-29S	7TAA292430R0022	15	PUSG-48B	7TAA292490R0010	31
PISG-29B	7TAA292240R0144	20	POHG-36B	7TAA292430R0023	15	PUSG-48S		31
PISG-29S	7TAA292240R0145	20	POHG-36S	7TAA292430R0024	15	PVDT-10P	7TAA292240R0178	22
PISG-36B	7TAA292240R0147	20	POHG-48B	7TAA292430R0025	15	PVDT-12P	7TAA292240R0179	22
PISG-36S	7TAA292240R0149	20	POHG-48S	7TAA292430R0026	15	PVDT-17P	7TAA292240R0180	22
PISG-48B	7TAA292240R0151	20	POHT-10B	7TAA292430R0027	15	PVDT-23P	7TAA292240R0181	22
PISG-48S	7TAA292240R0152	20	POHT-10S	7TAA292430R0028	15	PVDT-29P	7TCA292000R3817	22
PIST-07B	7TAA292240R0153	20	POHT-12B	7TAA292430R0029	15	RKS-07	7TAA292150R0907	115
PIST-07S	7TAA292240R0154	20	POHT-12S	7TAA292430R0030	15	RKS-10	7TAA292150R0908	115
PIST-10B	7TAA292240R0155	20	POSG-29B	7TCA292000R5823	21	RKS-12	7TAA292150R0909	115
PIST-10S	7TAA292240R0156	20	POSG-36B	7TCA292000R3749	21	RKS-17	7TAA292150R0910	115
PIST-12B	7TAA292240R0157	20	POSG-48B	7TCA292000R3750	21	RKS-23	7TAA292150R0911	115
PIST-12S	7TAA292240R0158	20	POSG-70B	7TAA292900R0008	21	RKS-29	7TAA292150R0912	115
PIST-17B	7TAA292240R0160	20	POSG-95B	7TCA292000R0304	21	RKS-36	7TAA292150R0913	115
PIST-17S	7TAA292240R0161	20	POST-10B	7TAA292240R0171	21	RKS-48	7TAA292150R0914	115
PIST-23B	7TAA292240R0163	20	POST-12B	7TAA292240R0172	21	RKS-56	7TAA292150R0915	115
PIST-23S	7TAA292240R0164	20	POST-17B	7TAA292240R0173	21	SCA-M16-10	7TAA292630R0000	119
PIST-29B	7TAA292240R0165	20	POST-23B	7TAA292240R0174	21	SCA-M20-10	7TAA292630R0001	119
PIST-29S	7TAA292240R0166	20	POST-29B	7TAA292240R0175	21	SCA-M25-11	7TAA292630R0002	119
PIST-36B	7TAA292240R0167	20	POST-36B	7TAA292240R0176	21	SCA-M32-13	7TAA292630R0003	119
PIST-36S	7TAA292240R0168	20	POST-48B	7TAA292240R0177	21	SCA-M40-13	7TAA292630R0004	119
PIST-48B	7TAA292240R0169	20	PPCOF-07B	7TAA292730R0012	33,130	SCA-M50-14	7TAA292630R0005	119
PIST-48S	7TAA292240R0170	20	PPCOF-10B	7TAA292730R0013	33,130	SCA-M63-14	7TAA292630R0006	119
PLRG-17B	7TCA292000R6231	24	PPCOF-12B	7TAA292730R0014	33,130	SCA-P09	7TAA292630R0007	119
PLRG-17S	7TCA292000R6259	24	PPCOF-17B	7TAA292730R0016	33,130	SCA-P11	7TAA292630R0008	119
PLRG-23B	7TCA292000R6232	24	PPCOF-23B	7TAA292730R0018	33,130	SCA-P16	7TAA292630R0009	119
PLRG-23S	7TCA292000R6260	24	PPCOF-29B	7TAA292730R0020	33,130	SCA-P21	7TAA292630R0010	119

## Index

Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
SCA-P29	7TAA292630R0011	119	SGS-48	7TAA292720R0062	113,126	SLND-P299	7TAA292000R0145	140
SCA-P36	7TAA292630R0012	119	SGS-56	7TAA292720R0063	113,126	SLND-P366	7TAA292000R0146	140
SCA-P48	7TAA292630R0013	119	SGS-70	7TAA292720R0064	113,126	SLND-P488	7TAA292000R0147	140
SFH-07-0	7TAA292700R0050	111	SGS-95	7TAA292720R0065	113,126	SLWD-M120	7TAA292000R0148	140
SFH-10-0	7TAA292700R0051	111	SLAD-M120	7TAA292000R0098	139	SLWD-M160	7TAA292000R0149	140
SFH-12-0	7TAA292700R0052	111	SLAD-M160	7TAA292000R0099	139	SLWD-M162	7TAA292000R0150	140
SFH-17-0	7TAA292700R0053	111	SLAD-M162	7TAA292000R0100	139	SLWD-M202	7TAA292000R0151	140
SFH-23-0	7TAA292700R0054	111	SLAD-M202	7TAA292000R0101	139	SLWD-M207	7TAA292000R0152	140
SFH-29-0	7TAA292700R0055	111	SLAD-M207	7TAA292000R0102	139	SLWD-M253	7TAA292000R0153	140
SFH-36-0	7TAA292700R0056	111	SLAD-M253	7TAA292000R0103	139	SLWD-M257	7TAA292000R0154	140
SFH-48-0	7TAA292700R0057	111	SLAD-M257	7TAA292000R0104	139	SLWD-M323	7TAA292000R0155	140
SFHS-00	7TAA292700R0058	111	SLAD-M323	7TAA292000R0105	139	SLWD-M329	7TAA292000R0156	140
SFHS-PH	7TAA292700R0060	111	SLAD-M329	7TAA292000R0106	139	SLWD-M406	7TAA292000R0157	140
SFHS-PH1	7TAA292700R0061	111	SLAD-M406	7TAA292000R0107	139	SLWD-M409	7TAA292000R0158	140
SGB-07	7TAA292720R0027	113	SLAD-M409	7TAA292000R0108	139	SLWD-M506	7TAA292000R0159	140
SGB-09	7TAA292720R0029	113	SLAD-M506	7TAA292000R0109	139	SLWD-M508	7TAA292000R0160	140
SGB-11	7TAA292720R0031	113	SLAD-M508	7TAA292000R0110	139	SLWD-M638	7TAA292000R0161	140
SGB-16	7TAA292720R0036	113	SLAD-M638	7TAA292000R0111	139	SLWD-P070	7TAA292000R0162	141
SGB-21	7TAA292720R0039	113	SLAD-P090	7TAA292000R0112	141	SLWD-P090	7TAA292000R0163	141
SGB-29	7TAA292720R0043	113	SLAD-P112	7TAA292000R0113	141	SLWD-P092	7TAA292000R0164	141
SGB-36	7TAA292720R0044	113	SLAD-P132	7TAA292000R0114	141	SLWD-P110	7TAA292000R0165	141
SGB-48	7TAA292720R0046	113	SLAD-P137	7TAA292000R0115	141	SLWD-P112	7TAA292000R0166	141
SGG-125	7TAA292860R0033	123	SLAD-P167	7TAA292000R0116	141	SLWD-P130	7TAA292000R0167	141
SGG-56	7TAA292860R0034	123	SLAD-P213	7TAA292000R0117	141	SLWD-P132	7TAA292000R0168	141
SGG-70	7TAA292860R0035	123	SLAD-P299	7TAA292000R0118	141	SLWD-P137	7TCA292000R4141	141
SGG-95	7TAA292860R0036	123	SLAD-P366	7TAA292000R0119	141	SLWD-P167	7TAA292000R0169	141
SGG-M6356	7TCA292000R4106	125	SLAD-P488	7TAA292000R0120	141	SLWD-P213	7TAA292000R0170	141
SGG-P3656	7TCA292000R4107	125	SLND-M120	7TAA292000R0121	139	SLWD-P299	7TAA292000R0171	141
SGH-23	7TAA292720R0047	112	SLND-M160	7TAA292000R0122	139	SLWD-P366	7TAA292000R0172	141
SGH-29	7TAA292720R0048	112	SLND-M162	7TAA292000R0123	139	SLWD-P488	7TAA292000R0173	141
SGH-36	7TAA292720R0049	112	SLND-M200	7TAA292000R0124	139	SRER-06	7TAA292920R0008	144
SGH-48	7TAA292720R0050	112	SLND-M202	7TAA292000R0125	139	SRER-16	7TAA292920R0009	144
SGH-56	7TAA292720R0051	112,126	SLND-M207	7TAA292000R0126	139	SRER-21	7TAA292920R0010	144
SGH-70	7TAA292720R0052	112,126	SLND-M253	7TAA292000R0127	139	SRER-29	7TAA292920R0011	144
SGH-95	7TAA292720R0053	112,126	SLND-M257	7TAA292000R0128	139	SRER-50	7TAA292920R0012	144
SGI-M7556	7TCA292000R4118	112	SLND-M323	7TAA292000R0129	139	SREV-40	7TAA292920R0013	144
SGL-07	7TAA292720R0054	112	SLND-M329	7TAA292000R0130	139	SVN4-07	7TAA292640R0000	102
SGL-10	7TAA292720R0055	112	SLND-M406	7TAA292000R0131	139	SVN4-09	7TAA292640R0001	102
SGL-12	7TAA292720R0056	112	SLND-M409	7TAA292000R0132	139	SVN4-11	7TAA292640R0002	102
SGL-17	7TAA292720R0057	112	SLND-M506	7TAA292000R0133	139	SVN4-13	7TAA292640R0003	102
SGL-23	7TAA292720R0058	112	SLND-M508	7TAA292000R0134	139	SVN4-16	7TAA292640R0004	102
SGL-29	7TAA292720R0059	112	SLND-M638	7TAA292000R0135	139	SVN4-21	7TAA292640R0005	102
SGO3-125	7TAA292980R0000	127	SLND-P070	7TAA292000R0136	140	SVN4-29	7TAA292640R0006	102
SGO3-56	7TAA292980R0001	127	SLND-P090	7TAA292000R0137	140	SVN4-36	7TAA292640R0007	102
SGO3-70	7TAA292980R0002	127	SLND-P092	7TAA292000R0138	140	SVN4-42	7TAA292640R0008	102
SGO3-95	7TAA292980R0003	127	SLND-P110	7TAA292000R0139	140	SVN4-48	7TAA292640R0009	102
SGO-56	7TAA292860R0037	123	SLND-P112	7TAA292000R0140	140	SVN4-G00	7TAA292640R0010	102
SGO-70	7TAA292860R0038	123	SLND-P132	7TAA292000R0141	140	SVN4-G01	7TAA292640R0011	102
SGO-95	7TAA292860R0039	123	SLND-P137	7TAA292000R0142	140	SVN4-G02	7TAA292640R0012	102
SGS-125	7TAA292720R0060	113,126	SLND-P167	7TAA292000R0143	140	SVN4-G04	7TAA292640R0013	102
SGS-36	7TAA292720R0061	113,126	SLND-P213	7TAA292000R0144	140	SVN4-G06	7TAA292640R0014	102

## Index

### Products in alphabetical order

Part. no.	GID no.	Page	Part. no.	GID no.	Page	Part. no.	GID no.	Page
SVN4-G07	7TAA292640R0015	102	VAMLG-29B	7TAA292240R0209	23	VOHG-125S	7TAA292360R0061	24,122
SVN4-G08	7TAA292640R0016	102	VAMLG-29S	7TAA292240R0210	23	VOHG-17B	7TAA292240R0255	24
SVN4-G09	7TAA292640R0017	102	VAMLG-36B	7TAA292240R0211	23	VOHG-17S	7TAA292240R0257	24
SVN4-M12	7TAA292640R0018	102	VAMLG-36S	7TAA292240R0212	23	VOHG-23B	7TAA292240R0259	24
SVN4-M12/02	7TAA292640R0019	102	VAMLG-48B	7TAA292240R0213	23	VOHG-23S	7TAA292240R0261	24
SVN4-M16	7TAA292640R0020	102	VAMLG-48S	7TAA292240R0214	23	VOHG-29B	7TAA292240R0263	24
SVN4-M16/02	7TAA292640R0021	102	VAMLG-56B	7TAA292360R0048	23	VOHG-29S	7TAA292240R0265	24
SVN4-M20	7TAA292640R0022	102	VAMLG-56S	7TAA292360R0049	23	VOHG-36B	7TAA292240R0266	24
SVN4-M20/02	7TAA292640R0023	102	VAMLG-70B	7TAA292360R0050	23	VOHG-36S	7TAA292240R0267	24
SVN4-M25	7TAA292640R0024	102	VAMLG-70S	7TAA292360R0051	23	VOHG-48B	7TAA292240R0269	24
SVN4-M25/01	7TCA292000R4288	102	VAMLG-95B	7TAA292360R0052	23	VOHG-48S	7TAA292240R0271	24
SVN4-M25/02	7TAA292640R0025	102	VAMLG-95S	7TAA292360R0053	23	VOHG-56B	7TAA292360R0062	24,122
SVN4-M32	7TAA292640R0026	102	VAMLT-10B	7TAA292240R0217	23	VOHG-56S	7TAA292360R0063	24,122
SVN4-M32/02	7TAA292640R0027	102	VAMLT-10S	7TAA292240R0218	23	VOHG-70B	7TAA292360R0064	24,122
SVN4-M40	7TAA292640R0028	102	VAMLT-12B	7TAA292240R0219	23	VOHG-70S	7TAA292360R0065	24,122
SVN4-M40/01	7TCA292000R4289	102	VAMLT-12S	7TAA292240R0220	23	VOHG-95B	7TAA292360R0066	24,122
SVN4-M40/02	7TAA292640R0029	102	VAMT-10B	7TAA292240R0223	22	VOHG-95S	7TAA292360R0067	24,122
SVN4-M50	7TAA292640R0030	102	VAMT-10S	7TAA292240R0224	22	VUSG-17B	7TAA292490R0011	32
SVN4-M50/01	7TCA292000R4290	102	VAMT-12B	7TAA292240R0225	22	VUSG-17S		32
SVN4-M50/02	7TAA292640R0031	102	VAMT-12S	7TAA292240R0226	22	VUSG-23B	7TAA292490R0012	32
SVN4-M63	7TAA292640R0032	102	VCSG-17B	7TAA292240R0230	23	VUSG-23S		32
SWA-M16-10	7TAA292590R0000	119	VCSG-17S	7TAA292240R0231	23	VUSG-29B	7TAA292490R0013	32
SWA-M20-10	7TAA292590R0001	119	VCSG-23B	7TAA292240R0232	23	VUSG-29S		32
SWA-M25-11	7TAA292590R0002	119	VCSG-23S	7TAA292240R0233	23	VUSG-36B	7TAA292490R0014	32
SWA-M32-13	7TAA292590R0003	119	VCSG-29B	7TAA292240R0234	23	VUSG-36S		32
SWA-M40-13	7TAA292590R0004	119	VCSG-29S	7TAA292240R0235	23	VUSG-48B	7TAA292490R0015	32
SWA-M50-14	7TAA292590R0005	119	VCSG-36B	7TAA292240R0236	23	VUSG-48S		32
SWA-M63-14	7TAA292590R0006	119	VCSG-36S	7TAA292240R0237	23	WPS-NW10	7TAA292650R0000	103
SWA-P09	7TAA292590R0007	119	VCSG-48B	7TAA292240R0238	23	WPS-NW12	7TAA292650R0001	103
SWA-P11	7TAA292590R0008	119	VCSG-48S	7TAA292240R0239	23	WPS-NW17	7TAA292650R0002	103
SWA-P16	7TAA292590R0009	119	VCSG-56B	7TAA292360R0054	23,122	WPS-NW23	7TAA292650R0003	103
SWA-P21	7TAA292590R0010	119	VCSG-56S	7TAA292360R0055	23,122	WPS-NW29	7TAA292650R0004	103
SWA-P29	7TAA292590R0011	119	VCSG-70B	7TAA292360R0056	23,122	WPS-NW36	7TAA292650R0005	103
SWA-P36	7TAA292590R0012	119	VCSG-70S	7TAA292360R0057	23,122	WPS-NW48	7TAA292650R0006	103
SWA-P48	7TAA292590R0013	119	VCSG-95B	7TAA292360R0058	23,122	XPCLG-17BB	7TAA292240R0290	25
VAMG-17B	7TAA292240R0195	22	VCSG-95S	7TAA292360R0059	23,122	XPCLG-17SB	7TAA292240R0291	25
VAMG-17S	7TAA292240R0196	22	VCST-07B	7TAA292240R0240	23	XPCLG-23BB	7TAA292240R0292	25
VAMG-23B	7TAA292240R0197	22	VCST-07S	7TAA292240R0241	23	XPCLG-23SB	7TAA292240R0293	25
VAMG-23S	7TAA292240R0198	22	VCST-10B	7TAA292240R0242	23	XPCLG-29BB	7TAA292240R0294	25
VAMG-29B	7TAA292240R0199	22	VCST-10S	7TAA292240R0243	23	XPCLG-29SB	7TAA292240R0295	25
VAMG-29S	7TAA292240R0200	22	VCST-12B	7TAA292240R0244	23	XPCLG-36BB	7TAA292240R0296	25
VAMG-36B	7TAA292240R0201	22	VCST-12S	7TAA292240R0245	23	XPCLG-36SB	7TAA292240R0297	25
VAMG-36S	7TAA292240R0202	22	VCST-17B	7TAA292240R0246	23	XPCLG-48BB	7TAA292240R0298	25
VAMG-48B	7TAA292240R0203	22	VCST-17S	7TAA292240R0247	23	XPCLG-48SB	7TAA292240R0299	25
VAMG-48S	7TAA292240R0204	22	VOHD-07B	7TAA292240R0248	24	XPCLT-10BB	7TCA292000R0334	25
VAMLG-125B	7TAA292360R0046	23	VOHD-07S	7TAA292240R0249	24	XPCLT-10SB	7TCA292000R9338	25
VAMLG-125S	7TAA292360R0047	23	VOHD-10B	7TAA292240R0250	24	XPCLT-12BB	7TAA292240R0300	25
VAMLG-17B	7TAA292240R0205	23	VOHD-10S	7TAA292240R0251	24	XPCLT-12SB	7TAA292240R0301	25
VAMLG-17S	7TAA292240R0206	23	VOHD-12B	7TAA292240R0252	24	XPCLT-17BB	7TAA292240R0302	25
VAMLG-23B	7TAA292240R0207	23	VOHD-12S	7TAA292240R0253	24	XPCLT-17SB		25
VAMLG-23S	7TAA292240R0208	23	VOHG-125B	7TAA292360R0060	24,122	XPESFG-17BO	7TCA292000R8726	28

## Index

Products in alphabetical order

Part. no.	GID no.	Page
XPCCFG-23BO	7TCA292000R8802	28
XPCCFG-29BO	7TCA292000R8803	28
XPCCFG-36BO	7TCA292000R8804	28
XPCCFG-48BO	7TCA292000R8805	28
XPCSFT-07BO	7TCA292000R9467	28
XPCSFT-10BO	7TCA292000R8799	28
XPCSFT-12BO	7TCA292000R8801	28
XPCSG-17BG	7TCA292000R8829	27
XPCSG-23BG	7TCA292000R8831	27
XPCSG-29BG	7TCA292000R8832	27
XPCSG-36BG	7TCA292000R8834	27
XPCSG-48BG	7TCA292000R8835	27
XPCSG-56BG		27
XPCSG-70BG		27
XPCST-10BG	7TCA292000R8827	27
XPCST-12BG	7TCA292000R8828	27
XSOLG-17BG	7TAA292240R0303	25
XSOLG-23BG	7TAA292240R0304	25
XSOLG-29BG	7TAA292240R0305	25
XSOLG-36BG	7TAA292240R0306	25
XSOLG-48BG	7TAA292240R0307	25
XSOLT-10BG	7TCA292000R0335	25
XSOLT-12BG	7TAA292240R0314	25
XVCS1H-10BG	7TCA292000R5547	26
XVCS1H-12BG	7TAA292240R0315	26
XVCS1H-17BG	7TAA292240R0316	26
XVCS1H-23BG	7TAA292240R0317	26
XVCS1H-29BG	7TAA292240R0318	26
XVCS1H-36BG	7TAA292240R0319	26
XVCS1H-48BG	7TAA292240R0320	26
XVCS2H-10BG		26
XVCS2H-12BG	7TCA292000R4679	26
XVCS2H-17BG	7TCA292000R4681	26
XVCS2H-23BG	7TCA292000R4682	26
XVCS2H-29BG	7TCA292000R4683	26
XVCS2H-36BG	7TCA292000R4684	26
XVCS2H-48BG	7TCA292000R4685	26
XVCSFG-17BB	7TCA292000R9748	27
XVCSFG-23BB	7TCA292000R9750	27
XVCSFG-29BB	7TCA292000R9751	27
XVCSFG-36BB	7TCA292000R9752	27
XVCSFG-48BB	7TCA292000R9753	27
XVCSFT-10BB	7TCA292000R9746	27
XVCSFT-12BB	7TCA292000R9747	27
xxxG-17x/S		36
xxxG-23x/S		36
xxxG-29x/S		36
xxxG-36x/S		36
xxxG-48x/S		36
xxxT-12x/S		36
xxxT-17x/S		36

---

## Important information

The specifications and instructions for our customers in this document reflect the product engineering level at the time of manufacturing. PMA accepts no liability for damages resulting from unprofessional installation or application or misuse for a purpose. This disclaimer also includes damages to third parties. It is the customer's responsibility to check the delivered products and immediately notify PMA of detected faults. It is also the customer's responsibility to test the delivered product on its applicability for the intended purpose. PMA will accept no liability or responsibility for their products if a product or a PMA system is combined or used together with third-party products, i.e. products from other companies than PMA.

Jurisdiction in all legal disputes concerning product liability have the courts of the canton of Zurich/Switzerland. Swiss law applies.

To guarantee punctual deliveries please check availability of products before ordering.

The text, pictures, drawings and application photos which are published in this document may not, in part, or totally, be copied or used by any third party in any form or way. Especially the downloading of text, pictures, drawings, and application photos onto Online Services is strictly forbidden, irrespective of if they are edited for this purpose or not. At all times PMA reserves the right to take all legal steps necessary.

For more information go to:  
**[www.pma.ch](http://www.pma.ch)**

## Further information

Visit our website

Visit the PMA product web pages on [pma.ch](http://pma.ch) for our most up-to-date product lineup, and much more. This is the place to go to find all of the planning documents you need at your fingertips, including:

- Technical data sheets
- General technical details
- CAD files
- Brochures
- Videos



### Additional information

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.





---

### **PMA Headquarters**

ABB Switzerland Ltd.  
PMA Cable Protection  
Aathalstrasse 90  
CH-8610 Uster  
Phone +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

---

### **PMA Sales offices**

#### **Austria**

ABB AG  
Low Voltage Products  
Clemens-Holzmeister-Strasse 4  
A-1109 Wien  
Phone +43 / 1 60109 6530  
Fax +43 / 1 60109 8600  
abb.lpvs@at.abb.com  
www.pma-at.com

#### **France**

ABB France  
18, Avenue du Québec  
Néflier, Villebon Silic 607  
F-91945 Courtabœuf Cédex  
Phone +33 / 169 59 16 66  
Fax +33 / 169 59 16 69  
www.pma.ch

#### **Germany**

ABB STOTZ-KONTAKT GmbH  
PMA Kabelschutzsysteme  
Robert-Bosch-Strasse 7  
DE-97437 Hassfurt  
Tel: +49 / 95 21 / 9 57 71-0  
Fax: +49 / 95 21/9 57 71-11  
pma-de.info@de.abb.com  
www.pma-de.com

#### **Italy**

ABB S.P.A.  
Via Luciano Lama 33  
IT-20099 Sesto S. Giovanni (MI)  
Phone +39 02 2415 000  
Fax +39 02 2414 8008  
contact.center@it.abb.com  
www.pma.ch

#### **Spain**

Asea Brown Boveri, S.A.  
C/San Romualdo, 13  
E- 28037 Madrid  
Tel: +34 / 915 81 93 93  
Fax: +34 / 917 54 51 50  
ES-PMA\_Info@abb.com  
www.pma.ch

#### **United Kingdom**

ABB Ltd.  
PMA Cable Protection  
Unit 4 Imperial Court, Magellan Close  
Walworth Industrial Estate  
UK-Andover, Hants SP10 5NT  
Tel: +44 / 1264 333527  
Fax: +44 / 1264 333643  
lv.enquiries@gb.abb.com  
www.pma.ch

#### **USA**

ABB Installation Products  
Electrification Products Division  
860 Ridge Lake Blvd.  
Memphis, TN 38120  
+1 901-252-5000  
elec\_custserv@tnb.com  
tnb.abb.com

