
HUBBELL
Wiring Device-Kellems

Non-Metallic Raceway, BaseTrak Series, 2-Gang Inline Device Box

By Hubbell Wiring Device-Kellems
Catalog # PB3IND2G

Non-Metallic Raceway BaseTrak, 2-Gang Inline Device Box

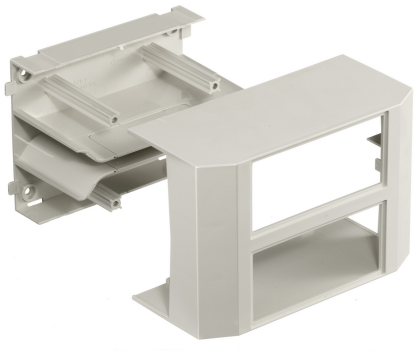

Features

- Reduces inventory requirements
- Eliminates need to order three separate boxes
- Boxes available in low, standard and deep profiles

Performance

Environmental - Flame Rating - UL94V-0, Environmental - Temperature Range - -25.6° to 158° F

Specifications

Standards - RoHS Compliance Status	CM
EU RoHS Indicator	Contact Manufacturer
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A

Configuration

Number of Gang(s)	2-Gang

General

Color	Office White
Style	In-Line
Series	PB3
Specifications	• Crush Resistance - 300 lbs. • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
UPC	783585090870
Type	Boxes
Item Type	PB3 BaseTrak Series

Logistics

Carton Quantity	10

Product Assets

Catalog [English]
Catalog Page [English]
Installation Manual [Spanish, French, English]

© 2026 Hubbell Incorporated. All rights reserved