
HUBBELL
Wiring Device-Kellems

Non-Metallic Raceway, Latching LANTRAK, Base and Cover, Flat Elbow

By Hubbell Wiring Device-Kellems
Catalog # PL1FEBC

Non-Metallic Raceway Latching LANTRAK, Base and Cover, Flat Elbow

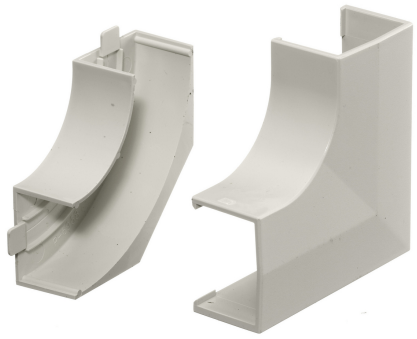

Features

- Full capacity 1¼ in. bend radius flat elbow

Performance

Environmental - Flame Rating - UL94V-0, Environmental - Temperature Range - -25.6° to 158° F

Specifications

EU RoHS Indicator	Contact Manufacturer
Industry Standard(s)	• CSA Standard C22.2 no. 62 • E118895 / E119190 • UL Standard UL 5A

General

Color	Office White
Style	Flat
Series	• PL1
Specifications	• PP1 • Crush Resistance - 300 lbs. • Impact Resistance - 5 ft. lbs. • Material - UV Stabilized PVC
UPC	783585090276
Type	Elbows
Item Type	PL1 LANTrak (Latching) Series
Material	Non-Metallic

Logistics

Pallet Quantity	2080
Carton Quantity	10

Product Assets

Catalog [English]
Catalog Page [English]
Catalog Page [English]
Installation Manual [Spanish, French, English]

© 2026 Hubbell Incorporated. All rights reserved