



3 in. Liquidtight Straight Connector, Insulated

By RACO
Catalog # [3522](#)

3 in. Liquidtight Straight Connector, Insulated


Features

- Use with flexible metallic liquidtight conduit and Type B flexible nonmetallic liquidtight conduit
- Zinc-electroplated for added corrosion protection
- Insulated
- Innovative split gland-ring assures a perfect seal, preventing pullouts
- Available in trade sizes 3/8 in. through 4 in.
- Sealing washer and heavy-duty locknut included
- All components are reusable

Specifications

Certified Listed	• UL Listed • CSA Certified
Buy American Compliant	Contact Manufacturer
Environmental Conditions	Wet Location
EU RoHS Indicator	Contact Manufacturer
Hazardous Rating(s)	• Class I, Division 2 • Class II Division 1 & 2 • Class III, Division 1 & 2
Industry Standard(s)	UL 514B
Buy America(n) Qualified	Contact Manufacturer

Dimensions

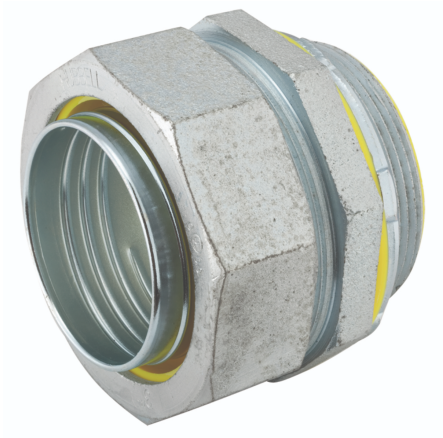

Trade Size	3 in
Length	4.75 in
Width	4.75 in
Weight	3.616 lb.
Height	3.813 in
Dimensions	4.75 in x 4.75 in x 3.813 in

General

Fitting Type	Connectors
Insulation Type	Insulated
Conduit Type	Flexible Metal Conduit
Material	3522
UPC	050169035221

Logistics

Minimum Pack Quantity	1
Carton Quantity	1
Pallet Quantity	640

Product Assets

- [Catalog \[English\]](#)
- [Catalog \[English\]](#)
- [Catalog Page \[English\]](#)
- [Catalog Page \[English\]](#)