
DIMENSIONS

| | |
|---|---|
| A | 1.30 |
| B HEX | 1.00" |
| C DIA. | 1.09 |
| D BORE | 0.61 |
| E | 0.56 ✳ |
| F | 0.56 |
| G | 12 DEG. ✳ |
| H DIA. | 0.791✳ |
| J DIA. | 0.900 |
| K | .150 MAX |
| N | 1"–16 ✳ |
| T | 1/2"–14 NPT ✳ |
| L | 30° CHAMFER TO .980" DIA. TYP. ON BOTH SIDES OF HEX |

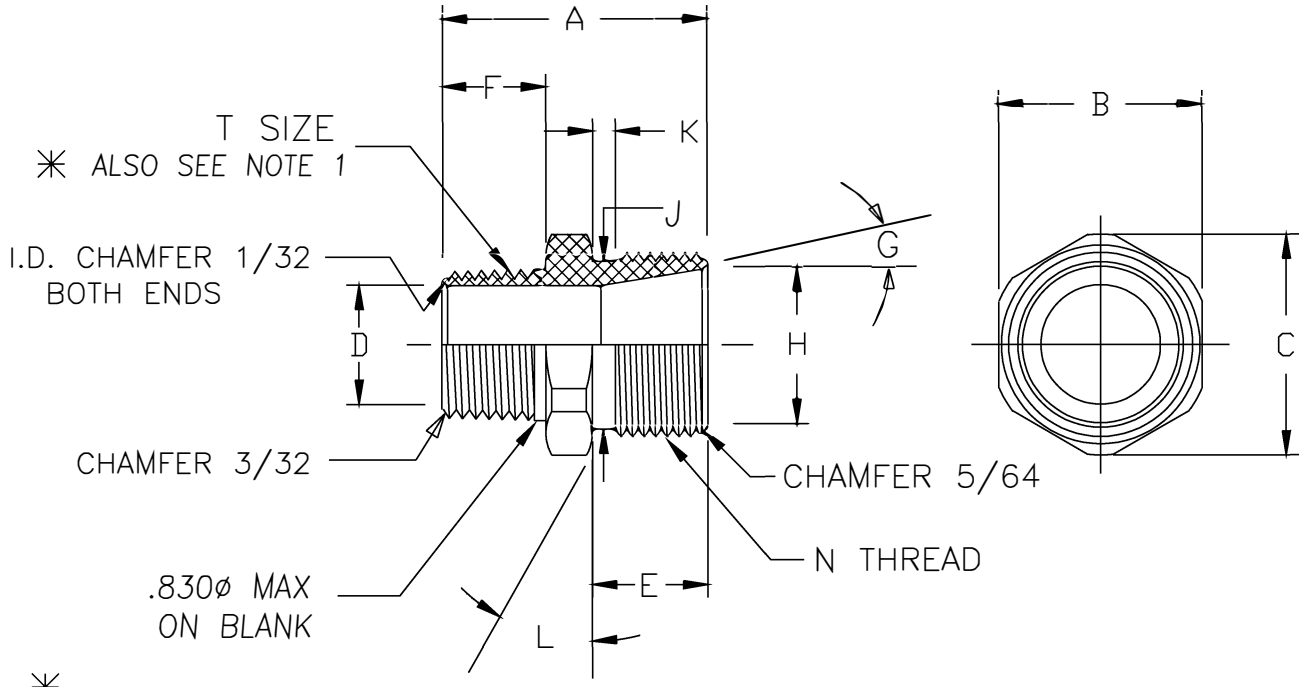


NOTES:

✳ 1.) MACHINE FULL NPT THREAD WITHIN .050" OF BOTTOM SIDE OF HEX.

| REV. | DATE | CHANGE |
|---|---|---|
| A | 4/6/95 | CHANGE J DIM TO .900 |
| B | 4/25/95 | CHANGE D DIM TO 0.617 |
| C | 1/6/98 | ADD TOLERANCE CHART |
| D | 3/6/98 | CHANGE TO MACHINED BAR STOCK |
| E | 1/12/00 | CHANGE DIM H TO .79 |

UNLESS OTHERWISE SPECIFIED
3–PLC. DIM.+/–.005
2–PLC. DIM.+/–.010
1–PLC. DIM.+/–.015
FRACTIONAL +/–1/64
ANGULAR+/–1/2°

BRIDGEPORT

| | |
|---|---|
| SCALE: | APPROX FULL |
| MATERIAL: | 6262T6511 |
| FINISH: | NATURAL |
| PART NAME: | BODY |
| PART NUMBER: | RSR–100–B |
| DRAWING DATE: | 831003 |