

Product data sheet

Specifications



discrete output module Modicon Momentum - 16 O solid state

170ADO34000

Main

Range of product	Modicon Momentum automation platform
Product or component type	Discrete output base DC
Group of channels	2 groups of 8 outputs
Discrete output number	16
Discrete output type	Solid state switch
Discrete output voltage	24 V DC
Current per channel	0.5 A
Short-circuit protection	Outputs electronically protected
Protective treatment	TC

Complementary

[Ue] rated operational voltage	24 V DC
Discrete output current	4 A per group 8 A per module
Maximum leakage current	1 mA 24 V DC
Surge current	5 A during 1 ms
Maximum voltage drop	<0.5 V 0.5 A at state 1
Output overload protection	Outputs electronically protected
Response time	0.1 ms from state 0 to state 1 0.1 ms from state 1 to state 0
Isolation between channels and bus	500 V AC
Power dissipation	3.5 W typical 4.5 W maximum
Marking	CE
Local signalling	16 LEDs for channel status
Current consumption	250 mA at 24 V DC

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Terminals description PLC n°1	(14)OUT_DIS#14 (2L+)PW_POS (L+)PW_POS (5)OUT_DIS#5 (1)OUT_DIS#1 (15)OUT_DIS#15 (M-)PW_NEG (12)OUT_DIS#12 (8)OUT_DIS#8 (4)OUT_DIS#4 (16)OUT_DIS#16 (6)OUT_DIS#6 (2)OUT_DIS#2 (10)OUT_DIS#10 (11)OUT_DIS#11 TB (13)OUT_DIS#13 (7)OUT_DIS#7 (9)OUT_DIS#9 (3)OUT_DIS#3 (1L+)PW_POS
Depth	47.5 mm
Height	141.5 mm
Width	125 mm
Net weight	0.21 kg

Environment

Product certifications	UL FM Class 1 Division 2 CSA
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...1000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	5.7 cm
Package 1 Width	18.2 cm
Package 1 Length	26.0 cm
Package 1 Weight	384.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	10
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	3.84 kg
Unit Type of Package 3	P06

Number of Units in Package 3	80
Package 3 Height	75.0 cm
Package 3 Width	40.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	43.9 kg

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

No

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

SCIP Number

441d5619-6318-4bbf-ac83-96d05888ee7e

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

End of life manual availability

[End of Life Information](#)


Take-back

No

Dimensions Drawings


Standard Adapter on a Typical Base

Dimensions

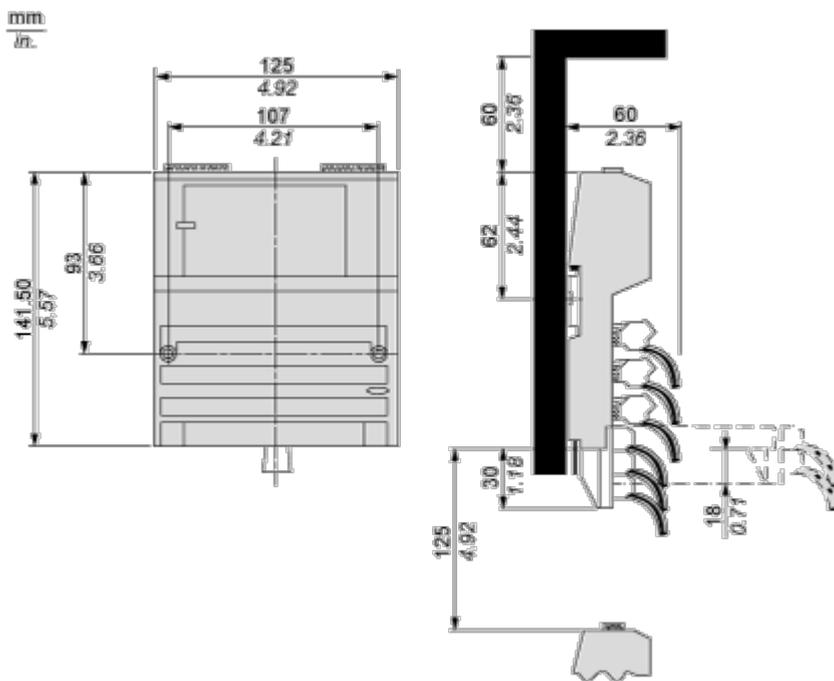

Mounting and Clearance


Mounting on a Wall

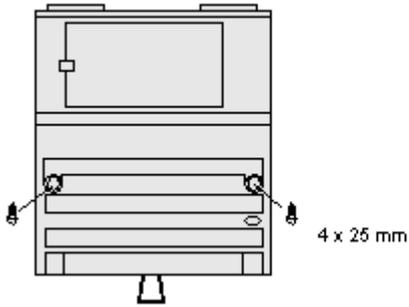


Connections and Schema

External Wiring Diagrams

2-Wire Actuator

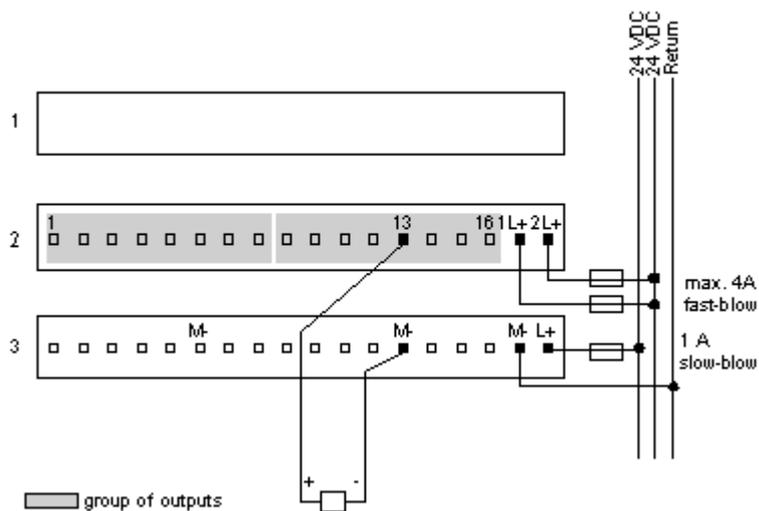

3-Wire Actuator

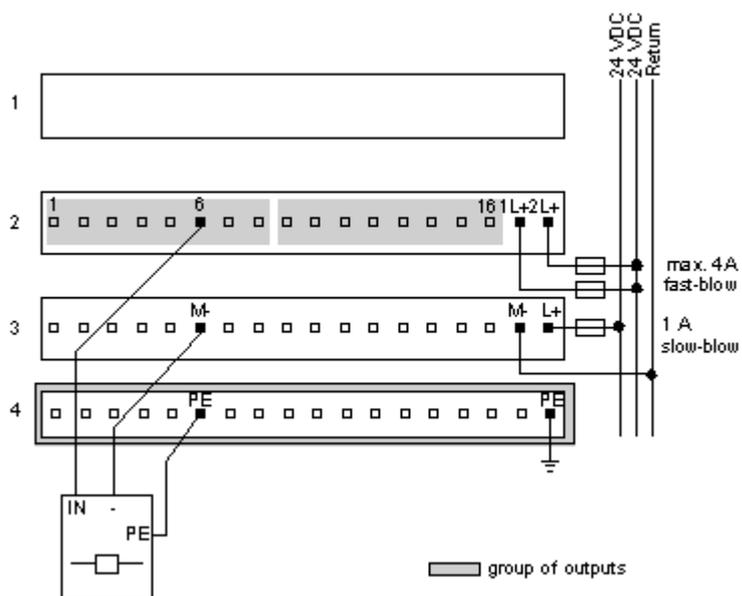

Internal Pin Connections

Rows 1 through 3 show the internal connections between terminals on the I/O base. Row 4 shows the internal connections on the optional busbar.

