Product data sheet

Specifications

Socket, SE Relays general purpose relay accessory, 3PDT, 12A, 300 V, 11 pins, lift terminals, 750/750H series

70-750E11-1

To be discontinued

⚠ To be discontinued on: Jun 30, 2026

Product availability: Stock - Normally stocked in distribution facility

Main

Product Range	Legacy
Product Type	Socket
Product Compatibility	relay 750XCXR relay 750XCXH suppressor module 70-ASMM diode 70-ASMD signalling device 70-ASMLG suppressor module 70-ASMR jumper wire 16-750CBJ-1
Number of Terminals	11
Switch Function	3PDT
Contact Composition	3 NO + 3 NC

Complementary

Rated Current	12 A
[Ue] rated operational voltage	300 V
Contact Terminal Arrangement	Separate
Connections Terminals	Panel lift terminals, clamping connection capacity:2 x 2.5...2 x 4 mm², AWG 14...AWG 12 flexible with cable end
Tightening Torque	< 0.8 N.m
Fixing Mode	By screw M3.5, M3.5 panel Clip-on 35 mm DIN rail
Shape of Screw Head	Combination roundhead
Product Weight	3.0 oz (85 g)
Width	1.5 in (38 mm)
Depth	2.2 in (57 mm)

Environment

Ambient Air Temperature for Storage	-40…221 °F (-40…105 °C)
Ambient Air Temperature for Operation	-40…131 °F (-40…55 °C)
IP Degree of Protection	IP20
Flame Retardance	UL94-V0

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Product Certifications	UL
	CSA
	CE

Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3606480278013
Returnability	Yes
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.2 in (5.7 cm)
Package 1 Width	1.5 in (3.8 cm)
Package 1 Length	2.2 in (5.7 cm)
Package weight(Lbs)	3.0 oz (85 g)

🌀 Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained 〉

How we assess product sustainability 〉

🍃 Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	**1**
Environmental Disclosure	**Product Environmental Profile**

Use Better
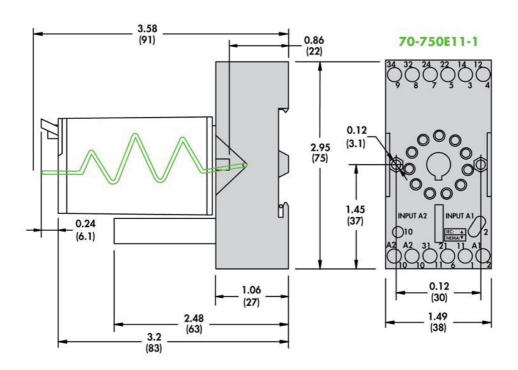
🗇 Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Pro-active compliance (Product out of EU RoHS legal scope)**
REACh Regulation	**REACh Declaration**
California proposition 65	**WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov**

Use Again

↻ Repack and remanufacture

Circularity Profile	**No need of specific recycling operations**
Take-back	**No**

Dimensions Drawings

Approximate Dimensions

Connections and Schema

Connections and Wiring Diagrams

34 32 24 22 14 12
9   8   7   5   3   4

Wiring Diagram
Top View

7   6   5
8   4
9   3
10   2
11 1

MODULE
INPUT

10—10 11 6   1   2
A2 A2 31 21 11 A1
INPUT   INPUT

NEMA
IEC