


Product data sheet

Specifications



Light block, Harmony 9001K,
Harmony 9001SK, shallow depth,
30mm, LED red, 24-28V

9001KM55LR

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product	Harmony 9001K Harmony 9001SK
Product or Component Type	Light block
Device short name	9001K
Bulb base	BA 9s
Light block supply	Direct

Complementary

Product Weight	0.254 lb(US) (0.115 kg)
Light source	LED
Light block colour	Red
[Us] rated supply voltage	24...28 V AC/DC
[Us] rated supply voltage	24...28 V
Light block supply	Full voltage
Light source colour	Red
Dimension type	Shallow depth
Size	30 mm

Environment

Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
IP degree of protection	IP10 IEC 60529
Standards	UL 508 JIS C 852 JIS C 4520 IEC 60947-5-4 IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-1
Product Certifications	NEMA UL 508
Electrical shock protection class	Class II conforming to IEC 61140
Vibration resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn IEC 60068-2-27

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ordering and shipping details

Category	US10CS121435
Discount Schedule	0CS1
GTIN	785901771432
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.800 in (4.572 cm)
Package 1 Width	2.100 in (5.334 cm)
Package 1 Length	3.600 in (9.144 cm)
Package weight(Lbs)	4.000 oz (113.398 g)

Contractual warranty

Warranty (in months)	18
----------------------	----

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


 Lifetime extension	
Repair	No

Use Again

 Repack and remanufacture	
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

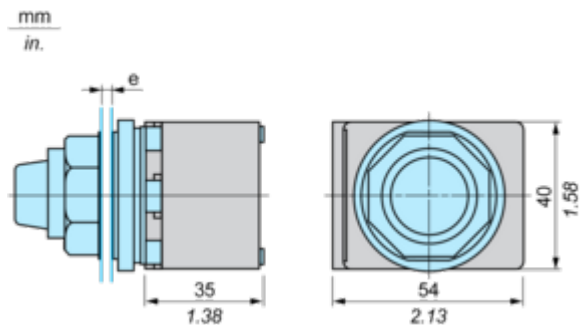

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.