

Product data sheet

Specifications



Pilot light, Harmony 9001K, metal, polycarbonate, domed, blue, 30mm, 24...28V

9001KP35L9

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product Harmony 9001K

Product or Component Type Pilot light

Device short name 9001K

Complementary

Bezel material Metal

Mounting diameter 1.2 in (30 mm)

Shape of signaling unit head Round

Lens type Domed plastic

Cap/operator or lens colour Blue

Light source incandescent

Bulb base BA 9s

Light block supply Direct 24...28 V AC/DC

Connections - terminals Screw clamp terminals, 1 x 0.22...2 x 1.5 mm² IEC 60947-1

Tightening torque 7.08 lbf.in (0.8 N.m) IEC 60947-1

Shape of screw head Cross slotted

Shape of screw head Cross slotted

Operating position Any position

[Ui] rated insulation voltage 250 V 2)IEC 60947-1

[Uiimp] rated impulse withstand voltage 2.5 kV IEC 60947-1

Short-circuit protection 10 A cartridge fuse IEC 60947-5-1

Light source Incandescent bulb

[Ith] conventional free air thermal current 10 A

CAD overall width 2.1 in (54 mm)

CAD overall height 2.8 in (70 mm)

CAD overall depth 1.7 in (42 mm)

[Us] rated supply voltage 24...28 V AC/DC

Net Weight 0.295 lb(US) (0.134 kg)

Device presentation Complete product

Lens type Domed

[Us] rated supply voltage 24...28 V

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Light block supply	Full voltage
Lens material	Polycarbonate
Size	30 mm

Environment

Standards	CSA C22.2 No 14 EN/IEC 60947-5-1 EN/IEC 60947-1 JIS C8201-5-1 EN/IEC 60947-5-4 UL 508 JIS C 852 JIS C8201-1
Product Certifications	NEMA UL 508
Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Vibration resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn IEC 60068-2-27
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP66 IEC 60529
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 NEMA 6

Ordering and shipping details

Category	US10CS121426
Discount Schedule	0CS1
GTIN	785901625896
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.80 in (4.572 cm)
Package 1 Width	2.10 in (5.334 cm)
Package 1 Length	3.60 in (9.144 cm)
Package weight(Lbs)	8.000 oz (226.796 g)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d
REACH Regulation	REACH Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

Repack and remanufacture

Take-back	No
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

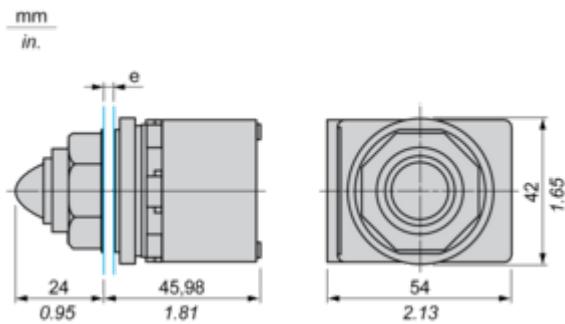

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Offer Marketing Illustration

Product benefits / Features

Features

Harmony 9001K



- 

Improved security thanks to finger-safe contact blocks and light modules
- 

Single screw Contact Block Fastening
- 

Robustness to withstand the harshest environments
- 

Large metal set of accessories to customize your product
- 

Automatic self-grounding operators without additional wiring

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony 9001K



Image of product in real life situation

