

Product data sheet

Specifications



30mm Push Button, Type K, push button, extended guard, universal

9001KR2U

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------------|----------------------|
| Range of Product | Harmony 9001K |
| Product or Component Type | Head for push-button |
| Device short name | 9001K |
| Operator profile | recessed, unmarked |
| Operator additional information | Metal guard |

Complementary

| | |
|-------------------------------|-------------------------|
| Mounting diameter | 1.2 in (30 mm) |
| Shape of signaling unit head | Round |
| Type of operator | spring return |
| Net Weight | 0.192 lb(US) (0.087 kg) |
| Bezel material | Metal |
| Cap/operator or lens colour | 7 colours choice |
| Operator profile | Recessed |
| Type of operator | Spring return |
| Contacts type and composition | Without contact block |

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US10CS121426 |
| Discount Schedule | 0CS1 |
| GTIN | 785901874812 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------|----------------------|
| Unit Type of Package 1 | PCE |
| Nbr. of units in pkg. | 1 |
| Package 1 Height | 1.85 in (4.700 cm) |
| Package 1 Width | 2.17 in (5.500 cm) |
| Package 1 Length | 3.66 in (9.300 cm) |
| Package weight(Lbs) | 3.880 oz (110.000 g) |
| Unit Type of Package 2 | S01 |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|-------------------------------------|-------------------------|
| Number of Units in Package 2 | 24 |
| Package 2 Height | 5.91 in (15.000 cm) |
| Package 2 Width | 5.91 in (15.000 cm) |
| Package 2 Length | 15.75 in (40.000 cm) |
| Package 2 Weight | 6.226 lb(US) (2.824 kg) |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Use Better


| Materials and Substances | |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes |
| Packaging without single use plastic | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| SCIP Number | Ae0c4eb9-0bf4-40a4-851f-5c619f777d |
| REACH Regulation | REACH Declaration |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

Use Again

| Repack and remanufacture | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Take-back | No |
| WEEE |  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Dimensions Drawings


Dimensions

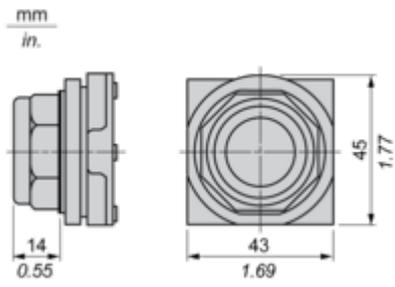

Mounting and Clearance

Contact Block Mounting Position


Top and Rear views

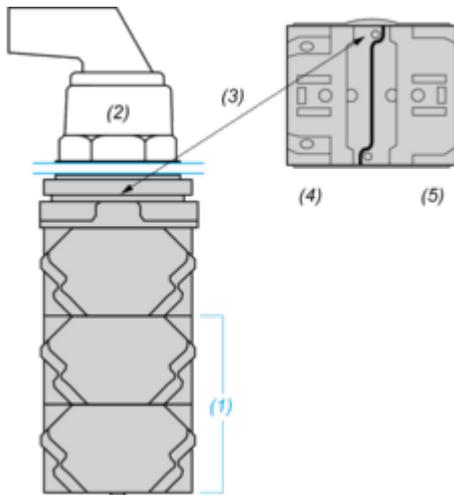

- (1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)
- (2) Operator
- (3) Locating notch
- (4) Side 1
- (5) Side 2

Panel Cut-Out


Clearance

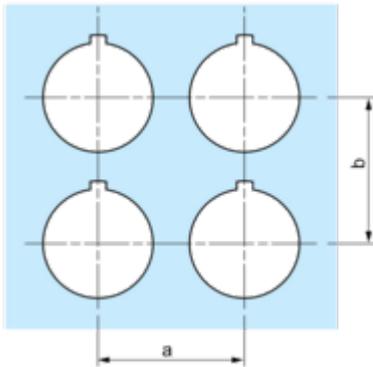

| Legend plate | a min. | | b min. | |
|--------------|--------|------|--------|------|
| | mm | in. | mm | in. |
| 9001KN2•• | 57.2 | 2.25 | 44.5 | 1.75 |
| 9001KN3•• | 57.2 | 2.25 | 50.8 | 2.00 |

Individual Cut-outs Details

2 alternatives

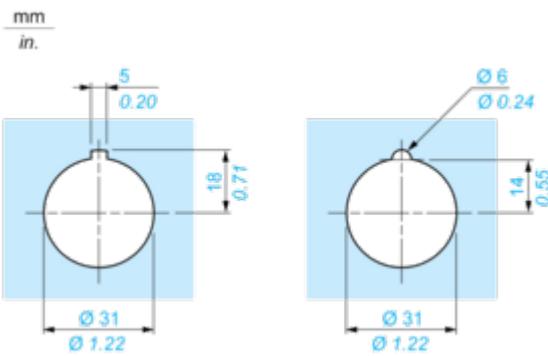

Offer Marketing Illustration

Product benefits / Features

Features
Harmony 9001K



- 

Improved security thanks to finger-safe contact blocks and light modules
- 

Single screw Contact Block Fastening
- 

Robustness to withstand the harshest environments
- 

Automatic self-grounding operators without additional wiring
- 

Large metal set of accessories to customize your product

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony 9001K



Image of product / Alternate images

Alternative







