

Product data sheet

Specifications



30mm Push Button, Type K,
selector switch, 3 position, C cam,
spring return both sides to center,
black knob

9001KS53B

Product availability: Stock - Normally stocked in distribution facility

Main

Range of Product	Harmony 9001K
Product or Component Type	Head for selector switch
Device short name	K
Type of operator	spring return
Operator profile	Black standard knob

Complementary

Bezel material	Metal
Mounting diameter	1.2 in (30 mm)
Operator position information	3 positions
Contacts type and composition	Without contact block
Mechanical durability	0.5 Mcycles
Device presentation	Basic element
Cap/operator or lens colour	Black
Operator profile	Standard handle
Type of operator	Spring return
Size	30 mm
Return	Both sides to centre
Cam profile	3

Environment

IP Degree of Protection	IP65/IP66
NEMA degree of protection	NEMA 3R/6/13
Product Certifications	UL listed file E42259 CCN NKCR CE CSA LR24590 class 3211 03

Ordering and shipping details

Category	US10CS121426
Discount Schedule	0CS1
GTIN	785901322740
Returnability	Yes

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Country of origin	MX
-------------------	----

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	2.800 in (7.112 cm)
Package 1 Width	2.300 in (5.842 cm)
Package 1 Length	2.100 in (5.334 cm)
Package weight(Lbs)	4.32 oz (122.47 g)

Contractual warranty

Warranty (in months)	18
----------------------	----

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

 Environmental footprint	
Total lifecycle Carbon footprint	1 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	0.7 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0.1 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	0 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.3 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better

 Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
SCIP Number	Ae0c4eb9-0bfb-40a4-851f-5c619fbe777d
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Longer


 Lifetime extension	
Repair	No

Use Again

 Repack and remanufacture	
Recyclability potential, in %	49
Circularity Profile	End of Life Information
Take-back	No
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions

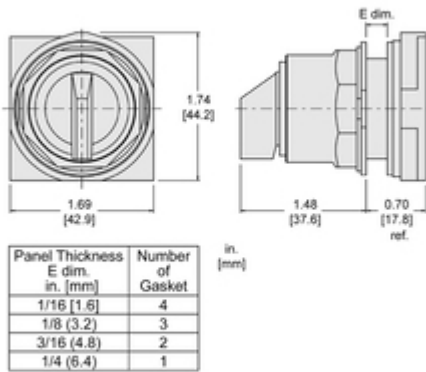

Offer Marketing Illustration

Product benefits / Features

Technical Benefits
Harmony 9001K



Offer Marketing Illustration

Product benefits / Features

Features

Harmony 9001K



Improved security thanks to finger-safe contact blocks and light modules



Single screw Contact Block Fastening



Robustness to withstand the harshest environments



Automatic self-grounding operators without additional wiring



Large metal set of accessories to customize your product



Image of product / Alternate images

Alternative



