

Product data sheet

Specifications



Pilot light, Harmony 9001SK, plastic, polycarbonate, domed, white, 30mm, LED white, 120V

9001SKP38LWW9

Product availability: Stock - Normally stocked in distribution facility

Main

| | |
|---------------------------|--------------------|
| Range of Product | Harmony 9001SK |
| Product or Component Type | Pilot light |
| Device short name | 9001SK |
| Lens type | Domed plastic |
| Light block supply | Direct 120 V AC/DC |

Complementary

| | |
|---|---|
| Bezel material | Plastic |
| Mounting diameter | 1.2 in (30 mm) |
| Shape of signaling unit head | Round |
| Cap/operator or lens colour | White |
| Light source | LED |
| Bulb base | BA 9s |
| [Us] rated supply voltage | 120 V AC/DC |
| Tightening torque | 7.08 lbf.in (0.8 N.m) IEC 60947-1 |
| Shape of screw head | Cross slotted |
| Connections - terminals | Screw clamp terminals, 1 x 0.22...2 x 1.5 mm ² IEC 60947-1 |
| [Ith] conventional free air thermal current | 10 A |
| Short-circuit protection | 10 A cartridge fuse IEC 60947-5-1 |
| [Ui] rated insulation voltage | 250 V 2)IEC 60947-1 |
| [Uimp] rated impulse withstand voltage | 2.5 kV IEC 60947-1 |
| Operating position | Any position |
| CAD overall width | 2.1 in (54 mm) |
| CAD overall height | 2.8 in (70 mm) |
| CAD overall depth | 1.7 in (42 mm) |
| Net Weight | 0.181 lb(US) (0.082 kg) |
| Device presentation | Complete product |
| Lens type | Domed |
| [Us] rated supply voltage | 120 V |
| Light source colour | White |
| Lens material | Polycarbonate |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|--------------|-------|
| Size | 30 mm |
| Light source | LED |

Environment

| | |
|---------------------------------------|---|
| Electrical shock protection class | Class II conforming to IEC 61140 |
| Protective treatment | TC |
| IP degree of protection | IP66 IEC 60529 |
| NEMA degree of protection | NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 NEMA 4X |
| Vibration resistance | 7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 50 gn IEC 60068-2-27 |
| Ambient Air Temperature for Operation | -13...158 °F (-25...70 °C) |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| Standards | UL 508 JIS C 852 IEC 60947-5-4 JIS C8201-5-1 IEC 60947-1 CSA C22.2 No 14 IEC 60947-5-1 JIS C8201-1 |
| Product Certifications | UL 508 NEMA |

Ordering and shipping details

| | |
|-------------------|--------------|
| Category | US10CS121429 |
| Discount Schedule | 0CS1 |
| GTIN | 785901791058 |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------|---------------------|
| Unit Type of Package 1 | PCE |
| Nbr. of units in pkg. | 1 |
| Package 1 Height | 2.20 in (5.588 cm) |
| Package 1 Width | 1.80 in (4.572 cm) |
| Package 1 Length | 3.70 in (9.398 cm) |
| Package weight(Lbs) | 2.880 oz (81.647 g) |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

[Environmental Disclosure](#)

[Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard

Yes

Packaging without single use plastic

Yes

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation

[REACH Declaration](#)

California proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Use Again

Repack and remanufacture

Circularity Profile

[End of Life Information](#)

Take-back


No

WEEE

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

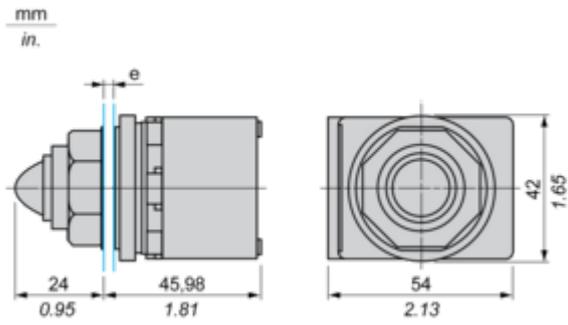

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony 9001SK



Offer Marketing Illustration

Product benefits / Features

Features
Harmony 9001SK



- 

Improved security thanks to finger-safe contact blocks and light modules
- 

Single screw Contact Block Fastening
- 

Robustness to withstand the harshest environments
- 

Automatic self-grounding operators without additional wiring
- 

Large metal set of accessories to customize your product