

Product data sheet

Specifications



**Illuminated push-button head,
Harmony 9001SK, plastic,
mushroom 41mm, red, 30mm, 2
positions, push-pull, LED red,
24-28V**

9001SKR9P35LRR

**Product availability: Non-Stock - Not normally stocked in
distribution facility**

Main

Range of Product Harmony 9001SK

Product or Component Type Head for illuminated push-button

Device short name 9001SK

Type of operator stay put

Operator profile Red mushroom Ø 41 mm, unmarked

Light block supply Direct

Complementary

Bezel material Plastic

Mounting diameter 1.2 in (30 mm)

Net Weight 0.498 lb(US) (0.226 kg)

Operating position Any position

Shape of signaling unit head Round

Operator position information 2 positions

Contacts type and composition Without contact block

Mechanical durability 5000000 cycles

Light source incandescent

Light source LED

Bulb base BA 9s

[Us] rated supply voltage 24 V AC/DC

[Us] rated supply voltage 24 V AC/DC

Cap/operator or lens colour Red

[Us] rated supply voltage 24...28 V

Light source colour Red

Operator profile Mushroom Ø 41 mm

Type of operator Push-pull

Operator additional information Screw-on plastic

Size 30 mm

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Ambient Air Temperature for Operation	-13...158 °F (-25...70 °C)
Electrical shock protection class	Class II conforming to IEC 61140
IP degree of protection	IP66 IEC 60529
NEMA degree of protection	NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 NEMA 4X
Standards	JIS C 4520 UL 508 IEC 60947-1 IEC 60947-5-1 CSA C22.2 No 14 IEC 60947-5-4 JIS C 852
Product Certifications	UL 508 NEMA
Vibration resistance	7 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn IEC 60068-2-27

Ordering and shipping details

Category	US10CS121429
Discount Schedule	0CS1
GTIN	785901839514
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.80 in (4.572 cm)
Package 1 Width	2.20 in (5.588 cm)
Package 1 Length	3.70 in (9.398 cm)
Package weight(Lbs)	3.52 oz (99.79 g)

Contractual warranty

Warranty	18 months
----------	-----------



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)

1

Use Better

Materials and Substances

Packaging made with recycled cardboard Yes

Packaging without single use plastic Yes

[EU RoHS Directive](#) Pro-active compliance (Product out of EU RoHS legal scope)

REACH Regulation [REACH Declaration](#)

California proposition 65 WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)

Use Again


Repack and remanufacture

Take-back No

WEEE  The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions Drawings

Dimensions

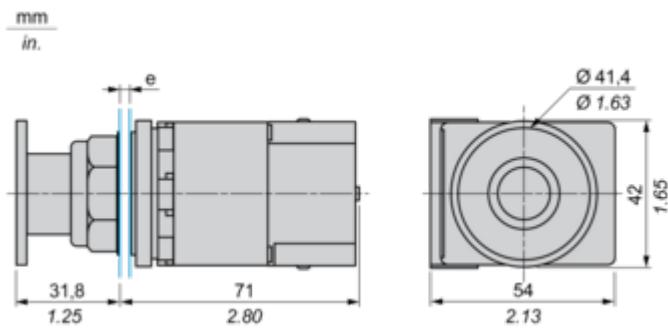

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.

Mounting and Clearance

Contact Block Mounting Position

Top and Rear views



(1) It is possible to mount up to 3 levels of contacts blocks (maximum of 6 contacts blocks)

(2) Operator

(3) Locating notch

(4) Side 1

(5) Side 2

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony 9001SK



Offer Marketing Illustration

Product benefits / Features

